


Series 6, Domino Electric hob, 30 cm, , PKF375FP2E

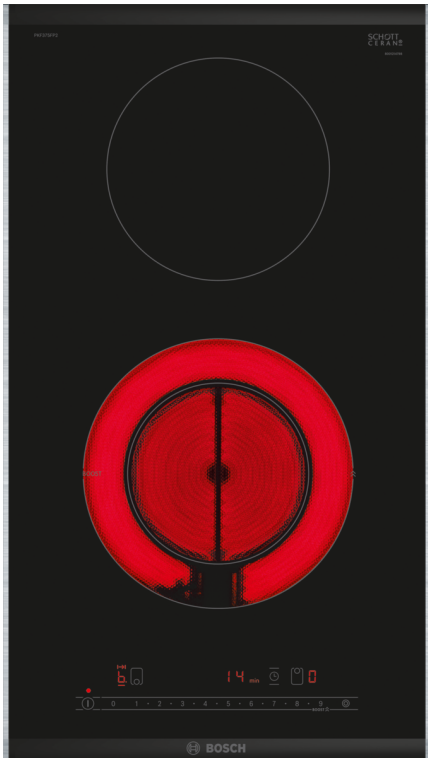

The radiant hob of the Domino programme: makes cooking and cleaning especially easy.

- The 18 cm cooking zone - extendable cooking zone.
- ComfortProfil: Elegant, appealing design with bevelled front and metal strips on the side.
- PowerBoost: selectable boost in power output for a 20% shorter time to boiling.
- If you turn off the cooktop it saves the last selected setting for a short time. If the cooktop is switched of within a short time again the former settings are still available.
- Timer with switch-off function: Turns off the assigned cooking zone after the set time.

Product name/family: Vario/Domino cooking zone cera
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Total number of positions that can be used at the same time: 2
 Min. required niche size for installation (HxWxD): 38 x x mm
 Width of the appliance: 306 mm
 Dimensions: 38 x 306 x 527 mm
 Dimensions of the packed product (HxWxD): 120 x 380 x 590 mm
 Net weight: 4.5 kg
 Gross weight: 5.2 kg
 Residual heat indicator: yes
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Length electrical supply cord: 100.0 cm
 Connection rating: 3500 W
 Fuse protection: 16 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



- HEZ32WA00 Wireless food thermometer
 HEZ390090 Wok Set consisting of 3 Items
 HEZ394301 Connecting strip

Series 6, Domino Electric hob, 30 cm, , PKF375FP2E

The radiant hob of the Domino programme: makes cooking and cleaning especially easy.

- 30 cm: space for 2 pots or pans.

Flexibility of cooking zones

- Dual zone: use regular or larger cookware on the expandable cooking zone.
- Cooking zone middle: 120 mm, 180 mm, 1 KW (max. power 2.3 KW)
- Cooking zone middle: 145 mm, 1.2 KW

Usage convenience

- DirectSelect touch control: directly control the power with imprinted touch bar.
- 17 power levels: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Switch off timer for every cooking zone
- : switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Timer
- : an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer
- : shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- Front: boil water more quickly thanks to 20% more energy than at the highest standard level.
- ReStart Function: in case of unintentional switch-off, restore all previous settings by switching on the hob again within 4 seconds.

Design

- Comfort profile

Safety

- 2 stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the hob.
- Main switch: switch off all cooking zones at the touch of a button.
- Power on indicator light: indicates if the hob is heating.
- Safety switch-off: for safety reasons, heating stops after a preset time without interaction (customizable).
- Energy consumption display: shows the electricity consumption of the last cooking process.



Installation

- Dimensions of the product (HxWxD mm): 38 x 306 x 527
- Required niche size for installation (HxWxD mm) : 38 x 270 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 3500 W
- Power cord: Power cord length 1m, Cable included
- adapted to be connected to 1-phase installation

Series 6, Domino Electric hob, 30 cm, , PKF375FP2E

Measurer


Measurements in n Picture for the tab cutout dimension:



L	X
306	57
396	66

If two or r to one an are requi elements


Measurer



L	X
606	118
816	139
916	149

When ins a hob, tw required


Measurer



L	X
606	87
816	108
916	118

When ins a hob, tw required


Measurer



L	X
306	88
396	97

If two or r to one an are requi elements



measurer



A: Minim to the
B: Reces
C: With fi possib for the

π
D
o
v
A
2
1
1
1
1
1
2
1
1
1
1
3
2
2
2
2
2
1
1
1
1
1
2
4
3
1
1
2
1
*

Measurer Assembl



B: Depen