GAGGENAU



Vario 200 series gas wok
VG 231

VG 231 220CA
Black aluminum control panel.
Width 12″ (28 cm).
Surface installation only.
Natural gas.
For conversion to LP gas, LP kit (Part No. 10009475) must be ordered.

Included accessories

1 wok attachment ring.

Installation accessories

VV 200 010
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

VV 200 020
Black connection strip for combination with other Vario appliances of the 200 series.

Optional accessories

VD 200 020
Black appliance cover.

WP 400 001
Wok pan made of multiple-layer material.
With round bottom and handle, ø14 3/16″, 6.3 qt., height 4″.

LS 041 001
Stainless steel, removable air deflector for gas Vario next to VL 200 downdraft.

Combinable with:

2x VL 200 120
AW 442 720
AI 230 700
AW 230 790
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights

- Can be combined with other Vario 200 series products.
- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Multi-ring burner of solid, heat-resistant brass as used in professional kitchen.
- Total output up to 18,800 BTU (5.5 kW).

Cooking zones
1 multi-ring wok burner
1,000 – 18,800 BTU (300 – 5,500 W), suitable for woks and pots up to ø 12 5/8″.

Operation
Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.
To close the cover, the cast-iron pan support can be easily reversed.


Features
Cast-iron pan support.
Brass burner rings.

Safety
Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.

Planning notes
Equipped for natural gas. For conversion to LP gas, LP kit (Part No. 10009475) must be ordered.
If using the VL 200 downdraft for ventilation, the Vario gas wok must be placed between two VL downdrafts.
Recirculation is not recommended.
Appliance can be snapped into the countertop from above.
A minimum clearance of at least 6″ (150 mm) from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 37,533 BTU (11 kW) local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 37,533 BTU (11 kW) and ventilation hood 27 1/2″ (70 cm).
Appliance weight: approx. 24 lbs (11 kg).


Please read additional planning notes on pages 98–99.

Rating
Total rating gas/electric:
18,800 BTU / 10 W.
Total amps: 15.
Electrical: 120 V / 60 Hz.
Electrical connection:
Plan for a 59″ long connecting cable with 3 prong NEMA 5-15 plug.

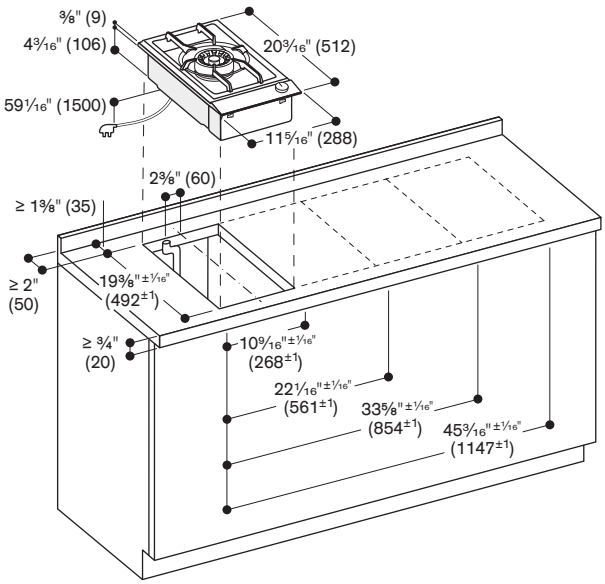

Minimum distance from the appliance cut out to the side wall 11 13/16" (300 mm).

Gas connection

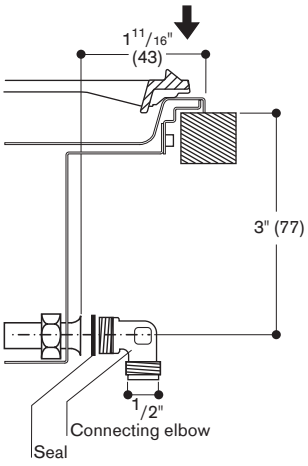

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.