
GAGGENAU



Vario 400 series electric grill
VR 414

VR 414 611
Stainless steel.
Width 15″ (38 cm).

Included accessories

1 cast-iron griddle, half size.
1 grease collecting insert.
2 cast-iron grills.
1 lava stone.
1 cleaning brush.

Installation accessories

In a combination of several Vario cooktops or VL 414 downdraft, connecting strips must be used. Choose respective VA 420 strip from one of the below, depending on type of installation.

VA 420 004
Invisible connection strip for combination with other Vario 400 series flush mounting.

VA 420 010
Connection strip for combination with other Vario 400 series appliances for surface mounting.

VA 440 010
Stainless steel appliance cover with mounting strip.
Only available for individual Vario installation.

Optional accessories

LV 030 000
Lava stones for refilling.

Additional connection cables for connecting the electronic control knobs (optional)

Part No. 12013604
1 ft (0.3 m) connection cable.

Part No. 12013606
3 3/8″ ft (1 m) connection cable.

Part No. 12013607
5 ft (1.5 m) connection cable.

Combinable with:

2x VL 414 712
AL 400 792 / AL 400 722
AW 442 720
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Important note:

If paired with VL 414 712, for best performance it's recommended to place a VL on each side of the electric grill.

Highlights

— Two zones can be operated together or separately.
— Half size cast-iron griddle included for simultaneous searing and grilling on two seperate surfaces.
— Open cast-iron grill, lava stones.
— Solid stainless steel control knobs.
— Precision crafted 3 mm stainless steel frame.
— For surface-mount installation with a visible edge or for flush installation.
— Can be perfectly combined with other Vario 400 series appliances.
— Not recommended for recirculating ventilation.

Operation

Control knobs with illuminated ring, stainless steel cooking zone and output level markings.
Electronic control in 12 output levels.

Features

Cooktop, lava stone trough and stainless steel grease collecting insert.
Two zones, each 1,500 W, can be operated together as a complete surface or each half separately.
Two-part cast grill.

Safety

Safety shut-off.
Pre-heat and residual heat indicator.

Planning notes

If using the VL 414 downdraft for ventilation, the Vario electric grill must be placed between two VL downdrafts. Recirculation is not recommended. Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut out and the knob positions may vary.
If installing with the appliance cover VA 440 take into account the additional space required for the depth.
If combining several Vario 400 series appliances, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.
The bearing capacity and stability, in the case of thin countertops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting:
Installation is possible in countertops made of stone, synthetics or solid wood.
Minimum countertop thickness ¾″ (20 mm) for surface mounted installation. Minimum countertop thickness 1 3/16″ (30 mm) for flush installation.
Heat resistant and watertight sealing of the cut edges must be observed. For a suitable heat resistant silicone please consult the countertop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the countertop cut out.
If installing several appliances in individual cut outs, allow for a minimum distance of 1 15/16″ (50 mm) between the cooktops.
A minimum lateral clearance of at least 4″ from adjacent heat-sensitive cabinets or from the wall must be observed.
Recirculation is not recommended for the electric grill.
It is recommended that the electric grill is installed, if possible, in the center of the cooktop configuration and not at the edge.
Appliance can be snapped into the countertop from above.
Appliance weight: approx. 57.3 lbs.


Rating

Total rating: 3,000 W (240 V).
Total amps: 16.
Electrical: 208 / 220–240 V / 60 Hz.
Electrical connection:
Hardwire required, 59″ cable length.

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

GAGGENAU


Surface-mount Installation

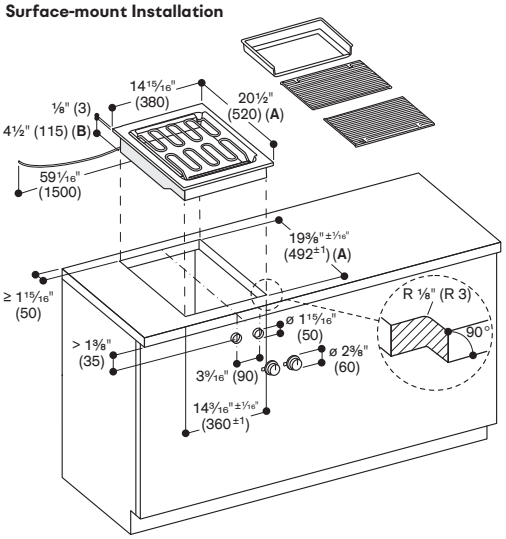

A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)
B: 5⅛" (130 mm) in the area of the cable clamp (left, on the rear side)

Minimum countertop thickness ¾" (20 mm) for surface mounted installation.
See separate planning notes on page 86.


Flush-mount Installation

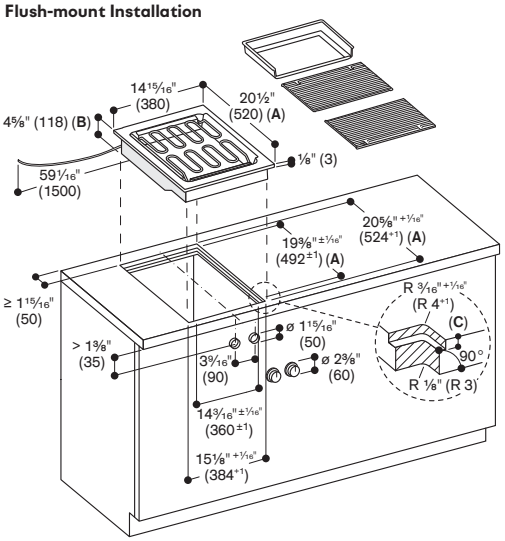


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)
B: 5¼" (133 mm) in the area of the cable clamp (left, on the rear side)
C: ⅛" (3.5$^{0.5}$)

Minimum countertop thickness 1 3/16" (30 mm) for flush installation.
See separate planning notes on page 84.


Installation of the control knob: surface mounting

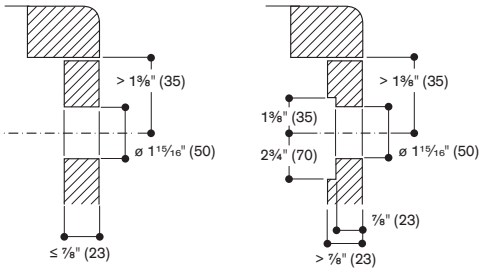

Installation of the control knob: flush mounting

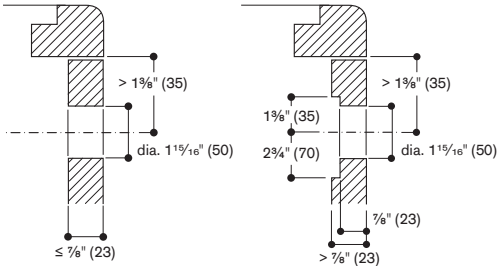


Gas connection

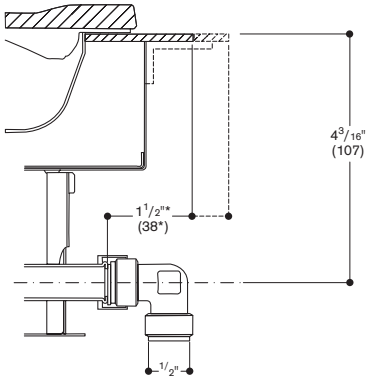


* 2 1/16" (53 mm) with appliance cover.

View from above




A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)

Longitudinal section

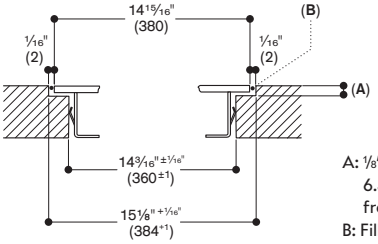

A: ⅛" (3.5–0.5)
6.5+0.5 in combinations with frameless induction cooktops
B: Fill with silicone

Cross-section

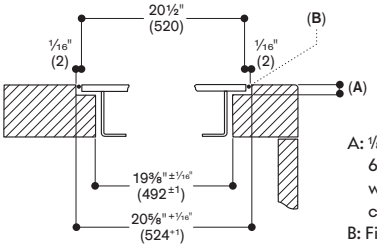

A: ⅛" (3.5–0.5)
6.5+0.5 in combinations with frameless induction cooktops
B: Fill with silicone

When installing a single Vario with an appliance cover,
see separate planning notes on page 89.

PFAS

Numbers indicated
inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.