GAGGENAU



200 series two-door bottom freezer
RB 282

RB 282 705
Two-door bottom freezer
without ice maker.
Fully integrated.
Width: 22¼" (56 cm).

Included accessories

2 ice packs.
3 egg trays.
1 wine and champagne rack.
1 ice cube tray with lid.

Optional accessories

RA 430 100
Storage container with transparent lid, anthracite.

RA 260 000
Heavy duty hinge support for a maximum door weight of 59 lb (27 kg).

Highlights

— 4 climate zones incl. two fresh cooling drawers close to 32 °F.
— Height adjustable safety glass shelves.
— Door bins with aluminum profiles.
— Soft-close door closing system.
— ENERGY STAR® certified.
— Total unit gross capacity 8.3 cu.ft.

Operation
Electronic precision temperature control with digital temperature display.
Touch keys.

Technical Features
Automatic defrosting with defrost water evaporation.
Soft-closing door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction warning system.

Selected digital services (Gaggenau Home Connect)
Remote control and monitoring.

Please read additional information on Gaggenau Home Connect® on page 267.

Cooling compartment
Fast cooling.
Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C).
2 safety glass shelves, height adjustable, of which 1 is extendable.
1 integrated shelf.
Wine and champagne rack for 4 bottles, can be completely folded.
1 large door rack with aluminum profile for bottles with flexible bottle holder.
1 door rack with aluminum profile.
Bright interior lighting with integrated glare-free side light element.

Fresh cooling close to 32 °F (0 °C)
1 fully extendable fresh cooling drawer close to 32 °F (0 °C), illuminated.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.
Ideal for meat, fish and poultry.


Freezer compartment
No-frost technology with fast freezing.
Temperature adjustable from 3 °F to -11 °F (-16 °C to -24 °C).
Defrost assistance.
Storage time after a malfunction 8 h.
3 freezer drawers, 1 of which extra large.
2 safety glass shelves.

Consumption data
Energy consumption 388 kWh/year.
Noise level 37 dBA.


Planning notes
Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight:
Upper door 42 lb (19 kg).
Lower door 42 lb (19 kg).

Consider the RA 260 000 accessory for heavier custom door panels.

Rating
Total rating 1,060 W/24h
Total Amps: 10 A.
Connecting cable 59" with ground plug.

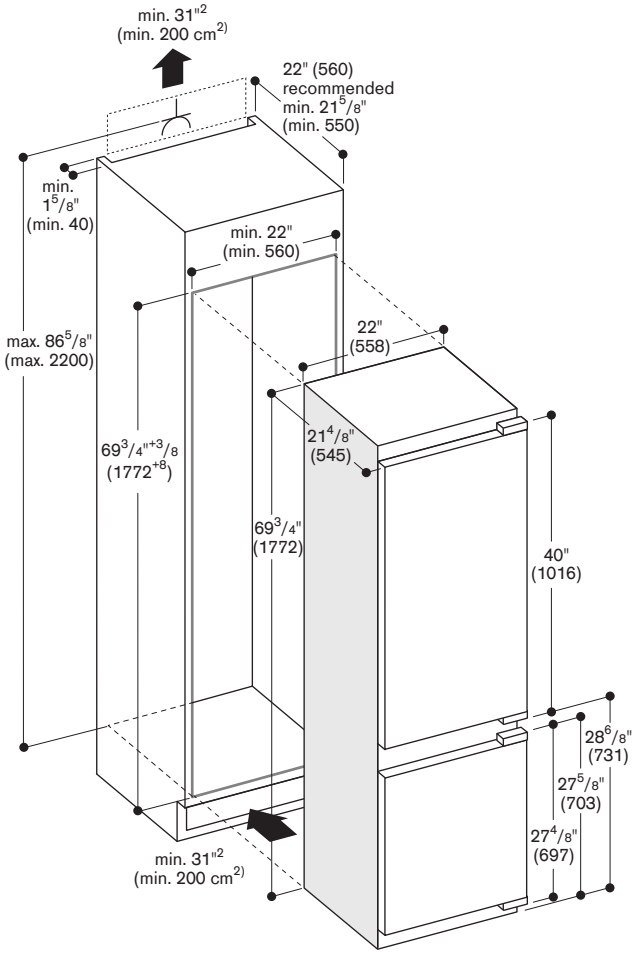

Side view (cabinet)

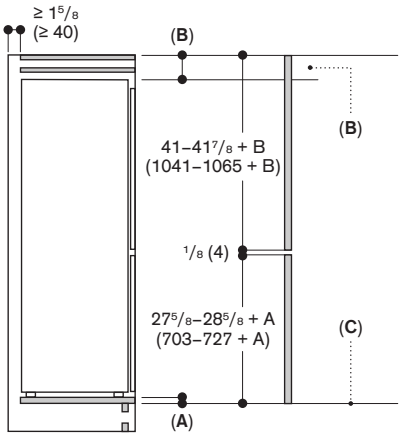

A: Cabinet shelf
B: Front panel overhang
C: Lower edge of front panel
The specified unit door dimensions are valid for a door gap of 1/8" (4 mm)

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.