GAGGENAU



200 series gas cooktop
VG 295

VG 295 150CA
Stainless steel control panel
Width 36″ (90 cm)
Liquid gas

VG 295 250CA
Stainless steel control panel
Width 36″ (90 cm)
Natural gas.

Included accessories

1 wok attachment ring.

Optional accessories

WP 400 001
Wok pan made of multiple-layer material with round bottom and handle ø14 3/16″, 6.3 qt., height 4″.

Combinable with:

AI 442 720
AW 442 720
AI 230 700
AW 230 790
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights

— Control panel for comfortable and secure operation.
— Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
— Multi-ring burner of solid, heat-resistant brass as used in professional kitchen.
— Solid smooth-surface cast-iron pan support.
— Up to 59,700 BTU (17 kW) on 5 burners.

Cooking zones

VG 295 150CA
1 multi-ring wok burner
1,000 – 17,000 BTU (300 W – 5,000 W), suitable for pots up to max. ø 12 5/8″.
2 two-ring high output burners
600 – 13,600 BTU (170 W – 4,000 W), suitable for pots up to max. ø 11″.
2 two-ring standard burners
600 - 6,800 BTU (170 W – 2,000 W), suitable for pots up to max. ø 9 1/2″.

VG 295 250CA
1 multi-ring wok burner
1,000 – 18,800 BTU (300 W – 5,500 W), suitable for pots up to max. ø 12 5/8″.
2 two-ring high output burners
600 – 13,600 BTU (170 W – 4,000 W), suitable for pots up to max. ø 11″.
2 two-ring standard burners
600 – 6,800 BTU (170 W – 2,000 W), suitable for pots up to max. ø 9 1/2″.

Operation

Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features

Three-part cast-iron pan support with flat, continuous pot surface.
Brass burner rings.

Safety


Thermoelectric safety pilot.
Residual heat indicator.
Operation indicator.

Planning notes

No intermediate shelf required.
Appliance can be snapped into the countertop from above.
The rear panel must consist of a non-flammable material. Wall trims must be resistant to heat.
Installation in a 36″ (90 cm) wide base cabinet is required.
Above countertop minimum clearance of at least 11 13/16″ from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation must be installed.
Minimum distance between gas cooktop(s) with more than 37,533 BTU (11kW) and ventilation hood must be 30″ (76 cm).
Appliance weight: approx. 68 lbs (31 kg).


Rating

Total rating gas/electric:
58,000 / 59,700 BTU / 10 W.
Total amps: 1.
Electrical: 120 V / 60 Hz.
Electrical connection: Plan for a 59 1/16″ long connecting cable with 3 prong NEMA 5-15 plug.

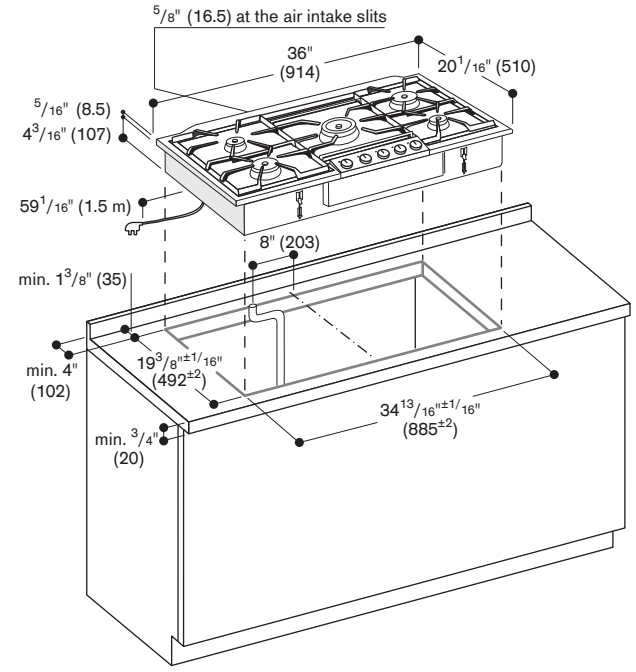

Minimum distance from the appliance cut-out to the side wall 11 13/16" (300 mm).

Gas connection

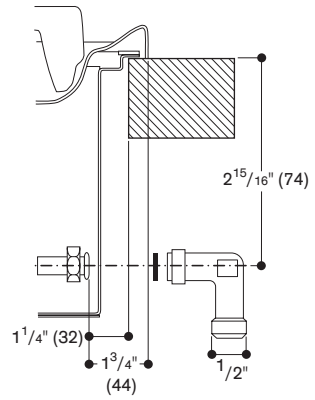

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.