

SIEMENS



5D極吸抽油煙機 5D Chimney Hood



5D 全方位極吸設計強大吸力 全方位迅速90%#油煙

5D all-round suction design quickly absorbs 90%# of oil fumes in all direction

西門子5D 極吸抽油煙機採用革新5D全方位極吸設計，從煮食爐四周及正上方全方位吸風，加上中央開孔負壓板設計，巧妙配合油煙上升規律，令油煙直達吸力核心區，提供高達**1380 m³/h**排風量及4段風速調節，全方位快速抽走90%#油煙。

With the revolutionary 5D all-round suction design, Siemens 5D chimney hood captures fume in 360°, from surrounding and bottom, coupled with the central opening deflector panel design, it cleverly harmonizes with the rising pattern of oily fume, capturing the fume at the core area of suction, result in improving the air intake effect.

The 5D chimney hood is equipped with an air exhaustion rate up to **1380 m³/h** and 4-stage wind speed adjustment, quickly remove 90%# oily fume in all directions in no time.



中央開孔負壓板
Central opening deflector panel

*適用於LC532VC9HK，經威凱檢測技術有限公司測試，針對LC532VC9HK 依據JSGF CVC071-2020 模擬使用十年後，最大風量下降2.5%，測試報告：WTS2024-7340 (04.24)。
Applicable to LC532VC9HK, ten years of simulation test based on JSGF CVC071-2020 for LC532VC9HK, the maximum extraction rate reduced by 2.5%, Test report: WTS2024-7340 issued by CVC (04.24).
#經威凱檢測技術有限公司測試，針對LC538VB9HK 及LC532VC9HK 依據GB/T 17713-2022 測試，油脂分離度為 90.3% 及90.2%，以及最大風量23m³/min，測試報告：WTSJX2024-0492, WTSJX2024-0574 (04.24)。
Grease removal at 90.3% and 90.2% and maximum extraction rate at 23 m³/min based on GB/T 17713-2022 for LC538VB9HK and LC532VC9HK, Test report WTSJX2024-0492, WTSJX2024-0574 issued by CVC (04.24).




除菌高達99.9%*：一鍵溶油 smartClean功能

99.9%* bacteria removal: smartClean


5D極吸抽油煙機採用電熱除油技術，累積運行20小時會自動提醒，輕按一鍵開啟 smartClean功能，於摩打底部以高溫溶化油污，並配合摩打轉動將油污甩至油杯，全程30分鐘，無需使用任何化學劑的情況下去除油污及99.9%*細菌。

The 5D chimney hood uses electric heating oil removal technology, simply activate the smartClean function with 1 touch and the motor will be heated up with high temperature and melt the oil stains, together with the rotation of the motor, oil stains will be melted and flow into the oil cup. The entire process takes 30 minutes without using any chemicals and proves to remove 99.9%* bacteria. And the smartClean indicator will flash after 20 usage hours.

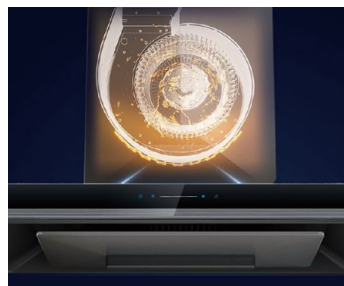

smartClean 3步曲 3-step smartClean:

清空油杯
Empty oil cup

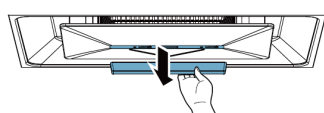

1 按啟動
1 touch activates



smartClean 30 分鐘
smartClean 30 min



簡易輕鬆清洗

Simply clean with ease

即拆即洗配件
Readily clean parts



E2C 易潔塗層
E2C (Easy-to-clean) Coating



5D極吸抽油煙機身使用特殊易潔塗層*，不沾粘油污，一擦即淨，輕鬆打理省心省力。

The body of the 5D chimney hood uses a special easy-to-clean coating with oil repellent effect, just like water beads on a lotus leaf. Simply clean with a soft cloth.

*適用於 Applicable to LC532VC9HK

*經中國家用電器研究院測試，針對LC538VB9HK 及LC532VC9HK 吸油煙機進行自清潔(smartClean)除菌測試，有效去除99.9%的大腸桿菌。測試報告：EWCK-24-217, EWCK-24-277(03.24)。
99.9% reduction on Escherichia coli in smartClean program, tested on LC538VB9HK and LC532VC9HK – Test report: EWCK-24-217, DWCK-24-277 issued by CHEARI (03.24).

廚房靈感

Kitchen Aspirations

LC532VC9HK
Delicate Gray
極智灰



產品規格 Specifications



LC532VC9HK

LC53BV9HK


顏色 Color	Delicate Gray 極智灰	Delicate Black 極智黑
產品特點 Features	<ul style="list-style-type: none"> • 強大吸力 全方位迅吸90%*油煙 Powerful suction, quickly absorbs 90%* of oil fumes in all direction • 5D 全方位極吸設計 5D all-round suction design • smartClean 功能—鍵融油除菌高達99.9%* smartClean with one touch, upto 99.9%* bacteria removal • 纖薄設計適合廚櫃嵌入式安裝 Slim design for built-in cabinet installation 	<ul style="list-style-type: none"> • 強大吸力 全方位迅吸90%*油煙 Powerful suction, quickly absorbs 90%* of oil fumes in all direction • 5D 全方位極吸設計 5D all-round suction design • smartClean 功能—鍵融油除菌高達99.9%* smartClean with one touch, upto 99.9%* bacteria removal • 纖薄設計適合廚櫃嵌入式安裝 Slim design for built-in cabinet installation
摩打 Motor	BLDC 變頻摩打	AC 摩打
排風量 Extraction rate	1380 m ³ /h	1380 m ³ /h
抽力選擇 Suction Power Selection	4 段 Level	4 段 Level
強力瞬抽 Booster	■	■
延遲關機功能 Delay off function	■	■
smartClean 功能 smartClean function	■	■
smartClean功能提示 smartClean reminder	■	■
照明燈 Illumination	型格照明燈 emotionLight	LED
控制面板 Control panel	輕觸式面板 Touch panel	輕觸式面板 Touch panel
E2C 易塗塗層 Easy-to-clean coating	■	-
最大功率 Connected load	284W (英式插頭接駁 GB plug)	314W (英式插頭接駁 GB plug)
機身尺寸 - (高 x 闊 x 深) (毫米 / 吋) Dimensions - (H x W x D) (mm / inch)	607 (640*) x 895 x 505 / 23.9 (25.2*) x 35.2 x 19.9 <small>*連油杯include oil cup</small>	607 (640*) x 895 x 505 / 23.9 (25.2*) x 35.2 x 19.9 <small>*連油杯include oil cup</small>
配件 Accessory	可調節高度裝飾罩 (2024 Q3 起提供) Telescopic decorative cover (Available in 2024 Q3)	可調節高度裝飾罩 (2024 Q3 起提供) Telescopic decorative cover (Available in 2024 Q3)
原產地 Country of origin	中國 China	中國 China

^適用於LC532VC9HK, 經威凱檢測技術有限公司測試, 針對LC532VC9HK 依據JSGF CVC071-2020 模擬使用十年後, 最大風量下降2.5%。測試報告: WTS2024-7340 (04.24).
Applicable to LC532VC9HK, ten years of simulation test based on JSGF CVC071-2020 for LC532VC9HK, the maximum extraction rate reduced by 2.5%. Test report: WTS2024-7340 issued by CVC (04.24).

*威凱檢測技術有限公司測試, 針對LC53BV9HK 及LC532VC9HK 依據GB/T 17713-2022 測試, 油脂分離度為 90.3% 及90.2%。測試報告: WTSJX2024-0492, WTSJX2024-0574 (04.24).
Grease removal at 90.3% and 90.2% based on GB/T 17713-2022 for LC53BV9HK and LC532VC9HK, Test report WTSJX2024-0492, WTSJX2024-0574 issued by CVC (04.24).

*經中國家用電器研究院測試, 針對LC53BV9HK 及LC532VC9HK 吸油煙機進行自清潔(smartClean)除菌測試, 有效去除99.9%的大腸桿菌。測試報告: EWCK-24-217, EWCK-24-277 (03.24).
99.9% reduction on Escherichia coli in smartClean program, tested on LC53BV9HK and LC532VC9HK – Test report: EWCK-24-217, DWCK-24-277 issued by CHEARI (03.24)

安裝圖 Installation diagrams

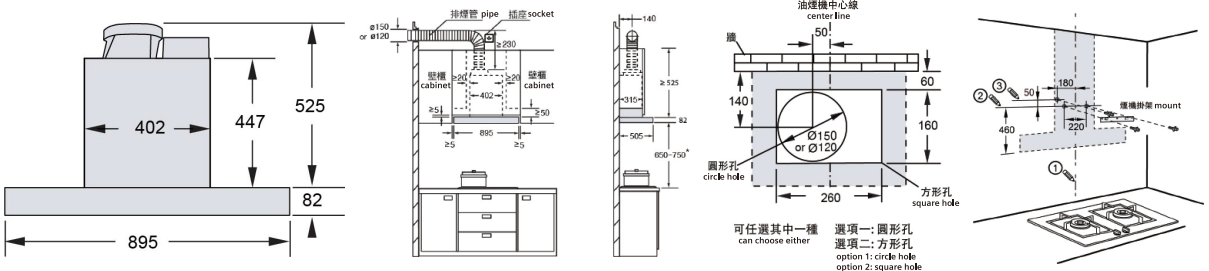

*此為與氣爐具爐架最高點的最少距離。電磁爐最少距離: 550mm
min. 650mm from upper edge of pan support (gas hob). Electric hob: min. 550mm

• 注意抽油煙機周圍與櫃體之前的間距, 抽油煙機上方的櫃門板需可拆卸。若嵌入式安裝, 請預留櫃櫃淨深度 (扣除門板厚度) > 320mm。
Please be aware of the clearance between the appliance and the cabinet. Door of upper cabinet shall be removable.
For built-in installation, please reserve > 320mm for cabinet depth (exclude door thickness).

尺寸以毫米為單位
Measurements in mm

Model numbers and specifications are for reference only and are subject to change without prior notice. Siemens is continuously seeking to improve specification, design and production of its appliances and alterations may take place regularly. All descriptions and installation diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction manual supplied with the appliance. Electrical and gas connections should only be made in accordance with the regulations of the national authorities.

Your dealer will be able to provide you with reliable information.

Right of technical modification reserved, delivery subject to availability, colors of actual products may vary from illustrations.

©2024 by BSH Home Appliances Ltd. Reproduction, complete or in part, only with the express permission of the publisher.

Customer Contact Hotline: 2565 6151 (Hong Kong) /
0800 030 (Macau local call only)
E-mail: siemens.hk.showroom@bshg.com



Siemens Home (HK)



Siemens Home HK



Siemens-home.bsh-group.com.hk