GAGGENAU



Dishwasher 400 series
DF 481/DF 480

DF 480 701
fully integrated (ADA compliant).
Euro tub, appliance height 32 3/16".

DF 481 701
fully integrated.
Tall tub, appliance height 34 1/8".

Included accessories
1 baking tray spray head.
1 Gastronorm container inserts.
1 holder for long-stemmed glasses.

Installation accessories

DA 020 011
Stainless steel side trims for DF 480.

DA 020 111
Stainless steel side trims for DF 481.

GZ 010 011
Aqua stop extension 78" (2 m) long for all dishwashers.

Optional accessories

DA 042 030
Silvercare cartridge for all dishwashers.

DA 043 000
Holder for long-stemmed glasses.
Offers safe positioning for up to four long-stemmed glasses during the dishwashing process and ensures an optimal cleaning result.
For positioning in the lower basket.

DA 045 061
3rd basket.
With smooth running rails.
For DF 481 dishwashers
3rd loading level above the upper basket.
For small bowls, cups and cooking utensiles.
Movable knife shelf.

Highlights
— Optimal protection for sensitive glassware by low temperature drying with zeolite, optimized basket design and intelligent water softening.
— 8 programs with aqua sensor and 4 options, such as Power for cleaning and drying dishes from 57 minutes and Intensive Plus for adjusting cleaning areas in the lower basket.
— Flexible basket system with smooth running rails on all levels and soft-closing upper and lower baskets.
— Perfectly illuminated interior.
— Push-to-open function for perfect integration into handleless custom cabinet fronts.
— Remaining time projection onto the kitchen floor.
— Very quiet: 42 dB.

Operation
TFT display indicating remaining or end time, refill for water softener and rinsing agent, inflow of water.
Touch key operation.
Flexible cycle time reduction, even during an active cycle.
Personalization function for storing individual combinations of programs.
Information key with use indicators.
Time delay up to 24 hours.
Visual and acoustic end of program indicator.
Remaining time projection.

Technical features
Perfectly illuminated interior.
Glass protection with zeolite.
Aqua sensor.
Load sensor.
Water softener.
Detergent recognition.
Regeneration electronics.
Heat exchanger.
Continuous flow heater.
Triple filter system.
Soft lock.
Aqua stop.

Selected digital services (Gaggenau Home Connect)
Intelligent Program for adapting a cycle based on user feedback.
Program assistant.
Temporary noise reduction.
Software updates.
Downloadable programs.*

Please read additional information on Gaggenau Home Connect® on page 267.

Programs
8 programs:
Auto 150 °F - 160 °F.
Auto 127 °F - 140 °F.
Auto 113 °F - 122 °F.
Eco 127 °F - 136 °F.
Wash and Dry 122 °F.
Glass Care 122 °F.
Quick wash 113 °F (35 min.).
Personalization function (default setting: Pre-rinse).

4 options:
Intensive Plus.
Power.
Sanitize.
Extra Dry with zeolite.

Machine Care

Interior
Flexible rack system with smooth running rails on all levels and soft-closing system of the upper and lower rack.
3rd rack for cutlery.

Upper basket:
Over extension.
Rackmatic with 3 levels, adjustable in height up to 2" (5 cm).
6 folding tines.
4 folding racks for optimal protection of glass.

Lower basket:
Motorized spray arm.
8 folding tines.
2 folding racks for optimal protection of glass.
Dividable glass support.
Cutlery basket.

Maximum dish sizes for DF 480 (upper/lower rack)
10.5"/9.8", 9.6"/10.8" or 8.6"/12.2" respectively.

Maximum dish sizes for DF 481 (upper/lower rack)
11.4"/11", 10.4"/12" or 9.4"/13.3" respectively.

13 place setting capacity.
Holder for long-stemmed glasses.
Maximum glass loading capacity 23 wine glasses.

Consumption data
ENERGY STAR® certified.
Total annual energy consumption 240 kWh.
Noise level 42 dB (re 1 pW).

Planning notes
Height-adjustable feet.
Appliance toe kick recess 3 15/16 (100 mm) (see drawing).
To display the remaining time projection, a minimum toe kick protrusion is required (1 9/16" (40 mm) + thickness of the cabinet front).
The maximum toe kick height must be reduced by 1 3/16" (30 mm) to provide an optimal display of the remaining time projection.
Rear feet adjustable at front.
Door weight up to 18 lbs. for DF 480 and 22 lbs. for DF 481.
Door panel dimension dependent on toe kick height of kitchen cabinetry.
Installation and usage with custom cabinet handle possible. The push-to-open function remains active.

Rating
Total rating: 1440 W.
Connecting cable 47 1/4" with three-prong plug (NEMA 5-15P).
Water connection with 3/4" screw joint.
Connection to hot or cold water possible.


ENERGY STAR

* Availability depending on country.


Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.

GAGGENAU


Euro Tub dishwasher DF 480

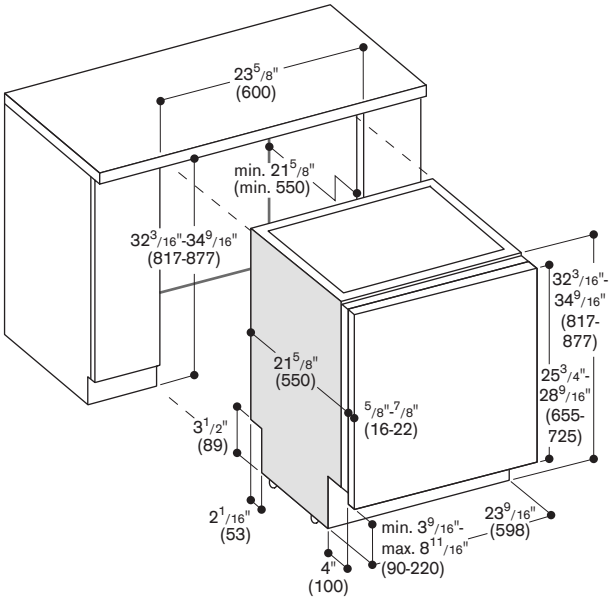

Tall Tub dishwasher DF 481

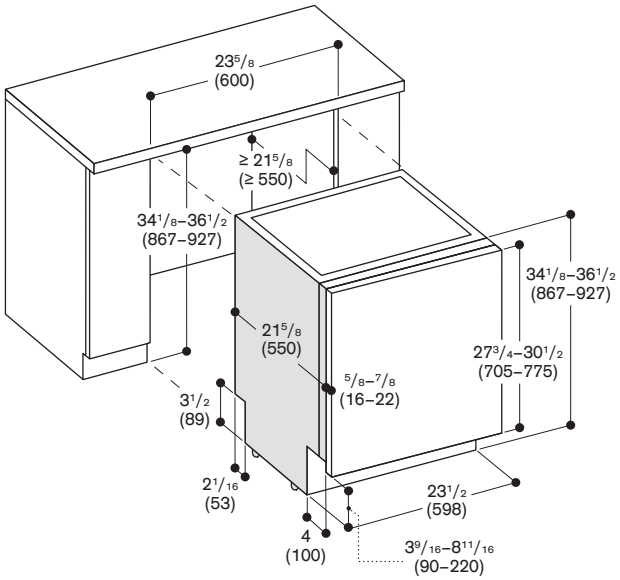

Connection dimensions for a 24" (600 mm) wide dishwasher

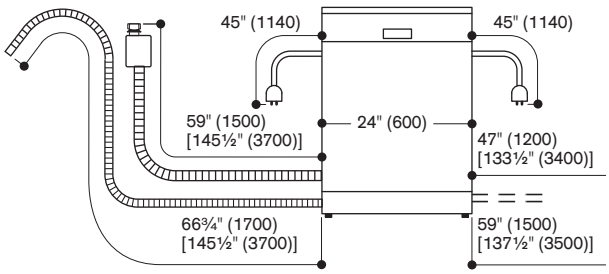

[ ] values with extension kit

Numbers indicated
inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.