GAGGENAU



Culinary warming drawer
Gaggenau Expressive series
GW 453

GW 453 720
Stainless steel behind smoked glass.
Push-to-open.
Width 24″ (60 cm),
Height 8 7/16″ (21.5 cm).

Installation accessories

Part No. 12039458
Bracket (set of 2) anti-tilt.

Highlights
- Handleless drawer.
- Bright interior lighting.
- Push-to-open function.
- Hygienic stainless steel interior with glass bottom.
- Direct temperature selection in the range 85 °F to 180 °F.
- Also for low-temperature cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting.

Heating methods
Preheating of small beverage containers/cups.
Warming cookware/plates.
Keeping meals warm.
Low-temperature cooking.
Direct temperature control.
Personalization function via Home Connect®.
16 additional programs via Home Connect®.


Operation
Touch key operation.

Features
Oven cavity size 1.3 cu.ft. (37 liters).
Volume capacity: Dinner service for 8 people including ø 10 5/8″ (27 cm) plates and soup bowls, additional bowls and a serving dish depending on size.
Capacity load max. 55 lbs. (25 kg).
Usable interior dimensions W 21 9/16″ × H 6 9/16″ × D 16 1/8″ (548 mm × 166 mm × 410 mm).
Heating system for even heat distribution and stable cavity temperature.
Status indicator, visible on the frame.
Glass bottom made of safety glass.

Selected digital services (Gaggenau Home Connect®)
Additional programs and recipes.
Remote control and monitoring.
Timing function.

Planning notes
Plan the cut out without back wall.
Protrusion from appliance front to cabinet 1 5/8″ (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
Installation directly above the drawer without intermediate shelf.
If the culinary warming drawer is built-in under a countertop or in a single cut out by itself, please add an additional 3/32″ (2 mm) clearance in the overall planning height. Additionally, please order Part No. 12039458 Anti-tilting bracket.
The electrical box must be accessible and located outside the built-in cut out.
The electrical box can be planned behind the appliance.

Rating
Total rating: 820 W (120 V).
Total amps: 6.8 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 68 7/8″ cable.

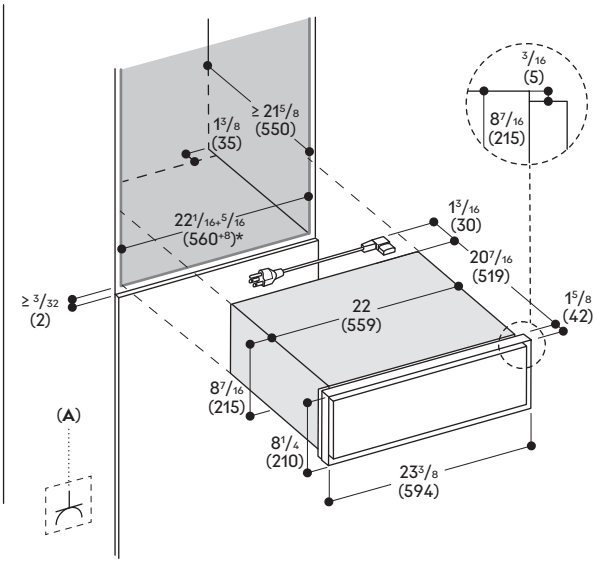

A: Accessible electrical connection
* The width tolerance as shown in the drawing indicated by the + 5/16″ (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8″ – 13/16″ (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: September 2025

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.