GAGGENAU



Vario 400 series full surface induction cooktop
CX 492

CX 492 612
Stainless steel frame.
Gray glass ceramic.
Width 36″ (90 cm).

Included accessories

1 wireless cooking sensor for temperature regulation.

Installation accessories

In a combination of several Vario cooktops, connecting strips must be used. Choose respective VA 420 strip from one of the below, depending on type of installation.

VA 420 004
Invisible connection strip for combination with other Vario 400 series for flush mounting.

VA 420 010
Connection strip for combination with other Vario 400 series for surface mounting.

Optional accessories

CA 060 600
Cooking sensor for temperature regulation within pots.

GN 232 110
Teppan Yaki plate made of multi-ply material, 13″ × 21″, GN 1/1.
For full surface induction cooktops.

Combinable with:

AL 400 792
AW 442 720
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights
- One large cooking surface.
- Free positioning of cookware.
- All sizes and formats of cookware can be used.
- TFT touch display for an intuitive control of all functions.
- Cooking sensor function for temperature control in pots.
- Professional cooking functions.
- Max. power output of up to 5,500 W for large cookware.
- Precision-crafted 3 mm stainless steel.
- For surface mounting with a visible edge or for flush mounting.
- Can be combined with other Vario 400 series appliances.

Cooking zones
One unique cooking surface allows for all sizes and formats of cookware to be used.
Up to 6 items of cookware can be placed simultaneously on the cooktop.

Operation
Easy to use color graphic TFT touch display with use indications.
Electronic power control in 17 output levels.

Features
Cooking sensor function.
Professional cooking function.
Dynamic cooking function.
Teppan Yaki function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Individual pot detection.
Short-term timer.
Stopwatch.
Options menu.
Information key with use indicators.
Power management.
Cooktop-based ventilation control.

Selected digital services (Gaggenau Home Connect)
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country.

Please read additional information on Gaggenau Home Connect® on page 267.

Safety
Main switch.
Residual heat indicator.
Child lock.
Safety shut-off.
Pause function.

Planning notes
Depending on the type of installation (surface-mounted or flush-mounted), the specific definition of the cut out must be observed.
If combining several Vario 400 series appliances, a connection strip VA 420 must be placed between the appliances.
Depending on the type of installation, the corresponding connection strip must be provided.
The weight bearing capacity and stability, in the case of thin countertops in particular, must be supported using suitable substructures.
Take into account the appliance weight and additional loads.
Additional instructions for flush mounting:
Installation is possible in countertops made of stone, synthetics or solid wood. Heat resistant and watertight sealing of the cut edges must be observed. For a suitable heat resistant silicone please consult the countertop manufacturer.
Minimum countertop thickness ¾″ (20 mm) for surface mounted installation. Minimum countertop thickness 1 3/16″ (30 mm) for flush installation.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.
Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the countertop cut out.

Please read additional planning notes on page 84 and 86.

If installing several appliances in individual cut outs allow for a division bar of minimum 2″ (50 mm) between the individual cut outs.
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of flat bottom cookware is recommended.
The wok pan WP 400 001 cannot be used with this appliance.
To insure that the appliance works correctly, the cooktop must be sufficiently ventilated either from the rear or base of the cabinet.
Please see the installation instructions for further detail.
Appliance can be snapped into the countertop from above.
Appliance weight: approx. 87 lb. (39 kg).


Please read the installation details regarding air ducting on page 127.

Rating
Total rating: 6,240 W (208 / 220 V).
7,200 W (240 V).
Total amps: 30.
Electrical: 208 / 220–240 V / 60 Hz.
Electrical connection:
Hardwire required, 37″ cable length.

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.


GAGGENAU

Surface-mount Installation

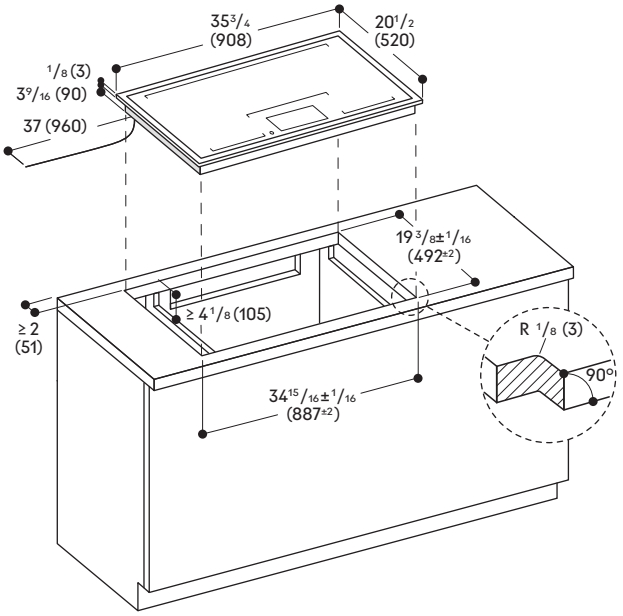


Minimum countertop thickness ¾″ (20 mm) for surface mounted installation.

Flush-mount Installation

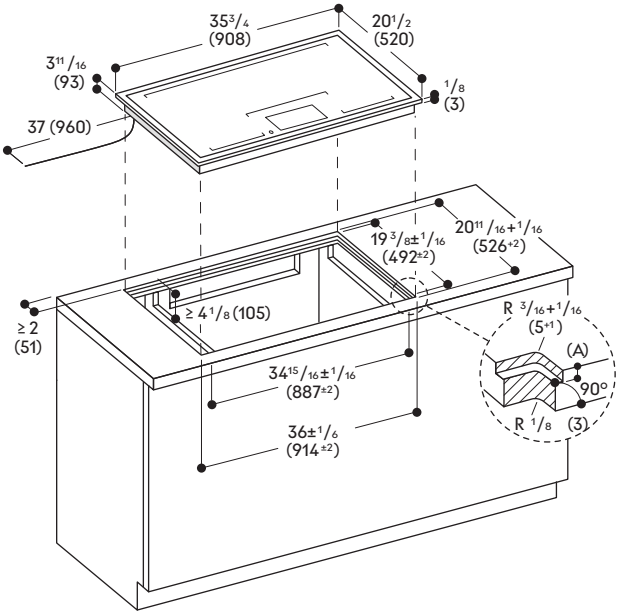


Minimum countertop thickness 1 3/16″ (30 mm) for flush installation.

View from above

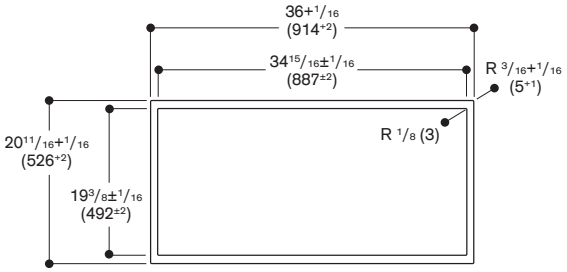


Longitudinal section

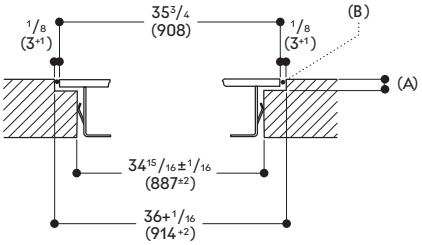

A: ⅛″ (3.5–0.5)
B: Fill with silicone

Cross-section

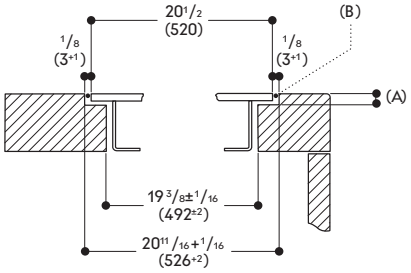

A: ⅛″ (3.5 -0.5)
B: Fill with silicone

Numbers indicated
inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.