


The Extendable Rack is designed to allow easier access to cooking foods. The slide arms extend as far as the standard flat rack. The top section then extends even further, bringing the food closer to the cook.


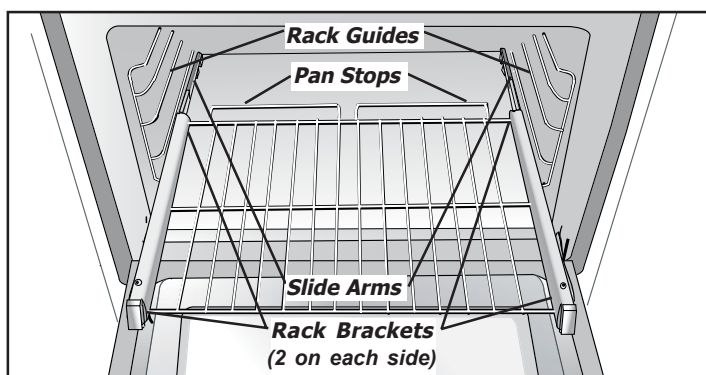


Caution:

When the rack is outside of the oven, slide arms do not lock. They could unexpectedly extend if the rack is carried incorrectly. Extending slide arms could cause injury. **Rack should *only* be held or carried by grasping the sides (Fig. A) or the pan stops (Fig. B).**

Figure A

Figure B



Use:


Grasp the front of the rack and pull straight out or push straight in. The rack will stop when fully extended or closed.



Caution: Always place oven racks in desired location while oven is cool. If rack must be moved while oven is hot, use a potholder or oven mitt on both hands. Do not let potholder touch hot heating element(s). Always use two hands when removing or replacing an oven rack.

Placing the Rack in the Oven:


1. With rack in the closed position, grasp rack from both sides.

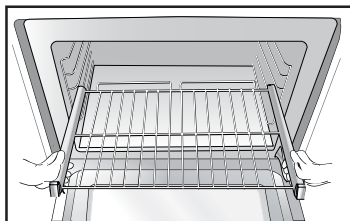


2. Slide back brackets (1 on each side) over desired rack guide.

(Over)


- Slide rack along guides until front bracket meets guide.



- Press up and in on front of rack until front brackets snap into place.
- Test rack operation. Pull out until it stops. The rack should glide easily and be straight, not crooked. It should not come all the way out of the oven. Verify that back brackets straddle rack guide. If rack does not stop, is crooked, or does not glide, remove and reinstall.



Correct positioning - back brackets straddle rack guides



Incorrect positioning - back brackets do not straddle rack guides


Note: The rack is not properly installed until the front brackets are pushed beyond the front of the rack guides and the rack drops into place.



Caution: If rack is not inserted properly, food items placed on the rack could tilt and spill causing injury.

Removing the Rack from the Oven:

- With rack in the closed position, grasp both sections, lift front of rack up and pull out until first bracket is beyond the rack guide.



- Grasp entire rack (including slides) from both sides and pull straight out until second bracket clears rack guide.
- Lift last bracket over rack guide. Pull up and out.

