Setting up Home Connect

Tip: Connect your appliance to a mobile device. You can conveniently change all settings via the Home Connect app.

- 1. Install the Home Connect app on your mobile device and follow the instructions.
- 2. Scan the QR code using the Home Connect app.



GET IT ON

Google Play

on the	manual.	
20	Hardness range	mmol/l
<u>.</u>	Soft	0 - 1.1
19	Soft	1.2 - 1.4

be selected here.

Overview of water hardness settings	
You can find an overview of the Medium	1.5 -

Setting

value

H:00

H:01

1.5 - 1.8 Medium water hardness values that can Medium 1.9 - 2.1 2.2 - 2.9 Medium A table of country-specific units 3.0 - 3.7 Hard can be found in the instruction Hard 3.8 - 5.4 Hard 5.5 - 8.9

Setting the water softening sys-	Programmes	
tem	The programme	

1. Press ().

H:02

H:03

H·04

H:05

H:06


H:07

- 2. To open the basic settings, press Setup 3 sec. for 3 seconds.
- ✓ The display shows H:xx.
- The display shows set.
- 3. Press or + repeatedly until the right water hardness has been set.
- 4. To save the settings, press Setup 3 sec. for 3 seconds.

The programme data has been measured in the laboratory according to European standard EN 60436. The consumption figures depend on the programme and additional function selected.

The runtime will change if the rinse aid system is switched off or rinse aid needs to be added.

Programme	1) Duration [h:min] 2) Energy [kWh] 3) Water [l]
ſ <u></u>	1) 2:10 - 2:15
Intensive 70°	2) 1,300 - 1,350 3) 9,0 - 12,0
Auto Auto 45-65°	1) 1:45 - 2:45 2) 0,750 - 1,250 3) 5,0 - 14,0
Eco	1) 4:35 2) 0,920
Eco 50°	3) 6,7
(Îh)	1) 1:00 2) 1,200
Express 65° - 1h	3) 10,0
Ġ	1) 0:35 ¹ 2) 0,700
Express 45°	3) 10,0
	1) 2:15 2) 1,350
Machine Care	3) 13,0
	1) 0:15 - 0:15 2) 0,050 - 0,050
Favourite	3) 4,0 - 4,0
¹ half standard load	

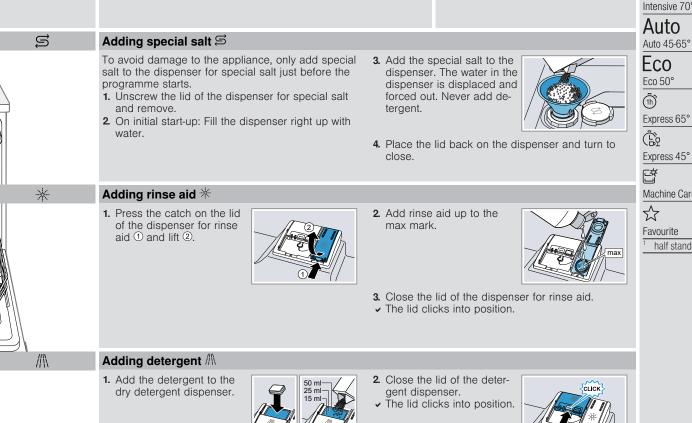

How to use your appliance

1. Load the tableware.

Only clean tableware that is suitable for dishwashers. Remove large remnants of food from the tableware. Check that the spray arms can ro-


- tate freely.
- 2. Add detergent.
- 3. Switch on the appliance O.

- 4. Select the programme.
- 5. Start the programme Start.
- 6. Remove the tableware at the end of the programme.
- 7. To cancel the programme, press Reset 4 sec. for approx. 4 seconds. The programme is cancelled and ends after approx. 1 minute.



Cleaning filters

- 1. After each wash check the filters for residue.
- 2. Turn the coarse filter anticlockwise ① and remove the filter system ②.



3. Pull down the micro filter to remove.

)



- 5. Clean the filter elements under running water.
- $\textbf{6.} \ \text{Re-assemble the filter system}.$
- Insert the filter system into the appliance and turn the coarse filter clockwise. Make sure that the arrow markings match up.

leaning	spray	arms


4. Insert the lower spray arm.The spray arm clicks into position.

- **1.** Unscrew the upper spray arm ① and pull down to remove ②.
- 2. Pull up the lower spray arm to remove.

3. Check the outlet nozzles on the spray arms for blockages un-

der running water and remove any foreign bodies.

5. Insert the upper spray arm and screw it firmly in place.



Clean wastewater pump

- **1.** Disconnect the appliance from the power supply.
- 2. Remove the filter system.
- **3.** Scoop out any water.
- **4.** Prise off the pump cover using a spoon and grip it by the crosspiece.



- **5.** Lift the pump cover inwards at an angle and remove.
- **6.** Remove any remnants of food and foreign bodies in the area of the impeller.
- 7. Insert the pump cover ① and press down ②.
- The pump cover clicks into position.



8. Install the filter system.

Troubleshooting

Cumply head is biglight		Cause and troubleshooting	Fault	Cause and troubleshooting
- Supply hose is kinked. ► Install the supply hose without kinks.	E:92-40 will light up al- ternately.	Filters are soiled or blocked. Clean the filters.	Removable streaks are present on glasses, glass- ware with a metallic ap- pearance and cutlery. Rust spots on cutlery.	Amount of rinse aid to be dispensed is set too high.Set the rinse aid system to a lower setting.
Water tap is turned off. Turn on the water tap.	E:61-02 will light up al- ternately.	Wastewater pump is blocked. Clean the wastewater pump. 		No rinse aid has been added. ► Add rinse aid.
 Water tap is jammed or furred up. Turn on the water tap. The flow rate must be at least 10 l/min when the water supply is open. The filters in the water connection of the supply or AquaStop hose are blocked. 1. Switch off the appliance. 2. Pull out the mains plug. 3. Turn off the water tap. 4. Unscrew the water connection. 5. Remove the filter from the supply hose 		 Cover of the wastewater pump is loose Secure the cover of the Wastewater pump so it clicks into position. 		Cutlery is not sufficiently rust-resistant. Knife blades are often more severely affected. • Use rust-resistant tableware.
	Remnants of food on tableware.	Tableware is placed too close together or basket is overfilled. 1. Arrange tableware with sufficient space in between.		Cutlery may also rust if washed together with rusting items. Do not wash rusting items.
	I he spray jets must reach the surfaces of the tableware.2 Avoid points of contact.	Detergent residue is present in the detergent	Spray arms were blocked by tableware so detergent was not rinsed out.	
		 Spray arm rotation is blocked. Arrange tableware so that it does not obstruct spray arm rotation. 		 Check that the spray arms are not blocked and can rotate freely.
		Spray arm nozzles are blocked. ► Clean the Spray arms.		
		Filters are soiled. ► Clean the filters.		
6. Clean the filter.		Filters are inserted incorrectly and/or not engaged. 1. Insert the filters properly. 2. Engage the filters.		
 Re-insert the filter in the supply hose. Screw the water connection back on. Check the water connection for leaks. Restore the power supply. 		 Washing programme selected too weak. Select a more intensive washing programme. Adjust the sensitivity of the sensors. 		
	 Turn on the water tap. Water tap is jammed or furred up. Turn on the water tap. The flow rate must be at least 10 I/min when the water supply is open. The fliters in the water connection of the supply or AquaStop hose are blocked. Switch off the appliance. Pull out the mains plug. Turn off the water tap. Unscrew the water connection. Remove the filter from the supply hose Clean the filter. Re-insert the filter in the supply hose. Screw the water connection back on. Check the water connection for leaks. 	 Turn on the water tap. Water tap is jammed or furred up. Turn on the water tap. The flow rate must be at least 10 l/min when the water supply is open. The filters in the water connection of the supply or AquaStop hose are blocked. Switch off the appliance. Pull out the mains plug. Turn off the water tap. Unscrew the water connection. Remove the filter from the supply hose Clean the filter. Re-insert the filter in the supply hose. Screw the water connection back on. Check the water connection for leaks. Restore the power supply. 	 Turn on the water tap. Water tap is jammed or furred up. Turn on the water tap. The flow rate must be at least 10 l/min when the water supply is open. The filters in the water connection of the supply or AquaStophose are blocked. 1. Switch off the appliance. 2. Pull out the mains plug. 3. Turn off the water tap. 4. Unscrew the water connection. 5. Remove the filter from the supply hose. 6. Clean the filter. 7. Reinsert the filter in the supply hose. 8. Screw the water connection back on. 9. Cheas the water connection to relaxs. 10. Restore the power supply. 	 Turn on the water tap. Clean the waster tap. Clean the wastewater pump. Clean the wastewater pump. Cover of the wastewater pump is loose Secure the cover of the Wastewater pump so it clicks into position. Secure the cover of the Wastewater pump so it clicks into position. Remnants of food on tableware. Switch off the appliance. Avoid points of contact. Secure the water connection. Secure the filter from the sup-ply hose. Clean the filter. Reinsert the filter in the supply hose. Screw the water connection for leaks. Clean the filters. Reinsert the filter in the supply hose. Screw the water connection for leaks. Clean the filters. Arrange tableware supply.