




3

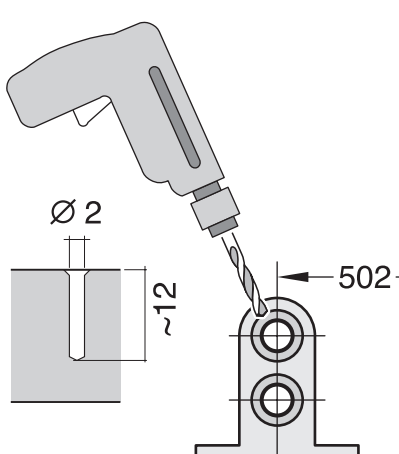

10

[illegible][illegible]

1



2b

600
(max. 608)

3a

3b

6

3a

3b

3a

3b

2b 4



4

verspannen
brace
calar verticalement
Enrasar

0 - 60 mm

SW 13

SW 10

Diagram illustrating the removal of the front cover. The cover is shown with dimensions: max. 150, max. 125, and 594. A detail view shows the cover being lifted away from the unit, with a screwdriver used to remove a screw (10) and the cover being lifted (11).

9

Diagram 9 illustrates the mounting of the door handle. It shows three steps: 1. Preparing the handle with screws. 2. Aligning the handle with the door edge. 3. Tightening the screws. A warning symbol (exclamation mark in a triangle) is present near the screws. A dimension 'X' is indicated for the handle width.

9



Scheibe entfernen
remove disc
enlever le disque
Eliminar Disco

max. Ø 18 mm

max. 10 Nm

max. 1 min.
min. 250 mm

Ø 38 mm

GB

9

26.4 mm
(G 3/4")
20.9 mm
(G 1/2")

min. 10 mm

0.05 - 1 MPa
(0.5 - 10 bar)
max. 60°C

F = 125

30

Dichtheit nach einem Spülgang prüfen.
Check for leaks after one wash cycle.
Vérifiez l'étanchéité après un lavage.
Verificar la estanqueidad tras un ciclo de lavado.

11



max. 4 m

2 m

0.22 mm

2.2 m

*) Mat.-Nr. 0305054

5 m

EU *) Mat.-Nr. 12022522