

1

1 2 3 4 5 6 7

1.75 m

click

815-875

575

600 (max. 606)

100-50 mm


2a

2b

*) Mat.-Nr. 006224564

2b **4**

*) Mat.-Nr. 006224564

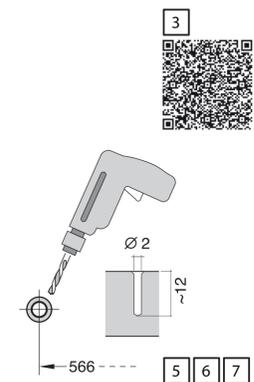

3

nicht einklemmen
do not pinch
ne pas coincer
No doblar

4

verspannen
brace
calar verticalment
Enrasar

0-60 mm

SW 13

SW 10

5

max. 725

594

11

6

14

Torx T 20

12

13

12

7

15

16

17

18

19

20

21

22

23

24

max. 1.2 mm

2.5 - 8.5 kg

1

4

5A

6A

7A



8

11

5A

6A

7A



8

8 9

9

9

24

9

10

c =	d =
650 mm	≥ 30 mm
660 mm	≥ 20 mm
670 mm	≥ 10 mm
680 - 725 mm	≥ 0 mm

max. 60 mm

*) Mat.-Nr. 00612653

*) Mat.-Nr. 00612653

11

Scheibe entfernen
remove disc
enlever le disque
Eliminar disco

min. 2 18 mm

max. 10 Nm

Dichtheit nach einem Spülgang prüfen.
Check for leaks after one wash cycle.
Vérifiez l'étanchéité après un lavage.
Verificar la estanqueidad tras un ciclo de lavado.

10 l/min

0.05 - 1 MPa
(0.5 - 10 bar)
max. 60 °C

11

max. 4 m

2 m

2.2 m

*) Mat.-Nr. 00350564

5 m

EU *) Mat.-Nr. 12022522

