




566

GV 64x Voll-I - SK - 81,5 cm - GS 9001 999 530 (0503)

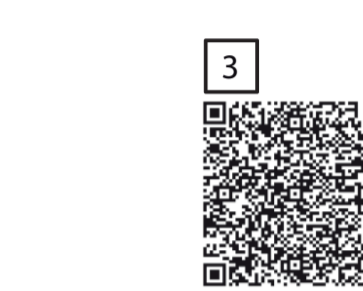

6b Montageanleitung über den Kundendienst erhältlich
 1) über den Kundendienst erhältlich
 1) Installationsanvisningar går att beställa via service
 1) Installasjonsveiledning fås hos kundeservice
 1) Asennusohjeet saatavissa huoltopalvelusta
 1) Installationsvejledning fås hos kundeservice

1

2a

2b

*) Mat-Nr. 622456

3

4

5

6

7

8

9

9

9

10

c =	d =
650 mm	ln 30 mm
660 mm	ln 20 mm
670 mm	ln 10 mm
680 - 725 mm	ln 0 mm

max. 60 mm

11

Scheibe entfernen
Fjern skive
Avlägsna skiva
Fjern skiven
Poista levy

min. Ø 18 mm

max. 10 Nm

10 l/min

26

27

28

29

Dichtheit nach einem Spülgang prüfen
Kontrollera tæthet efter en skylning
Kontrollera tæthet efter en diskning
Kontrolli tiiviyden etään vasku- ja pesu-ohjelmien jälkeen

GB

11

max. 4 m

2 m

Ø 22 mm

2.2 m






Mat.-Nr. 00350564











5 m

EU *) Mat.-Nr. 12022522

11

*) Mat.-Nr. 00657927

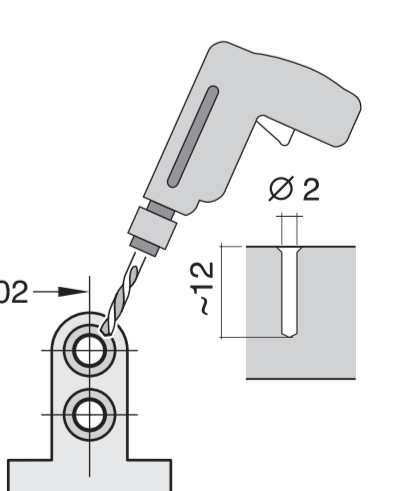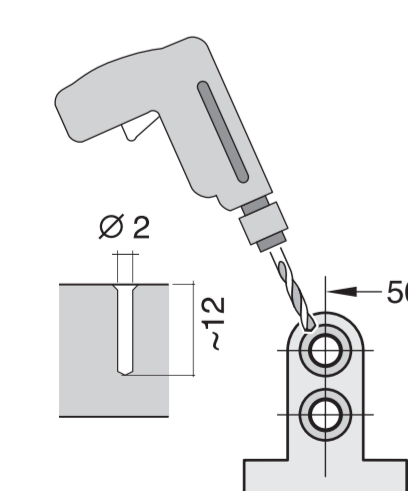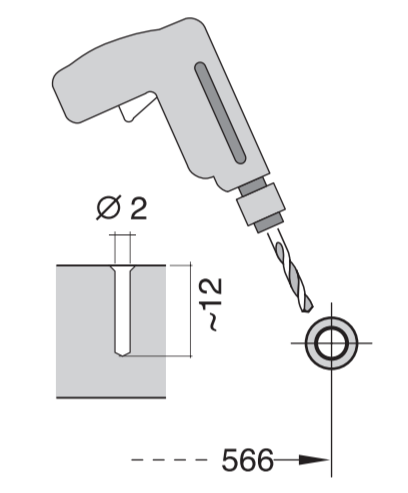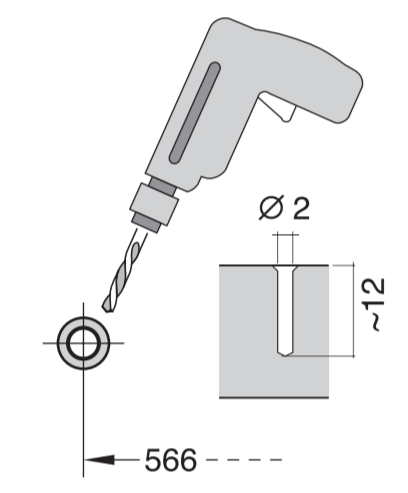

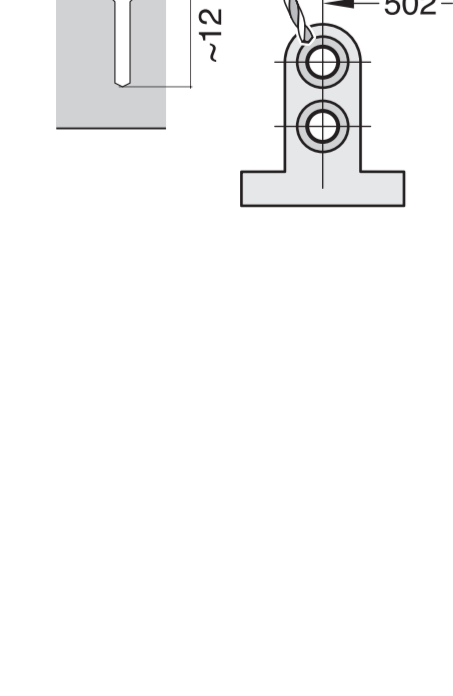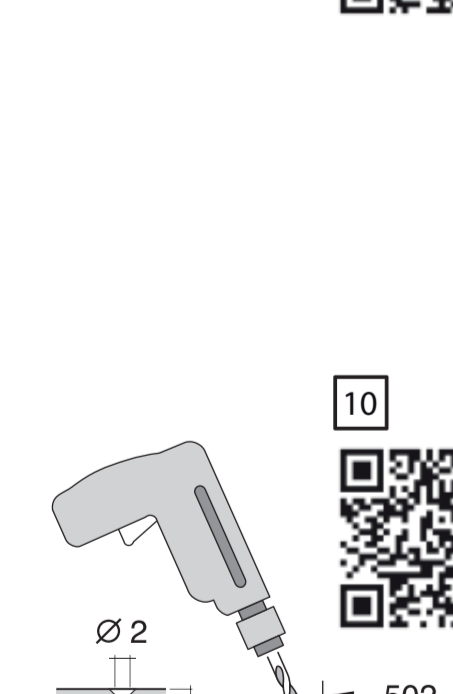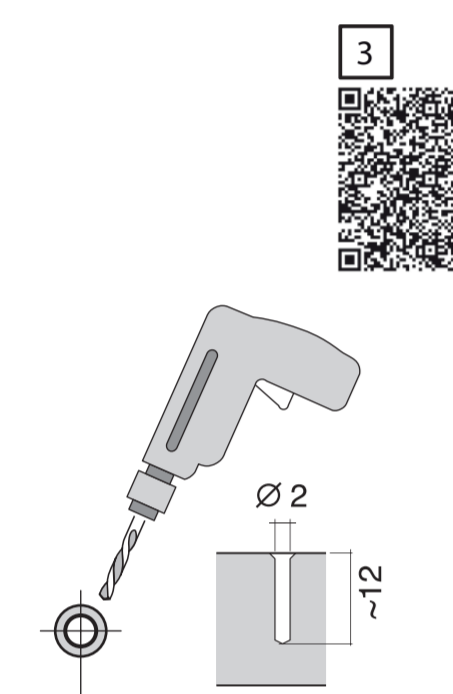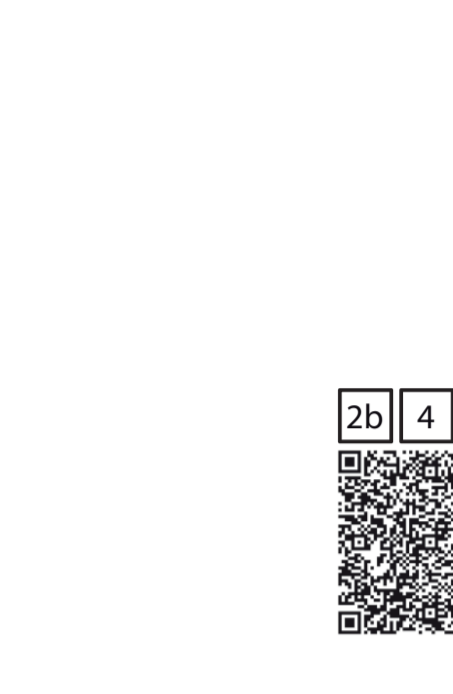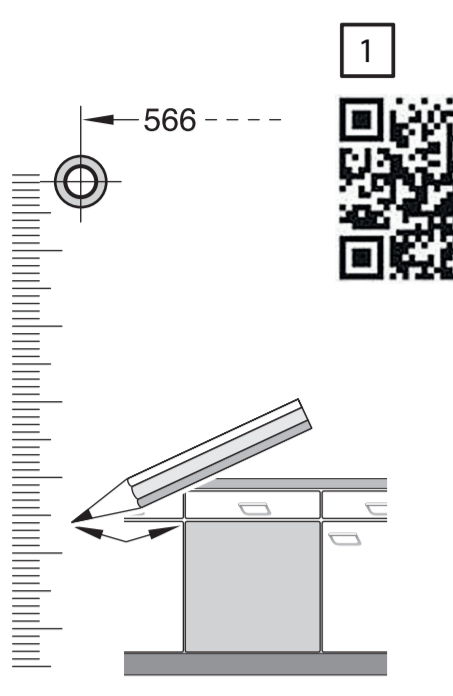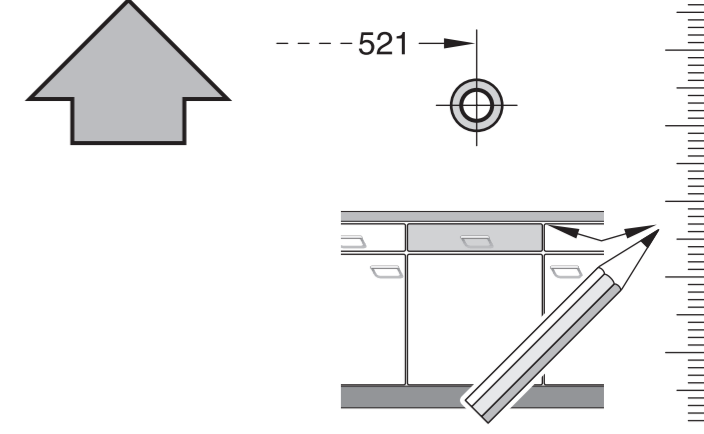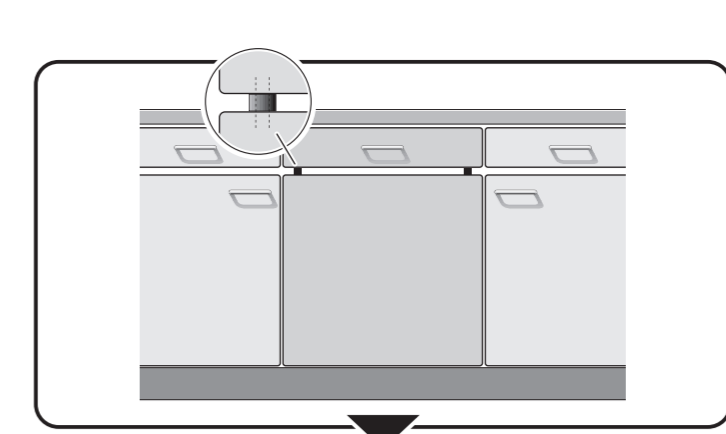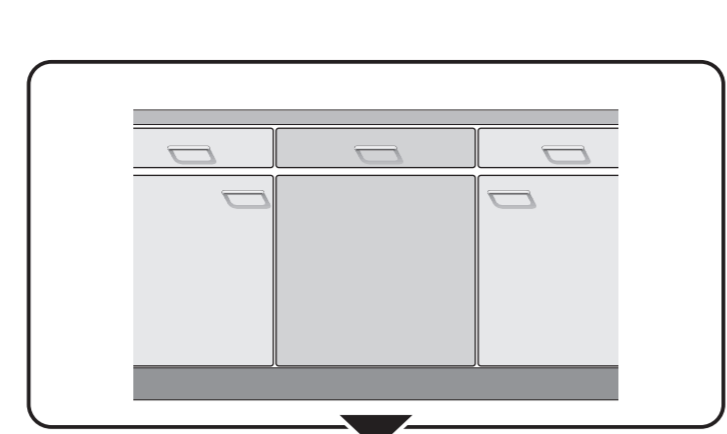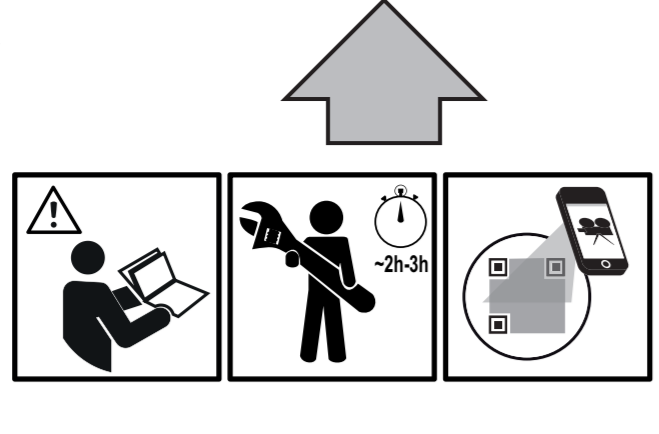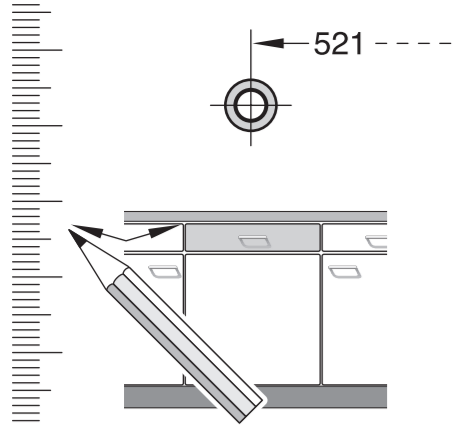

1

2a

2b

Mat-Nr. 622456

3

4

5

6

7

2.5 - 8.5 kg

8

9

10

11

1
4
5A

5A

6A

7A

8 >>>> 11

