DWHD440MFM EMERALD® 4-PROGRAM DISHWASHER

MASTERPIECE® SERIES HANDLE













Also Available In:

DWHD440MFP - Flat Stainless Steel Panel with Professional Series Handle DWHD440MPR - Custom Panel

FEATURES & BENEFITS

- Sens-A-Wash® measures water cleanliness and adjusts wash cycle
- Three stage advanced filtration recirculates water for sparkling results
- Accommodates 15 plate settings for your dinner parties
- Extra Dry Option ensures perfectly dry dishes and sanitizes 99.9% of bacteria
- Impressively Quiet®-48 dBA for peaceful kitchen experience

ACCESSORIES (OPTIONAL)	
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC











Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

Fine Silverware Carafe

GENERAL PROPERTIES	
Number Of Wash Cycles	4
Number Of Options	4
dBA	48
Third Rack	N/A
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Buttons
Concealed Heating Element	Yes
Leak Protection System	24/7 AquaStop® Plus
Water Softener	No
Five-Level Wash	Yes
Childlock	No
EFFICIENCY	
Water Usage Per Cycle (g)	2.9 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Qualified	Yes
Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	624 g
CAPACITY	
Number Of Place Settings	15
TECHNICAL DETAILS	
\\\\a++a \\\\\\	4 440 144
Watts (W)	1,440 W
Current (A)	1,440 W
Current (A)	12 A
Current (A) Volts (V)	12 A 120 V
Current (A) Volts (V) Frequency (Hz)	12 A 120 V 60 Hz
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in)	12 A 120 V 60 Hz 43 1/2"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin)	12 A 120 V 60 Hz 43 1/2"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake	12 A 120 V 60 Hz 43 1/2" 14 140° F
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in)	12 A 120 V 60 Hz 43 1/2" 14 140° F
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" ×
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in)	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" × 23 3/4"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (H*xWxD) (in)	12 A 120 V 60 Hz 43 1/2" 14 140° F 67 " 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" × 23 5/8" × 24"
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (H*xWxD) (in) Adjustable Feet	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" × 23 5/8" × 24" Yes
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (H*xWxD) (in) Adjustable Feet Net Weight (lbs)	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" × 23 5/8" × 24" Yes
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (H*xWxD) (in) Adjustable Feet Net Weight (lbs) WARRANTY Limited Warranty, Entire Appliance, Parts	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" × 23 5/8" × 24" Yes 85 lbs
Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (H*xWxD) (in) Adjustable Feet Net Weight (lbs) WARRANTY Limited Warranty, Entire Appliance, Parts and Labor Limited Warranty for Microprocessor or Printed	12 A 120 V 60 Hz 43 1/2" 14 140° F 67" 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" × 23 5/8" × 24" Yes 85 lbs 2 Year

^{*}minimum height requirement


Page 1 of 2 11 / 17

DWHD440MFM EMERALD® 4-PROGRAM DISHWASHER



MASTERPIECE® SERIES HANDLE

DISHWASHER & CUTOUT DIMENSIONS

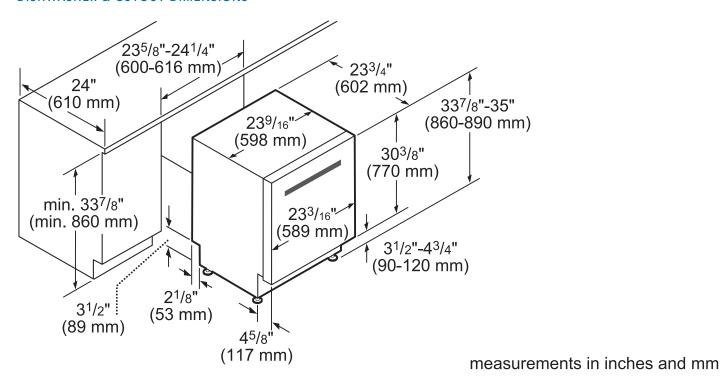

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

18007354328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 2 of 2 11 / 17