PRD48JDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE



PROFESSIONAL SERIES, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE



FEATURES & BENEFITS

- ★ The only professional range on the market with a built-in steam oven and warming drawer
- ★ 27 Easy Cook[®] food programs. Pre-programmed modes automatically set the oven temperature and humidity to ensure perfect cooking results
- ★ Patented Pedestal Star[®] Burner with QuickClean Base[®] designed for easy surface cleaning and superior heat spread for any size pan
- ★ Powerful 22,000 BTU (NG) burner (front right)
- ★ Precision simmering capabilities as low as 100°F (375 BTU) with 4 ExtraLow[®] Simmer burners

TECHNICAL DETAILS

| Circuit Breaker (A) | 50 A |
|------------------------|-------------------------------|
| Volts (V) | 240 / 208 V |
| Frequency (Hz) | 60 Hz |
| Plug Туре | No Plug |
| Power Cord Length (in) | Purchase Separately |
| Energy Source | Gas and Electric |
| Gas Type | Natural Gas 15 mbar (USA) |
| Alternative Gas Type | Liquid Gas 27.5 mbar (USA) |

SEE PAGE 2 FOR OPTIONAL ACCESSORIES

| GENERAL PROPERTIES | |
|--|--|
| Oven Capacity | 5.1 / 1.4 cu. ft. |
| Cooking Modes - Main / Large Cavity | |
| Bake, Convection Bake, Broil, Convection Broil, Self clean, Keep Warm | Roast, Convection Roas |
| Cooking Modes - Small Cavity | |
| Steam, True Convection, Steam/Convection, Re Defrost, Easy Cook® | heat, Proof, Slow Cook, |
| Additional Features | |
| Meat Probe, Sabbath Function, Cook Timer, Kit | chen Timer |
| Cleaning Type | Self Clean (Primary) |
| Type of Grate | Continuous Cast Iror |
| Controls | Metal Knobs and LC Display |
| Warming Drawer | 1.1 cu. ft Low, Mea High |
| Sealed Burners | Yes |
| OVEN PERFORMANCE | |
| Bake Power | 2,000 W (Lg) / 1,960 W (Sm) |
| Broil Power | 4,000 W (Lg) |
| Convection Power | 2,750 W (Lg) |
| BURNER PERFORMANCE | |
| Total Number of Cooktop Burners | 6 + Griddle |
| Power of Front Left Burner BTU | 18,000 and XLO (NO |
| Power of Back Left Burner BTU | 18,000 and XLO (NO |
| Power of Back Center Burner BTU | 18,000 (NG) |
| Power of Front Center Burner BTU | 18,000 (NG) |
| Power of Center 12" Electric Griddle (W) | 1,630 W |
| Power of Center 12" Electric Grill (W) | N/A |
| Power of Far Right 12" Electric Griddle (W) | N/A |
| Power of Back Right Burner BTU | 18,000 and XLO (NO |
| Power of Front Right Burner BTU | 22,000 and XLO (NO |
| DIMENSIONS & WEIGHT | |
| Overall Appliance Dimensions (HxWxD) (in) | 35 7/8"–36 3/4" × 47 15/16" × 28 3/4" |
| Required Cutout Size (HxWxD) (in) | 35 7/8 "–36 3/4 " × 48 24"–25 1/8 " |
| Adjustable Range Height (in.) | 7/8" |
| Net Weight (lbs) | 530 lbs |
| Net Weight (103) | and the second |
| WARRANTY | |

SEE PAGE 2 FOR INCLUDED ACCESSORIES

PRD48JDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE



PROFESSIONAL SERIES, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE

ACCESSORIES (INCLUDED)

1 X Nozzle Set for Liquid Gas, 3 X Telescopic Rack, 2 X Temperature Sensor, 1 X Island Trim, 1 X STS Tray-GN1/3-Punched-40 mm Deep, 1 X STS Tray-GN1/3-Unpunched-40 mm Deep, 1 X STS Tray-GN2/3-Unpunched-40 mm Deep, 1 X STS Tray-GN2/3-Punched-40 mm Deep, 1 X STS Tray-GN2/3-Unpunched-28 mm Deep, 1 X Grid, 1 X Grill Plate, 1 X Broiler Pan Small, 1 X Broiler Pan

PAGRIDDLE

PWOKRINGHC

PAKNOBLUNG

Griddle

Wok Ring

ACCESSORIES (OPTIONAL)



PA12GRILLN Pro Grill



PA12CHPBLK 12" Cutting Board



PA48JTKG Toekick



CS1XLPH Perforated Cooking Pan-Half Size (1 5/8" Deep)



Cooking Pan-Half Size





CS2XLPH Perforated Cooking Pan-Full Size (1 5/8" Deep)

Blue Knob Pro Grand Kit



PA12CVRJ 12" Pro Griddle Cover



PA48JLBSG 9" Low Backguard







Cooking Pan– Full Size



48-INCH RANGE DIMENSIONS


CS1XLH

CS2LH **Baking Tray**

47¹⁵/16" (1219 mm) 35⁷/8"-36³/4" (911-29" 933 mm) (737 mm) B 31³/8" (797 mm) ନ 28³/4" (730 mm) 24⁵/8" (625 mm)48³/4" (1238 mm) measurements in inches and mm


PRD48JDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH STEAM AND GRIDDLE PROFESSIONAL SERIES, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE

48-INCH RANGE CUTOUT DIMENSIONS

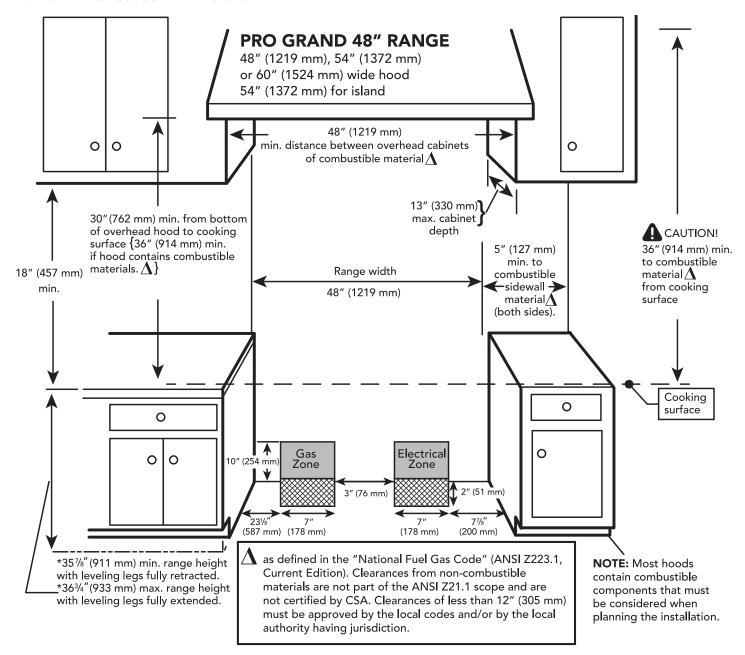



Page 4 of 5

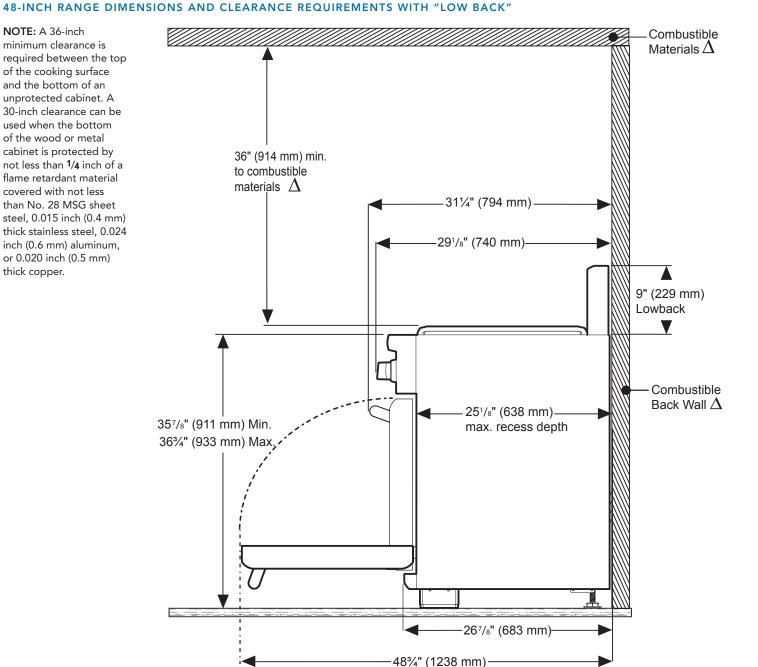

 Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

TROLESSIONAL SERIES, COMMERCIAL-DELTIT, FORCELAIN COORTOF SON ACE






PRD48JDSGU 48-INCH DUAL-FUEL PRO GRAND® RANGE WITH **STEAM AND GRIDDLE**



PROFESSIONAL SERIES, COMMERCIAL-DEPTH, PORCELAIN COOKTOP SURFACE

48-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

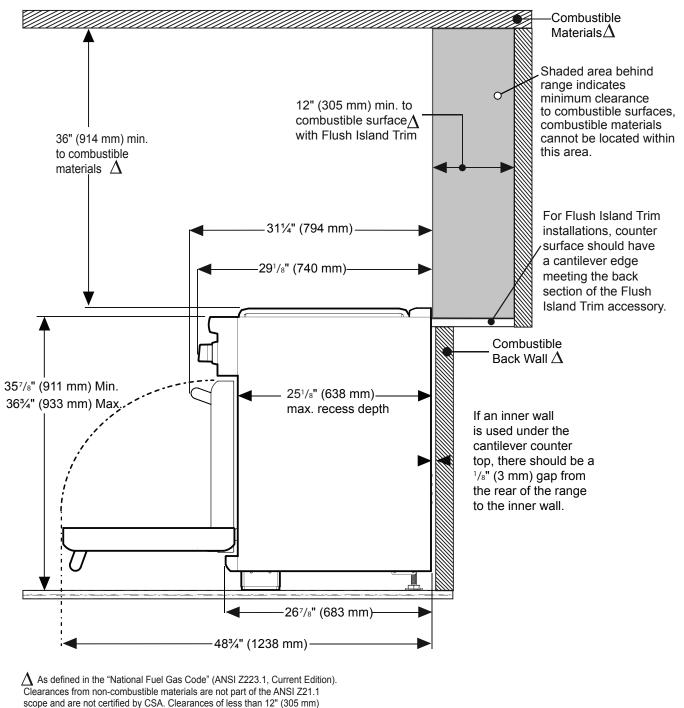

must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada Thermador is not responsible for products that are transported from the U.S. for use in Canada

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.