GAGGENAU



Inline blower
AR 400

AR 400 742
Metal housing.
Air extraction.
HVI CFM: 390, High Speed.
Inside installation.

HVI Performance Values (CFM & SONES)

Inline blower

Exhaust Discharge: horizontal
Speed: High Speed
Static Pressure (in H_2O): 0.2"
HVI Watts: 106
CFM/Watt: 3.79
HVI CFM: 390
Sones (Reportable): NA


Highlights
- Powerful blower to combine with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island hood.
- Quiet blower with high-efficiency BLDC technology.

Output
Sound power and sound pressure depending on built-in situation.
Power levels depend on the ventilation system.

Features
Blower technology with highly efficient,brushless DC motor (BLDC).
Steel housing, zinc-plated.
Duct connection pieces on air intake side: 1x ø 6" round, 4x ø 6" round.
Duct connection piece on output side: 1x ø 6" round.
Spare cover for closing an air intake is included.
Retaining bracket included for top or side installation.

Planning notes
AR 400 742 inline blower can only be combined with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island hood.
Connection to the respective appliances via network cable.
Appliance weight: approx. 27.6 lb.

Rating
Total rating: 210 W.
Total amps: 3.
120 V / 60 Hz.
Connecting cable not included.
Hard wire required.
16' network cable included.

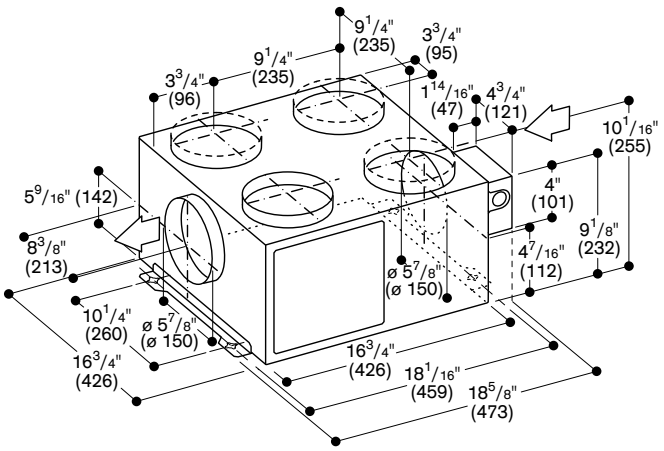

5x ⌀ 6" (⌀ 150)
2 connecting pieces included

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.