GAGGENAU



Remote blower
AR 401

AR 401 742
Stainless steel.
Air extraction.
HVI CFM: 620, High Speed.
Outside wall installation.

Installation accessories

AD 702 052
ø 8″ Telescopic wall-duct.

HVI Performance Values (CFM & SONES)

Remote blower

Exhaust Discharge: horizontal
Speed: Low Speed
Static Pressure (in H_2O): 0.03″
HVI Watts: 21
CFM/Watt: 15.81
HVI CFM: 320
Sones (Reportable): NA

Remote blower

Exhaust Discharge: horizontal
Speed: High Speed
Static Pressure (in H_2O): 0.03″
HVI Watts: 104
CFM/Watt: 6.00
HVI CFM: 620
Sones (Reportable): NA


Highlights
- Powerful remote blower for combination with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island hood.
- Quiet blower with high-efficiency BLDC technology.

Output
Sound power and sound pressure depending on built-in situation.
Power levels depend on the ventilation system.


Features
Blower technology with highly efficient, brushless DC motor (BLDC).
Includes sound insulation to minimize the noise level.
Stainless steel housing.
Duct connection pieces on air intake side: 1x ø 8″ round.
Retaining bracket for installation on an outside wall is included.

Planning notes
This blower can only be combined with 400 series ventilation systems such as AL 400 retractable downdraft, VL 414 downdraft and AW/AI 442 professional wall/island hood.
Connection to the respective appliances via network cable.
Installation on the outside wall allows for a reduced noise level in the kitchen.
Although the blower is installed on an outside wall, the electronic control box must be installed indoors.
Acceptable temperature range for installation of the electronic control box: -13 to 140 °F.
Distance from ground (or other object) to the center of the duct: min. 23 5/8″.
Appliance weight: approx. 29.7 lb.

Rating
Total rating: 170 W.
Total amps: 3.
120 V / 60 Hz.
Connecting cable 68 7/8″ with plug.
16′ network cable included.

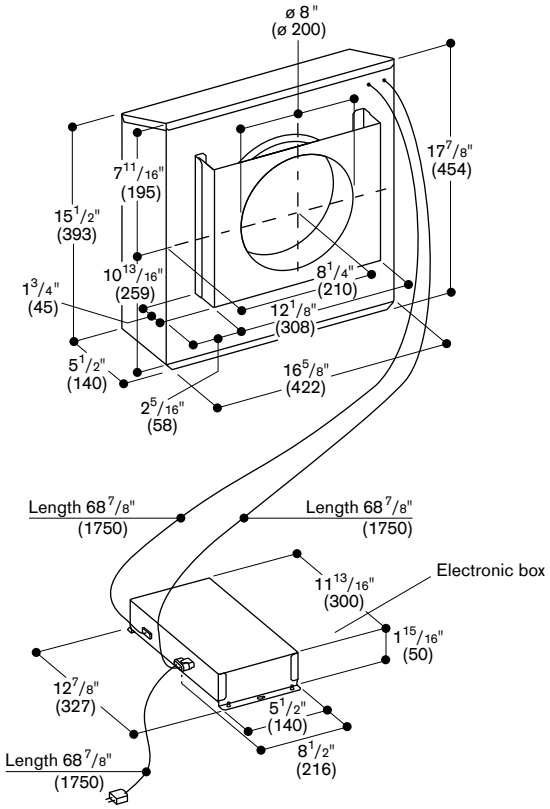

Telescopic wall-duct AD 702 052

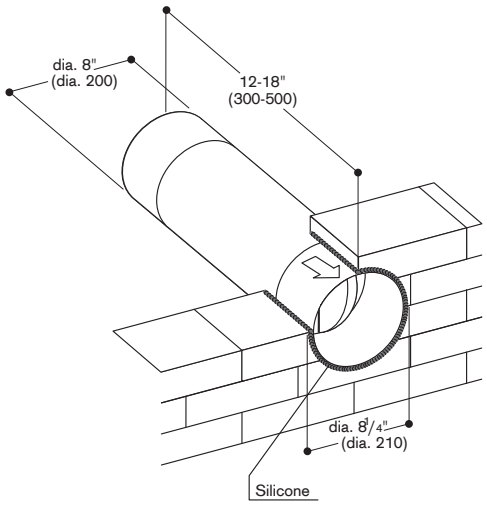

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.