DWHD771WFP GLASS CARE CENTER 7 PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE





Also Available In:

DWHD771WFM – Flat Stainless Steel Panel with Masterpiece® Series Handle

DWHD771WPR – Custom Panel

FEATURES & BENEFITS

- ★ Revolutionary lower rack designed specifically to accommodate all of your glassware. With a tine-less configuration to maximize capacity for wine glasses, cocktail glasses and more, it offers peace of mind while you wash even the most delicate items
- ★ Peace of mind with our no-slip, soft rubber racks holding your most delicate glassware during the wash and dry cycle
- ★ Star Speed[®] is a full wash cycle in just 20 minutes industry's fastest hot water wash
 - Push to Open dishwasher opens with either a push or pull, so loading is easier, even when your hands are full
- ★ Large Glassware Capacity allows you to wash up to twentysix 12 oz wine glasses — or even more smaller ones — at once, while customizable enough to handle all types of glassware
- ★ Mixed Use Top Rack Wash all of your other dishware while providing an all new cutlery caddy to clean your entertaining tools
 - Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)		
Dishwasher Supply and Drainage Hose Extension 76 3/4 "	SGZ1010UC	
Dishwasher Accessory Kit	SMZ5000	
Fine Silverware Carafe	SMZ5002UC	
Junction Box	SMZPCJB1UC	





Silverware

Fine

Carafe

Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

THERMADOR® EXCLUSIVE

GENERAL PROPERTIES		
Number Of Wash Cycles	7	
Number Of Options	7	
NSF®-Certified* Sanitize Option	Yes	
dBA	44	
Third Rack	N/A	
Rack Adjustability	Rackmatic 3-Stage	
Tub Material	Stainless Steel	
Control Type	Premium Touch Contro	
Concealed Water Heating Element	Yes	
Leak Protection System	24/7 AquaStop®	
Water Softener	Yes	
Five-Level Wash	Yes	
Childlock	No	
Home Connect (Wi-Fi Enabled)	Yes	
EFFICIENCY		
Water Usage Per Cycle (g)	3.5 g	
Energy Efficiency Class	Tier 1	
ENERGY STAR [®] Certified	Yes	
Total Annual Energy Consumption (kWh)	269 kWh	
Total Annual Water Consumption (g)	623.5 g	
	020.0 g	
CAPACITY	020.0 g	
	8	
CAPACITY		
CAPACITY Number Of Place Settings		
CAPACITY Number Of Place Settings TECHNICAL DETAILS	8	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W)	8 1440 W	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A)	8 1440 W 12 A	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	8 1440 W 12 A 120 V	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz)	8 1440 W 12 A 120 V 60 Hz	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45"	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)**	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56"	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (lb/sin)	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (lb/sin) Max. Temperature for Water Intake	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45 " Right - 56 " 14 140° F	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in)	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14 140° F N/A	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in)	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14 140° F N/A	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14 140° F N/A 79" 33 7/8 " × 23 9/16 " ×	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in)	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14 140° F N/A 79" 33 7/8" × 23 9/16" × 23 3/4" 33 7/8" Min. × 23 5/8"	
CAPACITY Number Of Place Settings TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in) Power Cord Install Length from Corner of Unit when Facing the Door (in)** Minimum Water Pressure (Ib/sin) Max. Temperature for Water Intake Length Inlet Hose (in) Length Outlet Hose (in) DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in)	8 1440 W 12 A 120 V 60 Hz 67 " Left - 45" Right - 56" 14 140° F N/A 79" 33 7/8" x 23 9/16" x 23 3/4" 33 7/8" Min. x 23 5/8"	


**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit #SMZEPCC1UC.

DWHD771WFP GLASS CARE CENTER 7 PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE



WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

DISHWASHER & CUTOUT DIMENSIONS

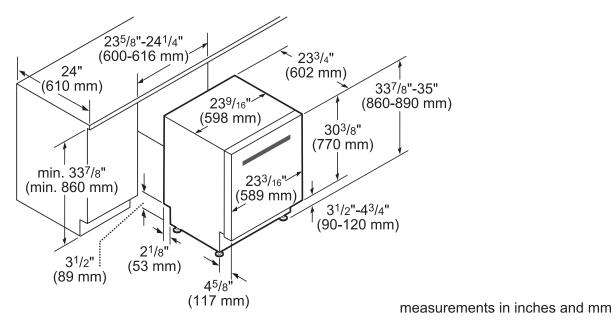

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.