

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR



### ALSO AVAILABLE:

MED301RWS - Right Side Opening Door

#### **FEATURES & BENEFITS**

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility-standard or flush installation into kitchen cabinets
- Ergonomically designed side opening door for better access to oven cavity
- Commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry
- Fast 2-hour self clean mode



#### **GENERAL PROPERTIES**

#### **Heating Modes**

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Conduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Denyarate, Speed Convection, Slow Roast,			
Telescopic Rack(s)3Illumination TypeHalogenInterior Lights2Home Connect® (Wi-Fi Enabled)YesOVEN PERFORMANCEBake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Sabbath	Yes		
Illumination TypeHalogenInterior Lights2Home Connect® (Wi-Fi Enabled)YesOVEN PERFORMANCEBake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Cleaning Type	Self Clean / Easy Clean		
Interior Lights2Home Connect® (Wi-Fi Enabled)YesOVEN PERFORMANCEBake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" - 9/16" - 0"Required Cutout Size (HxWxD) - Standard27" - 28 5/8" x 28 1/2"	Telescopic Rack(s)	3		
Home Connect® (Wi-Fi Enabled)YesOVEN PERFORMANCEBake ElementBake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Illumination Type	Halogen		
OVEN PERFORMANCEBake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Interior Lights	2		
Bake Element2,400 WBroil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Home Connect <sup>®</sup> (Wi-Fi Enabled)	Yes		
Broil Element3,800 W / 1,000 WConvection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	OVEN PERFORMANCE			
Convection Element2,000 WTECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Bake Element	2,400 W		
TECHNICAL DETAILSWatts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Broil Element	3,800 W / 1,000 W		
Watts6,400 WCircuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Convection Element	2,000 W		
Circuit Breaker30 AVolts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHT0verall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	TECHNICAL DETAILS			
Volts240 / 208 VFrequency60 HzPlug TypeFixed Connection, No PluConduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Watts	6,400 W		
Frequency 60 Hz   Plug Type Fixed Connection, No Plu   Conduit 60" 4-Wire   Energy Source Electric   DIMENSIONS & WEIGHT 0verall Appliance Dimensions (HxWxD)   Overall Appliance Dimensions (HxWxD) 29" x 29 3/4" x 24 1/2"   Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0"   Required Cutout Size (HxWxD) – Standard 27" – 28 5/8" x 28 1/2"	Circuit Breaker	30 A		
Plug Type Fixed Connection, No Plu   Conduit 60" 4-Wire   Energy Source Electric   DIMENSIONS & WEIGHT 0verall Appliance Dimensions (HxWxD) 29" x 29 3/4" x 24 1/2"   Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0"   Required Cutout Size (HxWxD) – Standard 27" – 28 5/8" x 28 1/2"	Volts	240 / 208 V		
Conduit60" 4-WireEnergy SourceElectricDIMENSIONS & WEIGHTOverall Appliance Dimensions (HxWxD)29" x 29 3/4" x 24 1/2"Trim Overlaps (Top – Sides – Bottom)3/8" to 2" – 9/16" – 0"Required Cutout Size (HxWxD) – Standard27" – 28 5/8" x 28 1/2"	Frequency	60 Hz		
Energy Source Electric   DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) 29" x 29 3/4" x 24 1/2"   Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0"   Required Cutout Size (HxWxD) – Standard 27" – 28 5/8" x 28 1/2"	Plug Туре	Fixed Connection, No Plug		
DIMENSIONS & WEIGHT   Overall Appliance Dimensions (HxWxD) 29" x 29 3/4" x 24 1/2"   Trim Overlaps (Top – Sides – Bottom) 3/8" to 2" – 9/16" – 0"   Required Cutout Size (HxWxD) – Standard 27" – 28 5/8" x 28 1/2"	Conduit	60" 4-Wire		
Overall Appliance Dimensions (HxWxD)   29" x 29 3/4" x 24 1/2"     Trim Overlaps (Top – Sides – Bottom)   3/8" to 2" - 9/16" - 0"     Required Cutout Size (HxWxD) – Standard   27" - 28 5/8" x 28 1/2"	Energy Source	Electric		
Trim Overlaps (Top – Sides – Bottom)   3/8" to 2" – 9/16" – 0"     Required Cutout Size (HxWxD) – Standard   27" – 28 5/8" x 28 1/2"	DIMENSIONS & WEIGHT			
Required Cutout Size (HxWxD) – Standard 27" – 28 5/8" x 28 1/2"	Overall Appliance Dimensions (HxWxD)	29" x 29 <b>3/4</b> " x 24 <b>1/2</b> "		
	Trim Overlaps (Top – Sides – Bottom)	<b>3/8</b> " to 2" - <b>9/16</b> " - 0"		
x 23 1/2"	Required Cutout Size (HxWxD) – Standard	x 23 1/2"		
Required Cutout Size (HxWxD) – Flush 29 1/8" x 30 3/4" x 24 1/2"	Required Cutout Size (HxWxD) – Flush	29 1/8" × 30 3/4" × 24 1/2"		
Oven Cavity Size 4.5 cu. ft.	Oven Cavity Size	4.5 cu. ft.		
Overall Oven Interior Dimensions (HxWxD) 17 3/4" x 24" x 17 7/8"	Overall Oven Interior Dimensions (HxWxD)	17 <b>3/4</b> " × 24" × 17 <b>7/8</b> "		
Usable Oven Interior Dimensions (HxWxD) 13 1/2" x 21 5/8" x 16 1/4"	Usable Oven Interior Dimensions (HxWxD)	13 <b>1/2</b> " x 21 <b>5/8</b> " x 16 <b>1/4</b> "		
Net Weight 188 lbs	Net Weight	188 lbs		
ACCESSORIES (INCLUDED)	ACCESSORIES (INCLUDED)			
	3 Telescopic Racks, Multi-point Meat Probe,	Rotisserie		
3 Telescopic Racks, Multi-point Meat Probe, Rotisserie				

2 Year


Limited Warranty Parts and Labor


†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR



#### **INSTALLATION DETAILS**

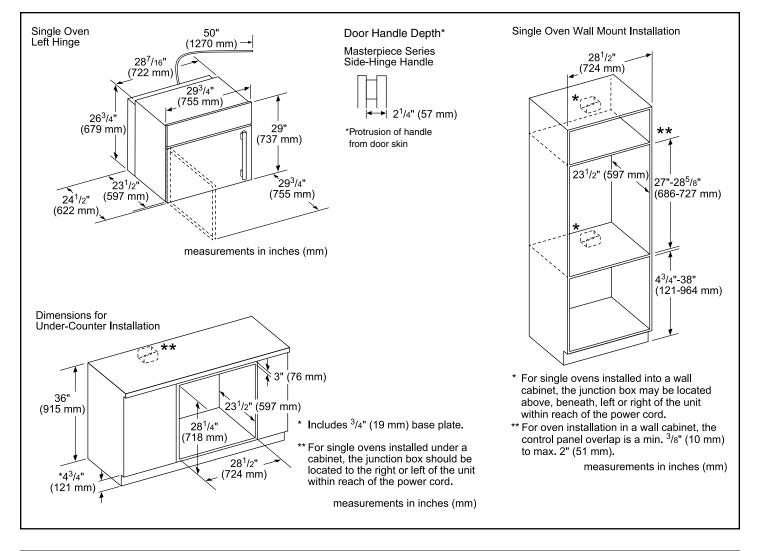


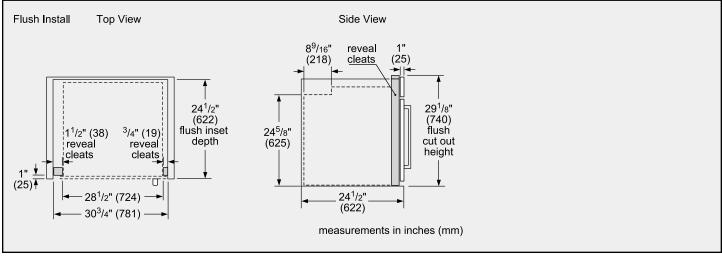

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR




#### INSTALLATION DETAILS

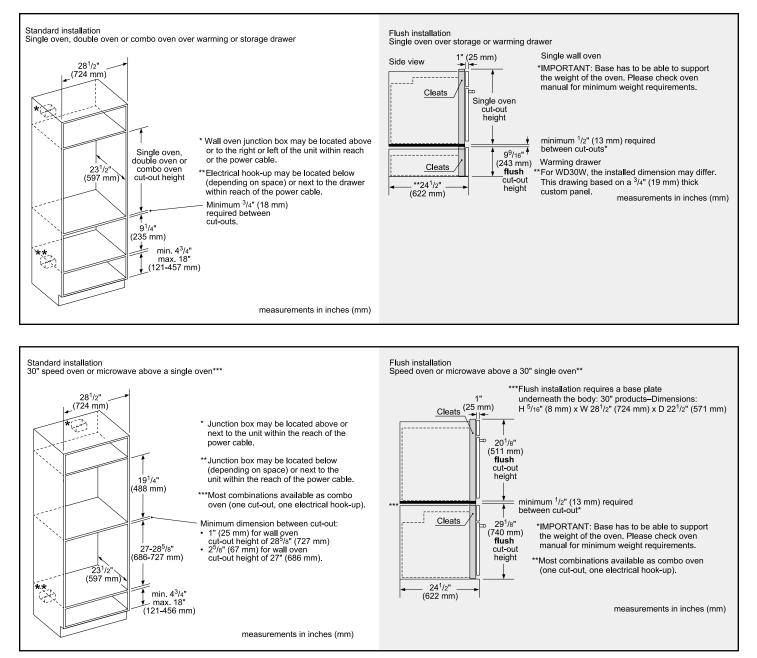

MASTERPIECE® COLLECTION, LEFT SIDE OPENING DOOR



#### INSTALLATION DETAILS

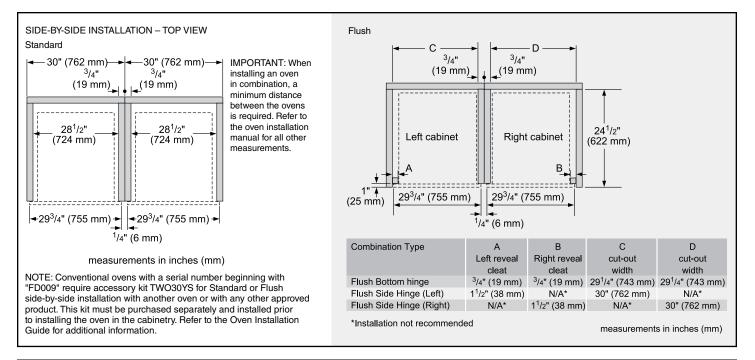

### THERMADOR SIDE-BY-SIDE BUILT-IN OVEN COMBINATION GUIDE

The following **OVENS** are approved to be installed side-by-side in combination and the installation has been certified by CSA. This guide is only effective with the use of the Thermador built-in oven side-by-side accessory kit TWO30YS. The built-in oven side-by-side accessory kit is required for approved installation. The following **OVENS** and **DRAWERS** are approved by BSH Home Appliances Corporation to be installed in combination. These products, identified in the table below, may be installed in combination with other cooking units. The suitability of the combination has not been evaluated by CSA.

BUILT-IN OVENS		BUILT-IN OVENS				
Conventional Ovens*	Steam Ovens	Conventional Ovens*	Steam Ovens	Microwave Ovens	Speed Ovens	
ME301WS	MEDS301WS	ME301WS	MEDS301WS	MB30WS	MC30WS	
MED301WS	PODS301WS	MED301WS	PODS301WS	MB30WP	MC30WP	
MED301LWS	MEDS301WS w/ SDS30WC				MC20MC	
MED301RWS	PODS301WS w/ SDS30WC	MED301LWS	MEDS301WS w/ SDS30WC	MB30WS w/ SD30WC	MC30WS w/ SD30WC	
PO301W		MED301RWS	PODS301WS	MB30WP	MC30WP	
POD301W			w/ SDS30WC	w/ SD30WC	w/ SD30WC	
POD301LW		PO301W		MB30WS w/ WD30WC	MC30WS w/ WD30WC	
POD301RW		POD301W		MB30WP	MC30WP	
<b>(b</b> )				w/WD30WC	w/WD30WC	
		POD301LW				
		POD301RW				

\*Conventional ovens with a serial number beginning with "FD009" require accessory kit TWO30YS for side-by-side installation with another oven or in combination with any other approved product. All parts in the kit may not be required. Refer to the Oven Installation Guide for additional information.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.