GAGGENAU



Recirculation blower
AR 410

AR 410 710
Metal housing
Air recirculation
HVI CFM: 600, High Speed
Works with AL 400 retractable downdraft and VL 414/VL 200 downdraft.
Installation in the cabinet.

Installation accessories and planning guides can be found on the following pages:
For AL 400 722, see page 140.
For VL 200 120, see page 148.
For VL 414 712, see page 154.

Optional accessories

AA 010 410
Air exhaust grill for air recirculation mode.
Stainless steel-colored, 36″, includeds installation fittings, height adjustable.

Part No. 11028160
2 regenerable activated charcoal filters with highly efficient odor reduction.
Extended change interval of the activated charcoal filter: regenerable up to 30 times.
Regenerable in the oven at 400 °F (200 °C).
For air recirculation.

HVI Performance Values (CFM & SONES)

Remote blower
Exhaust Discharge: direct
Speed: High Speed
Static Pressure (in H_2O): 0.03″
HVI Watts: 254
CFM/Watt: 2.38
HVI CFM: 600
Sones (Reportable): NA

Remote blower
Exhaust Discharge: direct
Speed: Low Speed
Static Pressure (in H_2O): 0.03″
HVI Watts: 113
CFM/Watt: 3.92
HVI CFM: 440
Sones (Reportable): NA


Highlights
- Powerful recirculation blower to combine with 400/200 series Vario downdraft and 400 series AL 400 retractable downdraft ventilation.
- Efficient BLDC technology.
- Particularly quiet due to patented noise insulation.
- Compact, space-saving installation.

Output
Sound power and sound pressure depending on built-in situation.
Power levels depend on the ventilation system.


Features
Fan technology with highly efficient, brushless DC motor (BLDC).
Includes sound insulation to minimize the noise level.
Steel housing, zinc-plated.
Pipe connection piece on intake side: 1 x DN150 flat duct.
Retaining bracket for installation in cabinet base included.
2 regenerable activated charcoal filters included. Regenerable in the oven at 400 °F.
Highly efficient odor reduction for cooking applications with complex odor molecules (e.g. fish and seafood).
The filter retains an extremely high amount of airborne pollen and deactivates allergens, which are retained by the filter.
Extended change interval of the activated charcoal filter: regenerable up to 30 times.

Planning notes
Powerful recirculation blower to combine with VL 414/VL 200 Vario downdraft ventilation and AL 400 722 retractable downdraft ventilation.
Connection to VL 414/VL 200/ AL 400 722 downdraft via network cable.
Installation in a base cabinet possible with a cut out in the cabinet base or behind the cabinet positioned on the floor.
To replace the filter the blower must be accessible.
The filter replacment is possible from the front and rear of the blower.
For optimum performance in air recirculation we recommend an outflow surface area of at least 157 sq. in. (400 cm^2).
Appliance weight: approx. 27 lb.

Rating
Total rating: 170 W.
Total amps: 3.
Connecting cable 68 7/8″ with plug.
78″ network cable included.

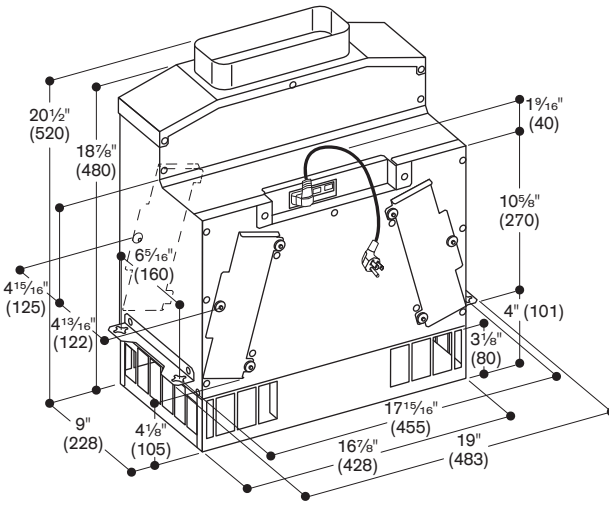

Filter replacement

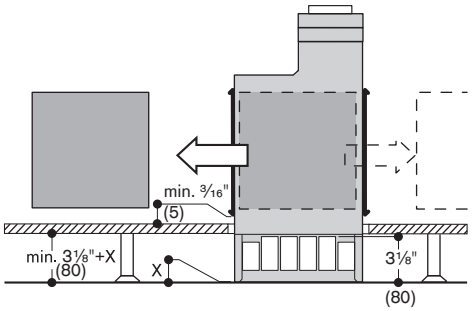

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.