GAGGENAU



Vario 200 series gas cooktop
VG 264

VG 264 220CA
Black aluminum control panel.
Width 24″ (60 cm).
Surface installation only.
Natural gas.
For conversion to LP gas, LP kit (Part No. 10009476) must be ordered.

Installation accessories

VV 200 010
Stainless steel connection strip for combination with other Vario 200 series appliances.

VV 200 020
Black connection strip for combination with other Vario 200 series appliances.

Optional accessories

LS 041 001
Stainless steel, removable air deflector for gas Vario next to VL 200 downdraft.

Combinable with:
2x VL 200 120
AW 442 720
AI 230 700
AW 230 790
AF 210 791 / AF 210 7611

Good to know:
Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights
- Can be combined with other Vario 200 series products.
- Control panel for comfortable and secure operation.
- Mechanical power level regulation for 9 power levels, with exact setting and reproduction of flame size.
- Solid smooth-surface cast-iron pan supports for easy and safe positioning of cookware.
- Up to 33,400 BTU on 4 burners.

Cooking zones
2 high-output burners
1,900 – 10,200 BTU (560 – 3,000 W), suitable for pots up to max. ø 8 ¾″.
2 standard burners
1,300 – 6,500 BTU (380 – 1,900 W), suitable for pots up to max. ø 7 ⅞″


Operation
Control knobs with illuminated ring.
Integrated control panel.
One-handed operation.
Electric ignition.

Features
Two-part cast-iron pan support with continuous pot surface.

Safety
Thermoelectric safety pilot.
Residual heat indication.
Operation indicator.


Planning notes
Equipped for natural gas. For conversion to LP gas, 2x LP kits (Part No. 10009476) must be ordered.
No intermediate shelf required.
Appliance can be snapped into the countertop from above.
A minimum lateral clearance of at least 6″ (150 mm) from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation fitted.
With a total connected load of more than 37,533 BTU (11 kW) local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.
Minimum clearance between gas cooktop(s) with more than 37,533 BTU (11 kW) and ventilation hood 27 ½″ (70 cm).
Appliance weight: approx. 35 lbs (16 kg).

Rating
Total rating gas/electric:
33,400 BTU / 10 W.
Total amps: 15.
Electrical: 120 V / 60 Hz.
Electrical connection:
Plan for a 59″ long connecting cable with 3 prong NEMA 5-15 plug.

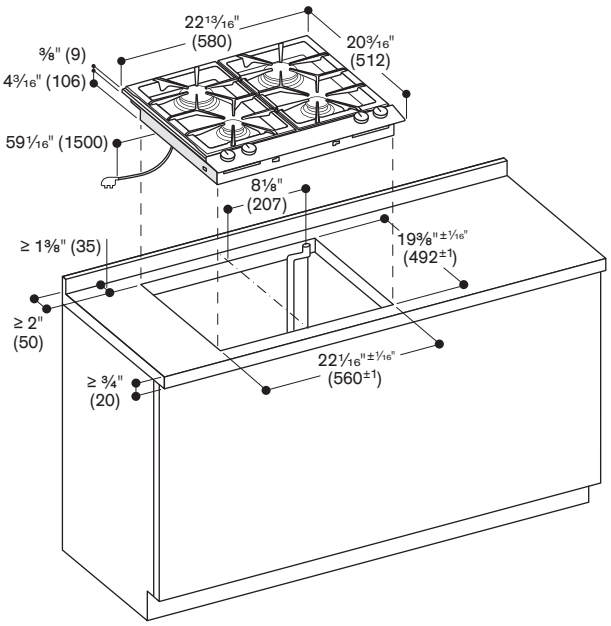

Minimum distance from the appliance cut out to the side wall 11 13/16" (300 mm).

Gas connection

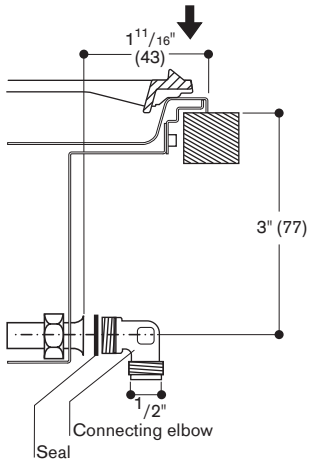

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.