GAGGENAU



**Vario 200 series electric grill**
**VR 230**

**VR 230 620**
Black aluminum control panel.
Width 12″ (28 cm).
Surface installation only.

**Included accessories**

1 grease collecting insert.
1 cast-iron grill.
1 lava stone.
1 cleaning brush.

**Installation accessories**

**VV 200 010**
Stainless steel connection strip for combination with other Vario appliances of the 200 series.

**VV 200 020**
Black connection strip for combination with other Vario appliances of the 200 series.

**Optional accessories**

**LV 030 000**
Lava stones for refilling.

**VD 200 020**
Black appliance cover.

**Combinable with:**

2x VL 200 120
AW 442 720
AI 230 700
AW 230 790
AF 210 791

**Good to know:**

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

**Highlights**

— Can be combined with other Vario 200 series products.
— Control panel for comfortable and secure operation.
— 2 zones, separately controlled.
— Open cast-iron grill, lava stones.
— Not recommended for recirculating ventilation.

**Operation**
Control knobs with illuminated ring.
Integrated control panel.
9 switching levels.


**Features**
2 separately controllable swing-out grilling elements (1,500 W).
Join function.
Cast-iron grill.
Stainless steel lava stone container, and grease collecting insert, dishwasher-safe.

**Safety**
Pre-heat and residual heat indicator.
Operation indicator.
Safety shut-off.

**Planning notes**
If using the VL 200 downdraft for ventilation, the Vario electric grill must be placed between two VL downdrafts. Recirculation is not recommended for the electric grill.
Appliance can be snapped into the countertop from above.
A minimum clearance of at least 8″ (200 mm) from adjacent heat-sensitive cabinet or contact surfaces must be observed or thermal insulation fitted.
Appliance weight: approx. 37.5 lbs (17 kg).

**Please read additional planning notes on pages 98–99.**

**Rating**
Total rating: 3,000 W (240 V).
Total amps: 16.
Electrical: 208 / 220–240 V / 60 Hz.
Electrical connection:
Hardwire required, 59″ cable length.

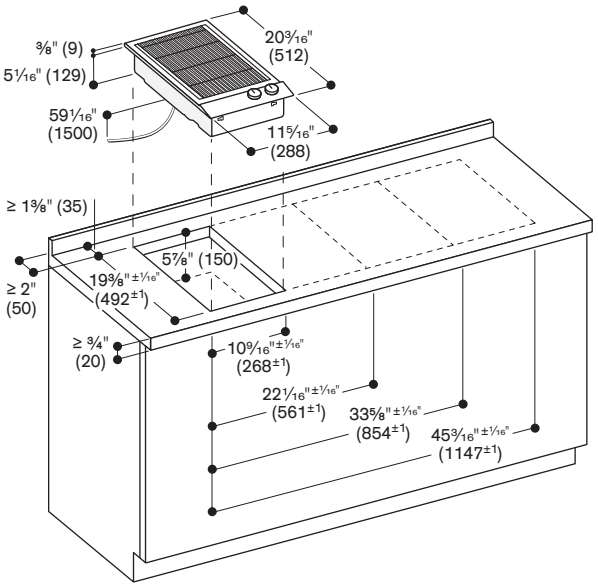


Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.