Series 6, wall-mounted cooker hood, 60 cm, clear glass black printed, Black
DWK67PJ60M



DWZ6HK1E2 Carbon fleece filter

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

- **With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.**
- **Metal Grease Filter**: cleans the air, captures grease, easy monthly clean-up.
- **Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)**
- **Absorbs odors with Charcoal Replacement Filters (Available for sale)**
- **Ducted or Non-ducted Options**

Color chimney: ..... Black
Typology: .....Wall-mounted
Length electrical supply cord: ..... 180 cm
Required niche size for installation (HxWxD): ..... GENERAL.N_A mm
Height of the chimney: ..... GENERAL.N_A mm
Height of product, without chimney: ..... 400 mm
Net weight: ..... 12.4 kg
Type of control: .....Electronic
Number of speed settings: .....2-stage + Intensive
Max. air extraction: ..... 510 m^3/h
Boost position output recirculating: .....307.0 m^3/h
Max. air recirculation: ..... 296 m^3/h
Boost position air extraction: ..... 700 m^3/h
Number of lights: 2
Noise level: .....59 dB(A) re 1 pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: .....Washable aluminium
Odour filter: ..... No
Operating Mode: .....Convertible
Type of lamps used: ..... LED
Total power of the lamps: ..... GENERAL.N_A W
Grease filter type: .....Kassette
Clean filter reminders: .....Yes
Connection rating: ..... 234 W
Fuse protection: .....GENERAL.N_A A
Voltage: ..... 220-240 V
Frequency: ..... 50-60 Hz
Plug type: ..... GB plug
Installation typology: .....Wall-mounted
Material body: ..... Glass
Plug type: ..... GB plug
Dimensions of the product, with chimney (if exists) (in): .....x x
Dimensions of the packed product: ..... 17.91 x 27.36 x 17.91
Net weight: .....27.000 lbs
Gross weight: ..... 31.000 lbs
Motor location: ..... Integrated motor in hood body
No-return airflow flap: ..... Yes
Length electrical supply cord: ..... 180 cm
Dimensions of the product, with chimney (if exists): ....750x596x390 mm
Dimensions of the packed product (HxWxD): .....455x695x455 mm
Net weight: .....12.4 kg
Gross weight: ..... 13.9 kg

4 242005 463060

Series 6, wall-mounted cooker hood, 60 cm, clear glass black printed, Black
DWK67PJ60M

The wall-mounted chimney hood: mount it on the wall, giving you complete freedom in your kitchen planning.

Variant:
- DWK67PJ60M
- Inclined glass brand design - black
- Wall mounted hood
- black with glass canopy
- 596 mm width
- Suitable for ducted or re-circulated extraction
- Recirculating kit

Core Features:
- Capacitor motor
- Silence blower technology
- Power rating: 234 W
- Voltage: 220 - 240 V
- Power frequency: 50-60 Hz
- Light dimmer function : the brightness of the lighting elements can be adjusted.
- Colour Temperature: 3000 K
- Light Intensity: 260 lux
- Powerboost position
- 1 metal grease filter(s).

Performance Exhaust:
- Noise min./max. Normal Level: 46/59 dB*
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 290 m3/h; noise level 46 dB (A) re1pW Speed 2: extraction rate 510 m3/h; noise level 59 dB (A) re1pW Intensive Speed 1: extraction rate 700 m3/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A*
- Average Energy Consumption: 49.2 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*
- An alternative advanced filter technology is available as accessory which is capable of capturing up to 85% of the grease in the air.


Comfort:
- TouchControl for extractor speeds and light
- 2 speeds plus intensive setting
- Automatic reset from intensive to normal setting after 9 min
- After run automatic: 15 min.
- Colour Temperature: 3000 K
- Light Intensity: 260 lux

Cleaning Comfort:
- Gesture control with integrated infrared sensor for close range swipe gesture detection
- Metal grease filter, dishwasher safe
- grease filter
- Easy to clean smooth surfaces and materials
- Wide opening front panel via piston for better extraction and cleaning purposes

Planning and Installation Information:
- Dimensions exhaust air (HxWxD): 750-750 x 596 x 390 mm
- Dimensions recirculating (HxWxD): 750-750 x 596 x 390 mm
- Dimensions recirculating installation, chimless (HxWxD): 471mm x 596 mm x 390 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable lenght 1.8 m
- with one-way flap


Series 6, wall-mounted cooker hood, 60 cm, clear glass black printed, Black
DWK67PJ60M

Measurements in mm

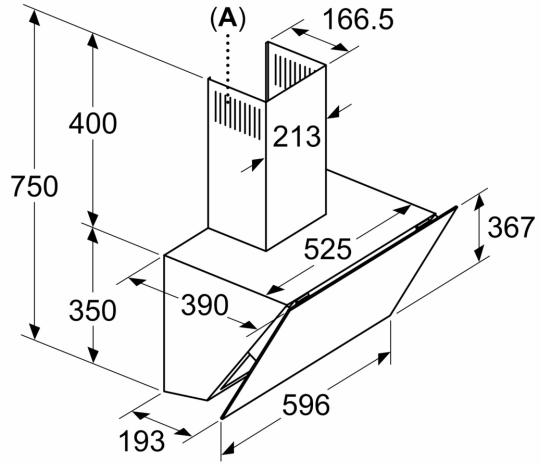


A: Air outlet – slots for exhaust air to be mounted facing down

Measurements in mm

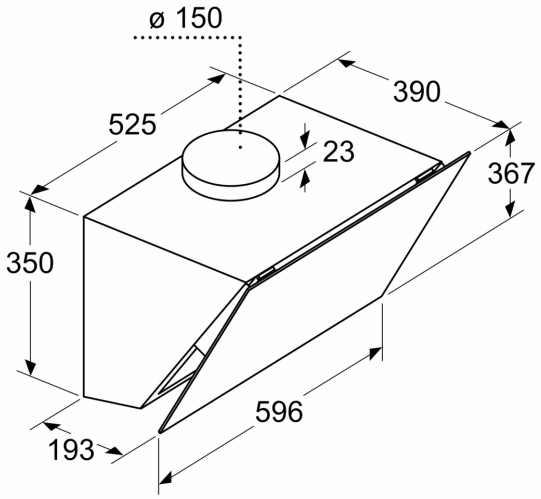


Measurements in mm

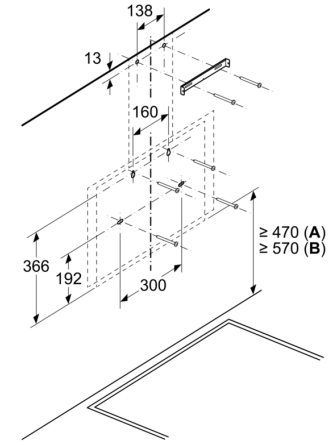

A: Electric

B: Gas - from upper edge of pan support

Measurements in mm

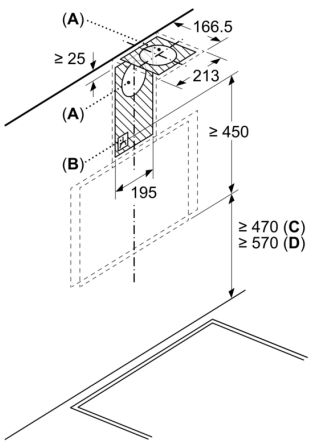

A: Exhaust-air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support