

iQ700, Built-in warming drawer,
60 x 14 cm, Black
BI830CNB1B



The warming drawer is perfect for preheating crockery, for keeping foods warm and for gentle cooking.

- ✓ push&pull – No-handle drawer that’s easy to open and close.
- ✓ The 14 cm high multifunctional warming drawer is ideally combined with a 45 cm compact appliance.
- ✓ The heated sheet admits a regulation in four temperature levels from 30°- 80°C glass surface temperature

Color / Material Front: Black
Built-in / Free-standing: Built-in
Dimensions (HxWxD): 140x594x548 mm
Dimensions of the packed product: 210 x 660 x 660 mm
Min. required niche size for installation (HxWxD): .. 140 x 560 x 550 mm
Capacity (in number of plates): 12
Maximum number of espresso cups: 64
Net weight: 15.5 kg
Gross weight: 17.5 kg
EAN code:4242003788509
Fuse protection:10 A
Voltage:220-240 V
Frequency:60; 50 Hz



iQ700, Built-in warming drawer, 60 x 14 cm, Black BI830CNB1B

- Heating plate made of toughened glass
- Temperature control with 4 levels: 40 °C - 80 °C (glass surface temperature)

Convenience

- Max weight up to 25 kg
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC

Technical Info

- Length of mains cable: 150 cm
- Appliance dimensions (HxWxD): 140 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 140 mm x 560 mm - 568 mm x 550 mm

Design

- Handleless push&pull opening mechanism
- Rotary Control
- User-friendly electronics: extremely easy and comfortable operation
- Cavity volume: 20 l usable litres
- Suitable for: Pre-warming of crockery, Keeping drinks and food warm, Dough proving, Defrosting, Slow cooking
- Handleless push&pull opening mechanism


Safety and Environment

- Door contact switch
- Total connected load electric: 0.81 KW
- Nominal voltage: 220 - 240 V

Dimensions


- Please reference the built-in dimensions provided in the installation drawing

**iQ700, Built-in warming drawer,
60 x 14 cm, Black
BI830CNB1B**

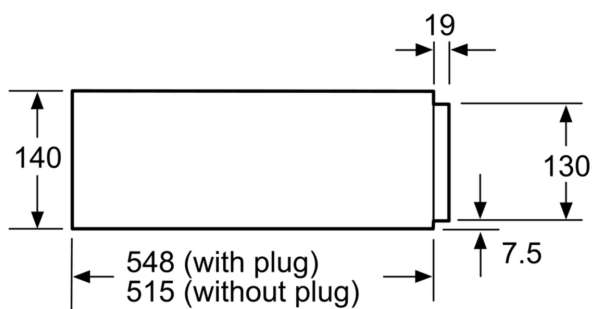

Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

measurements in mm

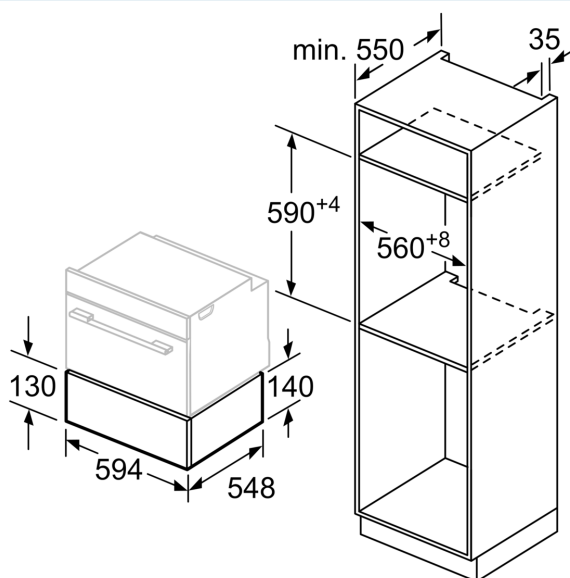

measurements in mm