


iQ700, Induction cooktop, 80 cm,
Black,
EX875KYV1E

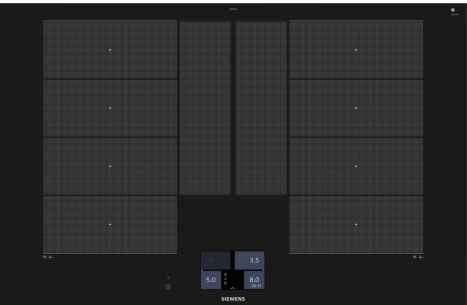

HZ9SE030 Set of 2 pots and 1 pan, HZ9SE040 4 pieces Set, HZ9SE060 6 pieces Set, HZ390011 Stainless Steel roaster with glas lid, HZ390012 Steaming Rack for Stainless Steel roaste, HZ390210 System pan diameter 15 cm, HZ390220 System pan diameter 19 cm, HZ390230 System pan diameter 21cm, HZ390250 System pan diameter 28 cm, HZ390512 Teppan Yaki (large), HZ390522 Griddle Plate, HZ394301 Connecting strip, HZ9ES100 Espresso maker 4 cups, HZ9FE280 Iron pan Ø 18 / 28 cm

The modern flexInduction cooktop - for greater flexibility when cooking.

- ✓ flexInduction Plus – Smart, extendable cooking zone adapts to your cookware
- ✓ For easy operation and good readability from any perspective - TFT Touchdisplay.
- ✓ powerMove Plus: enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ Control different functions of your rangehood, like power level or light, directly from your cooktop (with matching rangehood) - cookConnect system.
- ✓ fryingSensor Plus – No more burning or scorching your meals.

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Source of energy: Electric
Total number of positions that can be used at the same time: 4
Min. required niche size for installation (HxWxD):51 x 750-780 x 490-500 mm
Width of the appliance:812 mm
Dimensions (HxWxD): 51 x 812 x 520 mm
Dimensions of the packed product: 126 x 953 x 608 mm
Net weight: 15.0 kg
Gross weight: 18.7 kg
Residual heat indicator:separate
Location of control panel: Front
Color of surface: Black, Alu, brushed
Length electrical supply cord: 110.0 cm
EAN code:4242003927212
Voltage:220-240 V
Frequency:50; 60 Hz



iQ700, Induction cooktop, 80 cm, Black, EX875KYV1E

- 80 cm Cooktop Induction: space for 4 pots or pans.

Flexibility of cooking zones

- 2 Flex zones + extended Flex zone: use cookware of any shape or size anywhere within the 40cm long zone or even place it laterally.
- Cooking zone front left: 200 mm, 230 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 200 mm, 230 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 200 mm, 230 mm, 2.2 KW (max power 3.7 KW)
- Cooking zone front right: 200 mm, 230 mm, 2.2 KW (max. power 3.7 KW)

Usage convenience

- FullTouch TFT Display: easily operate the cooktop using the touch display and explore all available functions thanks to full-text information and images.
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Switch-off timer: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer: shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- powerBoost function for all cooking zones: boil water faster with up to 50% more energy than at the highest standard level.
- powerMove Plus: increase or decrease the power level simply by moving the pot forwards or backwards.
- PowerTransfer: when moving a pot to a different cooking zone, transfer all previous settings to the new zone at the touch of a button.
- QuickStart - Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

Cooking assistance

- Dish categories: easily find the right temperature setting for a certain dish in the touch display.
- FryingSensor with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.

Connectivity

- Remote Monitoring and Control: check if the cooktop is switched off even when not at home, and find recipes or additional functions in the Home Connect app.
- cookConnect (with matching rangehood): automatically activates the rangehood when cooking, thanks to the WiFi connection of cooktop and suitable rangehood.

Design

- Stainless steel side profiles

Safety

- 2-stage (h/H) digital residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- wipeProtection function: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction (customisable).
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation

- Dimensions of the product (HxWxD mm): 51 x 812 x 520
- Required niche size for installation (HxWxD mm) : 51 x 750 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Power cord: 1.1 m, Cable included

Accessories

- adjustment strip 750 - 780 mm included

iQ700, Induction cooktop, 80 cm,
Black,
EX875KYV1E

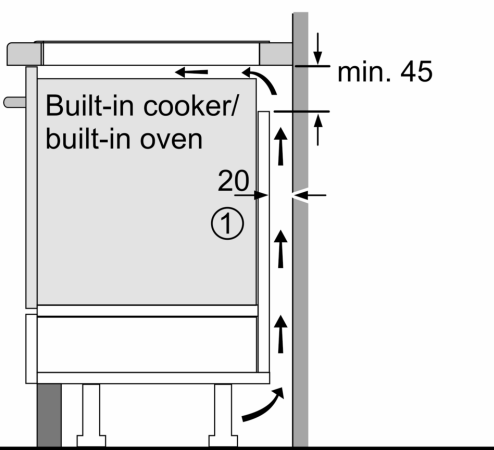


Diagram showing the side view of a built-in cooker/built-in oven. The unit is shown with its front panel and internal components. The diagram indicates a minimum clearance of 45 mm between the top of the unit and the upper cabinet. A minimum clearance of 20 mm is shown between the side of the unit and the side cabinet. A note indicates that a ventilation gap must be present at the bottom of the unit.

① Ventilation gap must be present

All measurements in mm

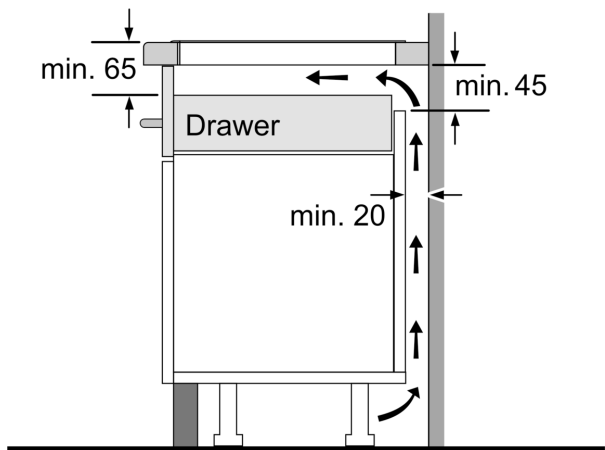


Diagram showing the side view of a drawer unit. The unit is shown with its front panel and internal components. The diagram indicates a minimum clearance of 45 mm between the top of the unit and the upper cabinet. A minimum clearance of 65 mm is shown between the top of the unit and the upper cabinet. A minimum clearance of 20 mm is shown between the side of the unit and the side cabinet.

Measurements in mm

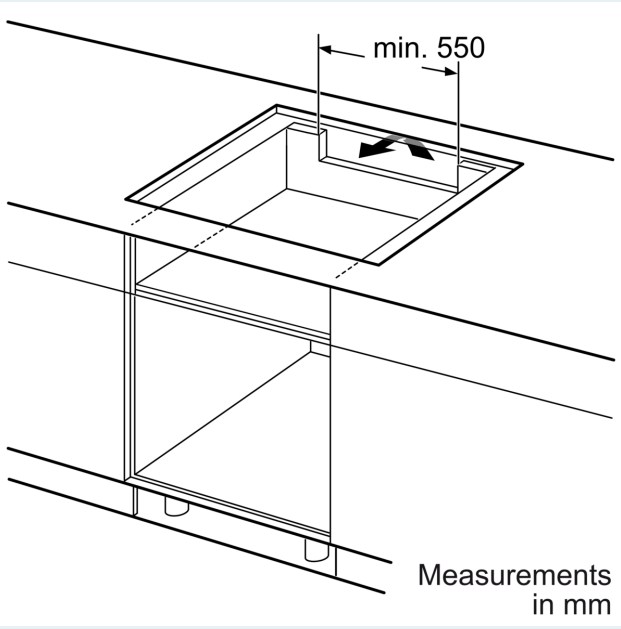


Diagram showing the top view of the induction cooktop. The unit is shown with its front panel and internal components. The diagram indicates a minimum clearance of 550 mm between the front of the unit and the front cabinet.

Measurements in mm