


iQ700, Built-in oven, 60 x 60 cm,
Black
HB976GMB1A

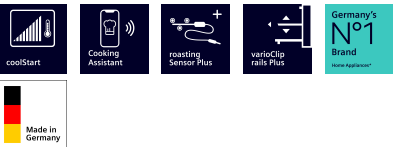

HZ638070	Full ext rails, level independent, pyro
HZ6BMA00	Assembly kit for vertical installation
HZ327000	Baking stone
HZ629070	Air Fry & Grill tray
HZ631070	Baking tray, enamelled
HZ633001	Lid for professional pan, enamelled
HZ633070	Professional pan with grid, enamelled

The intelligent oven with Cooking Assistant for intuitive programme setting, activeClean for less effort in oven cleaning and roastingSensor Plus for excellent results.

- ✓ fastPreheat – Heat the oven quickly. coolStart – Eliminate preheating for frozen foods.
- ✓ Cooking Assistant – Easily set the right programme via the Home Connect app.
- ✓ activeClean® – The automatic, self-cleaning oven system for less efforts in oven cleaning.
- ✓ roastingSensor Plus – The intelligent sensor provides live updates for flawless roasting results.
- ✓ varioClip rails Plus – Flexible cooking, baking and steam cooking on every level.

Color / Material Front: Black
Built-in / Free-standing: Built-in
Door opening: Drop down
Cleaning system: Pyrolytic + humidClean
Control Panel Material: Glass
Door Material: Glass
Dimensions (HxWxD): 595x594x548 mm
Dimensions of the packed product: 670x670x680 mm
Required niche size for installation (HxWxD): ..585-595 x 560-568 x 550 mm
Cavity dimensions: 357.0 x 480 x 415.0 mm
Usable volume of cavity: 71 l
Net weight: 39.2 kg
Gross weight: 41.8 kg
EAN code:4242003902103
Power supply: 3600 W
Fuse protection: 16 A
Voltage:220-240 V
Frequency:50; 60 Hz
Length electrical supply cord: 120 cm



iQ700, Built-in oven, 60 x 60 cm, Black HB976GMB1A

Heating Functions

- Oven with 14 cooking functions: 4D hotAir, Top/ bottom heating, Hot air grilling, Full width grill, Half width grill, Pizza setting, coolStart (deep-frozen food special), Bottom heating, Low temperature cooking, Plate warming setting, Keep Warm, hotAir gentle, Conventional heat gentle, Air fry
- Heating methods only via Home Connect App: let rest, preheating
- Temperature range 30 °C - 300 °C
- Cavity volume: 71 net usable litres
- Cavity: smooth

Racks and Rails

- Number of shelf levels: 5
- varioClip rails Plus, pyrolytic proof, full extension, with Stop function

Design

- studioLine Black Steel Design
- Touch control
- studioLine Glass handle
- Cavity inner surface: enamel

Cleaning

- activeClean® – automatic pyrolytic self-cleaning function with automatic safety door lock
- humidClean Plus program - easy cleaning of a lightly soiled cooking cavity
- Full glass inner door

Convenience

- Cooking Assistant
- TFT-Touchdisplay Plus
- Electronic clock and timer
- Temperature proposal, Residual heat indicator, Actual temperature display, Meat probe function
- Oven door with SoftOpen and SoftClose door
- cookControl Pro
- roastingSensor with three measuring points
- roastingSensor Plus multipoint meat probe
- Automatic rapid heat up
- coolStart - eliminates preheating for frozen foods
- Halogen lighting
- Integrated cooling fan
- HomeConnect
- 4D hotAir: even heat distribution on any level, also simultaneously
- Bottom hinged door

Accessories

- 1 x air fry & grill tray, 2 x combination grid, 1 x universal pan

Safety Features

- Low door temperature during pyrolytic cleaning
- Quadruple glazed door with heat reflective glass
- Automatic door lock during pyrolysis, Child lock, Automatic safety

switch-off function, Residual heat indicator, Start button, Door contact switch

- Maximum door temperature 30° C

Technical Information


- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW

Dimensions


- Appliance dimensions (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

**iQ700, Built-in oven, 60 x 60 cm,
Black
HB976GMB1A**


Installing two appliances on top of each other
Air exchange

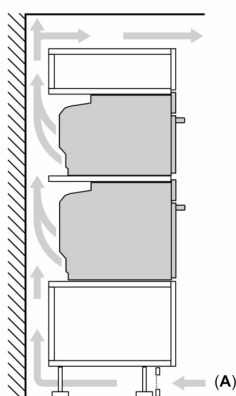

A: Air inlet $\geq 200 \text{ cm}^2$

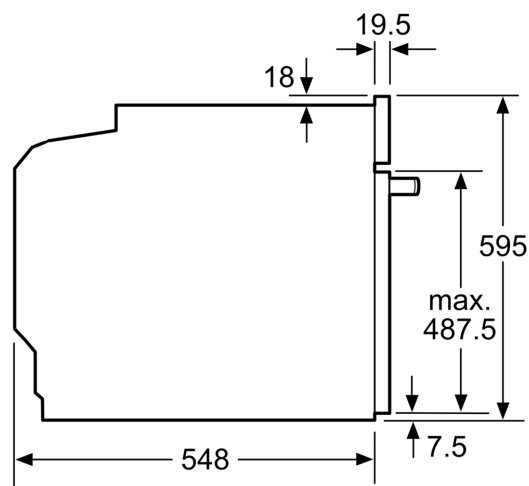

measurements in mm

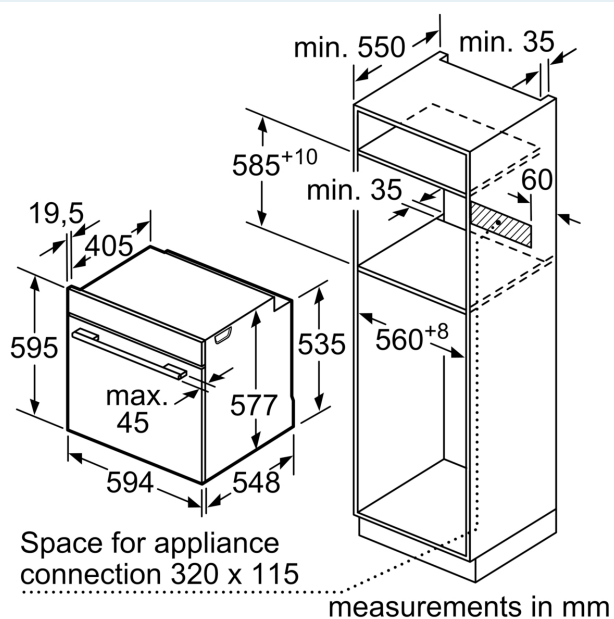

Measurements in mm
Worktop thickness when installing underneath a hob
(incl. substructure, if required)

Hob type	raised	flush
Induction hob	≥ 37	≥ 38
Full surface induction hob	≥ 47	≥ 48
Gas hob	≥ 30	≥ 38
Electric hob	≥ 27	≥ 30

