

iQ500, integrated rangehood, 52 cm, Stainless steel
LB57574AU



LZ10ITP00	Long Life odor filter (replacement)
LZ11ITD11	Long Life recirculation kit external
LZ11IXB16	Clean Air Plus odor filter (replacement)
LZ11IXC16	Clean Air Plus recirc. kit external
LZ55651	Standard odor filter (replacement)
LZ55750	Standard recirculation kit

The powerful canopy rangehood is concealed above the cooktop.

- ✓ LED light: Optimal visibility and atmosphere when cooking.
- ✓ The highly efficient 610 m3/h extraction rate provides ideal air quality in the kitchen.
- ✓ The intensive setting temporarily increases the extraction rate when kitchen vapour is especially intense, with automatic revert to previous setting after 6 min.

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): 418mm x 496.0mm x 264mm mm
Minimum distance above an electric cooktop: 600 mm
Minimum distance above a gas cooktop: 650 mm
Net weight: 7.3 kg
Type of control: Electronic
Number of power settings: 3-stages + intensive setting
Max. ducted extraction: 560 m³/h
Boost position output recirculating: 581 m³/h
Max. recirculation: 533 m³/h
Boost position air extraction: 610 m³/h
Number of lights: 2
Noise level: 67 dB(A) re 1pW
Diameter of air outlet: 150 / 120 mm
Grease filter material: Washable aluminium
EAN code: 4242003768266
Power supply: 252 W
Fuse protection: 3 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: AU plug
Installation type: Built-in



iQ500, integrated rangehood, 52 cm, Stainless steel LB57574AU

Design & Innovation

- Appliance colour: Stainless steel
- Metal grease filters with stainless steel cover

Convenience

- low-lift push buttons for power and light

Power and Mode of Operation

- Suitable for ducted and re-circulating operation
- Accessory required for recirculation mode: Standard recirculation kit
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 560 m³/h. Intensive 610 m³/h
- 3 power levels plus intensive setting
- Intensive operation automatic revert - 6min
- Rim ventilation
- Twin channel high performance fan motor

Cleaning

- Dishwasher safe Metal grease filters

Safety and Quality

- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 67dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW


Dimensions (HxWxD)

- For installation in a kitchen cabinet
- 120 or 150 mm tube connection diameter
- Appliance dimensions (HxWxD): 418 x 520 x 300 mm
- Installation dimensions (HxWxD): 418 x 496 x 264 mm
- Electrical cable length 1.5 m
- Noise min./max. Normal Level: 50/67 dB


Convenience

- 2 x 1 Watt LED lights
- Electronic controls with low-lift push buttons


iQ500, integrated rangehood, 52
cm, Stainless steel
LB57574AU

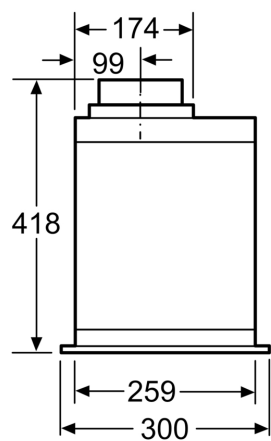

measurements in mm

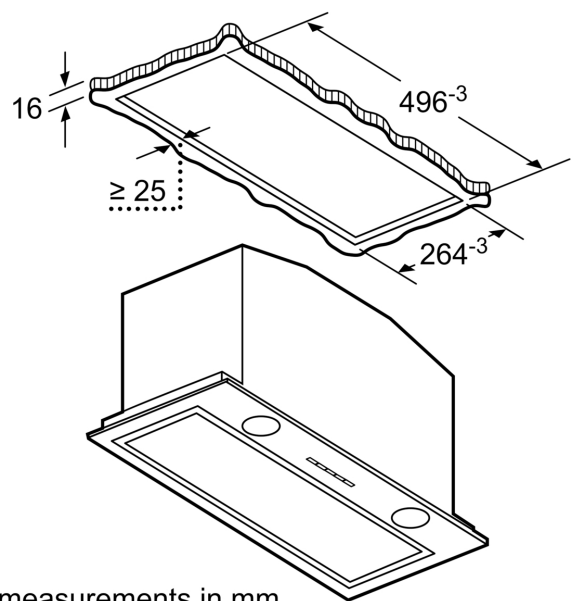


measurements in mm

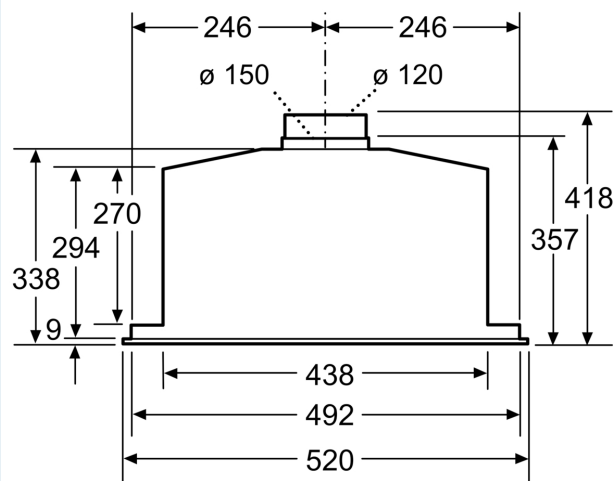

measurements in mm

Measurements in mm

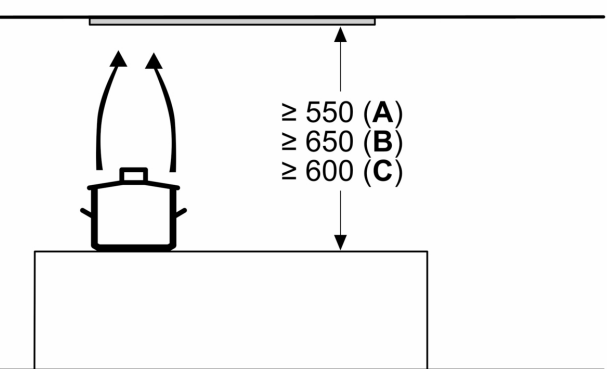

- A: Electric
- B: Gas - from upper edge of pan support
- C: Electric - for Australia and New Zealand