

iQ300, Slideout rangehood, 60 cm, Silver metallic LI67SA530A



The powerful slideout rangehood practically disappears into the upper cabinet.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ Extremely quiet – The quiet rangehood that keeps the calm your kitchen.
- ✓ The intensive setting temporarily increases the extraction rate when kitchen vapour is especially intense, with automatic revert to previous setting after 6 min.

Features

Technical Data

Typology : Pull-out
 Approval certificates : Australia Standards, VDE
 Length electrical supply cord : 175 cm
 Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
 Minimum distance above an electric cooktop : 430 mm
 Minimum distance above a gas cooktop : 650 mm
 Net weight : 11.116 kg
 Type of control : Electronic
 Number of power settings : 3-stages + intensive setting
 Maximum output air extraction : 391 m³/h
 Boost position output recirculating : 496 m³/h
 Maximum output recirculating air : 358 m³/h
 Boost position air extraction : 739 m³/h
 Number of lights : 2
 Noise level : 54 dB(A) re 1 pW
 Diameter of air outlet : 150 / 120 mm
 Grease filter material : Washable aluminium
 EAN code : 4242003769744
 Connection Rating : 146 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50-60 Hz
 Plug type : AU plug
 Installation type : Built-in



4 242003 769744

**iQ300, Slideout rangehood, 60 cm,
Silver metallic
LI67SA530A**

Features

Design & Innovation

- 2 x 3 Watt LED Lights

Convenience

- For installation into a 60 cm cupboard
- 3 power levels plus intensive setting
- low-lift push buttons (3 power levels plus intensive setting) with Electronic display

Power and Mode of Operation

- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 391 m³/h
- Intensive 739 m³/h
- Suitable for ducted and re-circulating operation
- Accessories required for recirculation mode: CleanAir Module
- 2 single inlet vertical fans, Efficient BLDC technology
- Intensive operation automatic revert - 6min
- Automatic run on for Automatic run on - 10 min

Cleaning

- Cassette with alu frame

Safety and Quality







- Noise level according to EN 60704-3 exhaust air:
- Max. normal use: 54 dB(A) re 1 pW
- Intensive: 68 dB(A) re 1 pW
- 5 year warranty

Dimensions (HxWxD)

- Power rating: 146 W
- Appliance dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

iQ300, Slideout rangehood, 60 cm,
Silver metallic
LI67SA530A

Dimensioned drawings

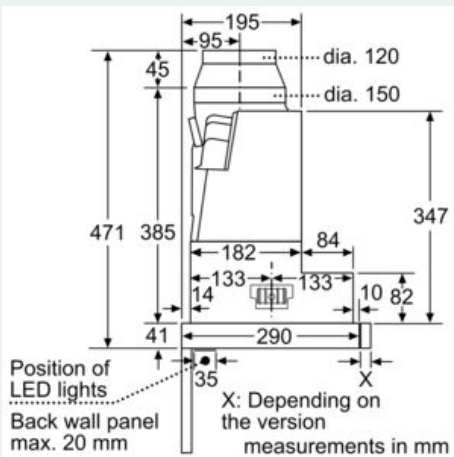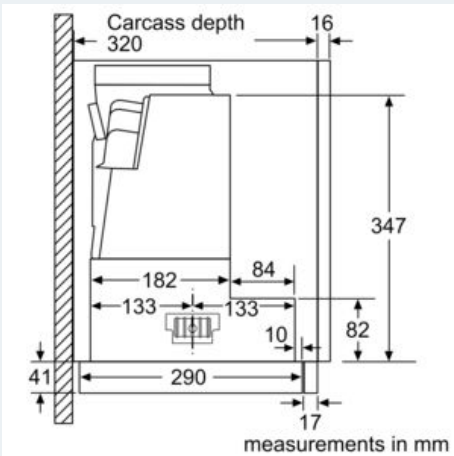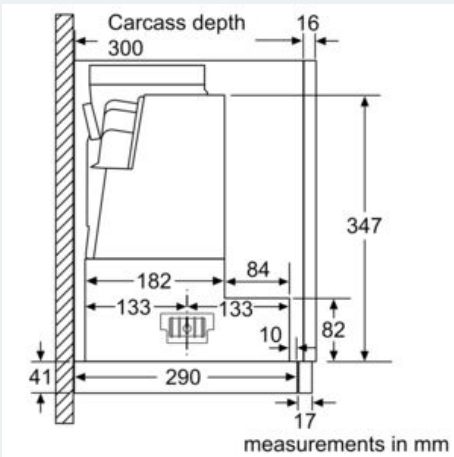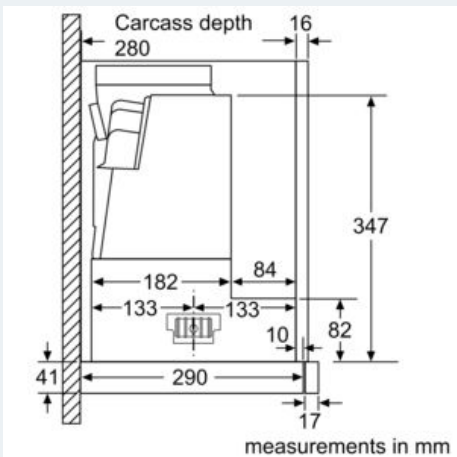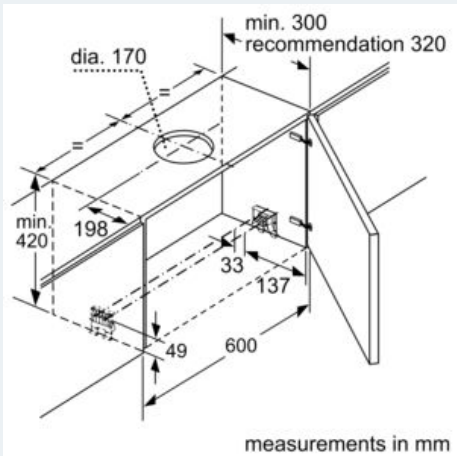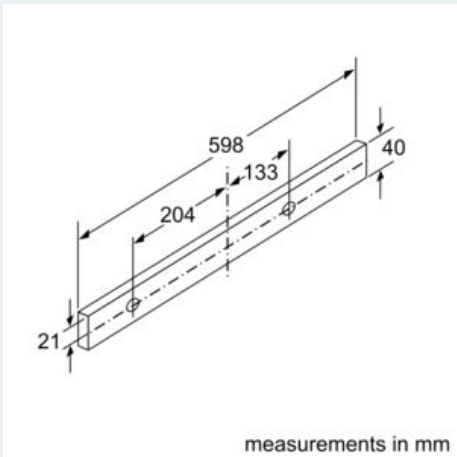

**iQ300, Slideout rangehood, 60 cm,
Silver metallic
LI67SA530A**

Dimensioned drawings

