


Series 8, Flex induction cooktop, 80 cm, surface mount with frame PXE875DC1E

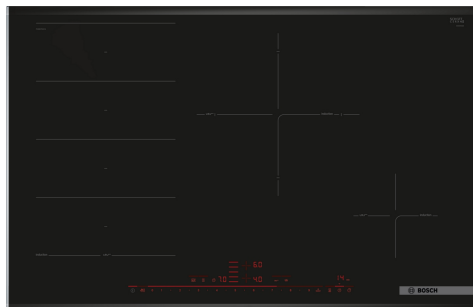

HEZ32WA00	Wireless food thermometer
HEZ390522	Griddle Plate
HEZ9FE280	Iron pan Ø 18 / 28 cm
HEZ9FF010	Flex Pan, large
HEZ9FF030	Flex Pan set, 3 pcs.
HEZ9FF040	Flex Pan set, 4 pcs.
HEZ9SE060	6 pieces Set
HEZ9TY010	Teppan Yaki

The FlexInduction cooktop: you can place multiple pots and pans or large cookware anywhere on the flexible cooking zone.

- **FlexInduction:** Combines two cooking zones into one large, even heating area for flexible cooking.
- **DirectSelect Premium:** Easy, direct control on a spacious 30cm panel with 17 precise power levels.
- **PerfectFry sensor:** Automatically regulates the pan temperature to prevent food from burning.
- **Power Boost:** Up to 35% faster heating compared to highest power level.
- **Move Mode:** Automatically divides the cooking zone into three pre-set power levels for boiling, cooking and simmering.

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Total number of positions that can be used at the same time: 4
 Required niche size for installation (HxWxD): 51 x 750-780 x 490-500 mm
 Width of the appliance: 816 mm
 Dimensions (HxWxD): 51x816x527 mm
 Dimensions of the packed product (HxWxD): 126x953x603 mm
 Net weight: 14.9 kg
 Gross weight: 17.3 kg
 Residual heat indicator: Yes
 Location of control panel: Front
 Basic surface material: Ceramic glass
 Color of surface: Black, Alu, brushed
 Length electrical supply cord: 110 cm
 EAN code: 4242002861746
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



4 242002 861746

Series 8, Flex induction cooktop, 80 cm, surface mount with frame PXE875DC1E

The FlexInduction cooktop: you can place multiple pots and pans or large cookware anywhere on the flexible cooking zone.

- 80 cm cooktop: space for 4 pots or pans

Flexibility of cooking zones

- FlexInduction Zone: use cookware of any shape or size anywhere within the 40cm long zone.
- Cooking zone front left: 240 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 240 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 280 mm, 2.6 KW (max power 3.7 KW)
- Cooking zone front right: 145 mm, 1.4 KW (max. power 2.2 KW)

Comfort & Convenience

- Direct Select Premium Touch Control: directly control the power on the extra large illuminated touch bar (invisible when switched off).
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function - low setting for keeping food warm at the touch of a button: keep dishes warm at preset low power level.
- Timer with automatic switch off for all zones: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer: shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- Power Boost for all zones : boil water faster with up to 50% more power than at the highest standard level.
- ShortBoost function - reduce the time to heat up pans: heat up pans more quickly than at the highest standard level while protecting the pan coating.
- Move Mode - 3 Automatic Power Levels: increase or decrease the power level simply by moving the pot forwards or backwards.
- QuickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

Cooking assistance

- FryingSensor with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.
- Automatic zone selection: when switched on, the cooktop automatically selects the cooking zone on which a new cookware is placed.
- Cooking zones will automatically join and separate based on the shape and size of the cookware placed.
- Automatic Setting Transfer: when moving a pot to a different cooking zone, transfer all previous settings to the new zone at the touch of a button.
- When moving a pot on the Flex zone, the settings adjust instantly

and the cooking zone adapts to the size of the cookware

Design

- Stainless steel side profiles with beveled front


Safety

- Digital 2-stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- WipeProtection: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation


- Dimensions of the product (HxWxD mm): 51 x 816 x 527
- Required niche size for installation (HxWxD mm) : 51 x 750 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- PowerManagement Function: enables the total power of the cooktop to be limited if necessary (for suitability and installation, consult a licensed electrician).
- Power cord: 1.1 m, Cable included

Series 8, Flex induction cooktop, 80 cm, surface mount with frame PXE875DC1E

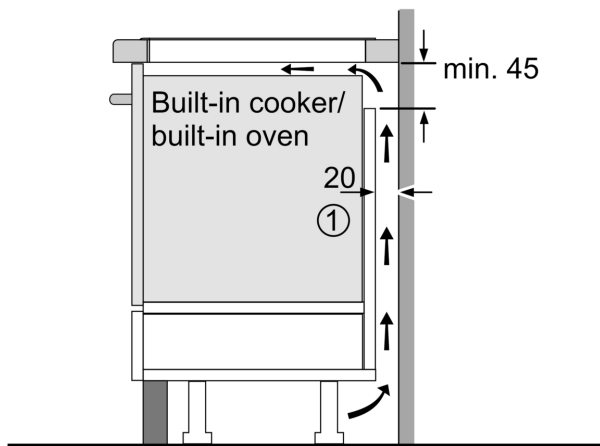

① Ventilation gap must be present


All measurements in mm

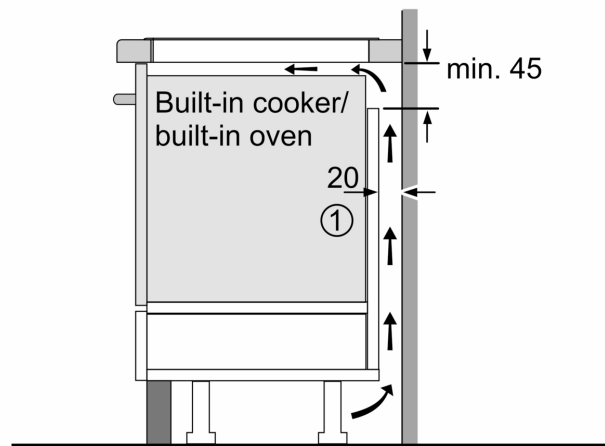

① Ventilation gap must be present

All measurements in mm


measurements in mm



A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

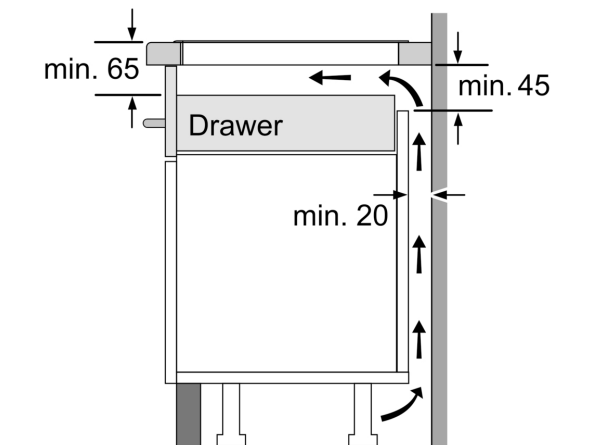

Measurements in mm

