Series 2, free-standing dishwasher, 60 cm, Brushed steel anti-fingerprint SMS26AI03A

- **Auto Program**: Automatically the best cleaning performance.
- **EcoSilence Drive**: Especially energy-saving and silent in operation with a particularly high life span.
- **Dosage Assist**: Allows the tablet to dissolve steadily, ensuring spotless dishes without leftovers.
- **AquaStop**: The safety net against water damages. A warranty through the lifetime of the dishwasher.
- **Extra Dry**: Selectable option for additional drying.

Maximum number of place settings:	13
Water consumption in litres per cycle of the eco programme:	13.5 l
Built-in / Free-standing:	Free-standing
Height of removable worktop:	30 mm
Depth with open door 90 degree:	1155 mm
Adjustable feet:	Yes - all
Maximum adjustability feet:	20 mm
Adjustable plinth:	Adjustable plinth
Net weight:	45.1 kg
Gross weight:	46.3 kg
Connection rating:	2400 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Length electrical supply cord:	175 cm
Plug type:	Standard 10 Amp plug
Length inlet hose:	165 cm
Length outlet hose:	190 cm
EAN code:	4242005580217
Installation type:	Free-standing with built under possibility

4 242005 580217

SGZ0CL01	door lock mechancial, straight
SGZ1010	inlet and outlet hose extention
SMZ5300	GlassSecure Tray

Series 2, free-standing dishwasher, 60 cm, Brushed steel anti-fingerprint SMS26AI03A

Capacity

- Capacity: 13 place settings place settings

Consumption rates

- 3 Star Energy Rating energy rating, 3.5 Star Water Rating (WELS).
- Water consumption of 13.5 litres per wash using Eco in accordance with AS/NZS 6400 and Energy consumption of 305 kWh per year using the Eco program seven times per week. Consumption is based on cold water connection and is tested in accordance with AS/NZS 2007.2
- 13.5 l water consumption per wash based on Cold water connection, using Eco Wash program. In accordance with AS/NZS 6400
- Consumption test program: Eco 50°C

Design

- AquaSensor™ technology: Regulates the water usage depending on the type and degree of soiling
- DosageAssist: Maximises the effectiveness of detergent tablets. The tablet is dropped into a specially engineered tray and is completely dissolved. For superior cleaning performance and a quieter wash.
- EcoSilence Drive® quiet and energy-efficient brushless motor (BLDC)BLDC Main Pump: Variable water and spray pressure to achieve optimum cleaning resultsBLDC Drain Pump: Fast and extra quiet draining of water, no gargling sounds
- 5 Spray levels for maximum water contact and optimum wash results
- Polinox inner tub: The Polinox inner tub is extremely durable, odourless and rust-free. German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.

Wash Programs and Options

- 6programmes:
- Eco Wash : Energy efficient wash and dry. Mixed loads and soil levels 45 °C,
- Auto Wash: automatic wash & dry for Mixed loads & soil levels 45-65 °C,
- Pots and Pans : For heavily soiled dishes 70 °C,
- Quick 1hr : Quick wash & dry. Mixed loads & soil levels. 65 °C,
- Express Wash 45 °C,
- - Pre-Rinse: Rinse cycle only.
- 3 special options:
- Extra Dry,
- - HalfLoad: For half loads, reduces energy, water & time.,
- SpeedPerfect
- Machine Care

Performance

- Very quiet operation: 50 dB
- 3 stage self-cleaning filter system: Design that helps reduce the need to wash the filter and prevents blockages

Convenience

- Anti-fingerprint stainless steel finish
- Low friction wheels on bottom basket
- Rack Stopper to prevent derailing of bottom basket
- Time remaining display
- Time delay start: Delay program start time by 1-24 hours to suit your schedule

Safety

- AquaStop Plus: Water supply device with lifetime anti-flood protection

Flexibility

- Cutlery basket in bottom basket
- 2 foldable cup shelves in top basket
- Glass holder in top basket

Product Dimensions (H x W x D)

- H: 845 x W: 600 mm x D: 600 mm

2 year warranty
https://www.bosch-home.com.au/metapages/warranty

Series 2, free-standing dishwasher, 60 cm, Brushed steel anti-fingerprint
SMS26AI03A

measurements in mm

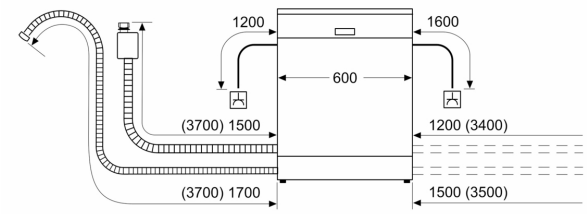

⊥ socket
( ) values with extension kit