

iQ700, Built-in fully automatic coffee machine, Black CT918L1D0



- ✓ TFT-Touchdisplay Pro – Large colour touch display for comfortable operation.
- ✓ Tap water connection – Prepare your coffee without refilling the water tank.
- ✓ Explore the huge variety of international coffee specialities with one swipe - Siemens coffeeWorld.
- ✓ Three different aroma profiles to choose from, according to your personal taste - aromaSelect.
- ✓ Save up to 30 individual coffee creations with Favorites.

Features

Technical Data

Built-in / Free-standing: Built-in
Frothing nozzle: No
Display: Yes
Water protection system: Yes
Portion sizes: All cups
Dimensions: 455x594x385 mm
Dimensions of the packed product (HxWxD): ... 540 x 560 x 670 mm
Required niche size for installation (HxWxD): 449x558x376 mm
EAN code: 4242003895603
Fuse protection: 10 A
Nominal power: 220-240 V
Frequency: 50/60 Hz
Plug type: GARDY plug w/ earthing



Optional accessories

TZ40001	Insulated coffee jug
TZ70003	1 Brita Filter for Coffee Machine
TZ70033A	3 Brita Filter for Coffee Machine
TZ80001A	10 Cleaning Tablets for Coffee Machine
TZ80001B	10 Cleaning Tablets for Coffee Machine
TZ80002A	3 Descaling Tablets for Coffee Machine
TZ80002B	3 Descaling Tablets for Coffee Machine
TZ80004A	Care set Coffee Machine
TZ80004B	Care set Coffee Machine

iQ700, Built-in fully automatic coffee machine, Black CT918L1D0

Features

Flavour

- up to 29 different coffee specialties (within appliance and Home Connect app)
- warm milk, milk froth and hot water function
- aromaSelect – 3 different aroma profiles (mild-balanced-distinctive)
- adjustable milk ratio for classic milk-mix beverages
- intelligent strength adjustment – adaptive coffee management based on strength and size
- aromaDouble Shot – less bitterness in large beverages due to two brewing processes

Convenience

- TFT-Touchdisplay Pro - 6.8" TFT- color display with touch and slide functionality
- Fresh water connection with aqua stop for automated refilling of water tank
- Favorites: save up to 30 personalised beverages
- automatic milk amount detection - suitable for included container, 1 liter milk carton or your individual container
- coffee pot function
- height adjustable beverage outlet (up to 15 cm (max) high glasses)
- oneTouch DoubleCup – get two cups at the touch of a button
- 2.4 l removable water tank

Performance

- ceramDrive – high-quality grinder made of wear-resistant ceramic
- water pump with 19 bar pressure

Hygiene

- autoMilk Clean – automatic steam cleaning after every drink
- calc'nClean – combined descaling and cleaning program for less effort
- removable brewing unit – for easy and hygienic cleaning
- dishwasher-proof: beverage outlet, drip tray and drip pans
- automatic reminder for cleaning, descaling or water filter change

Home Connect

- remote control – operate your appliance from everywhere
- coffeePlaylist – select several drinks in the app, prepared in your chosen order
- additional coffee know-how
- software update – always the newest software status
- online support
- Security: Security is of top priority at Home Connect. The Home Connect app has been tested and certified by TÜV IT. And the encrypted data transfer via Home Connect protocol protects against unauthorised access.
- integrated 0,7 l milk container
- 400 g bean container with aroma protection lid
- illuminated coffee outlet, stage and interior
- adjustable grinding degree (multi-level)
- child lock


Accessories

- included accessories: test strip
- Separately available accessories: cleaning tablets (TZ80001...), descaling tablets (TZ80002...), BRITA Intenza water filter (TZ70003/TZ70033), care set for fully-automatic espresso makers (TZ80004...), adapter for milk carton (TZ70001), milk container (TZ90009)
- Material-number extension water inlet: 11019575 (available via customer service)

iQ700, Built-in fully automatic coffee machine, Black CT918L1D0


Dimensioned drawings

Measurements in mm

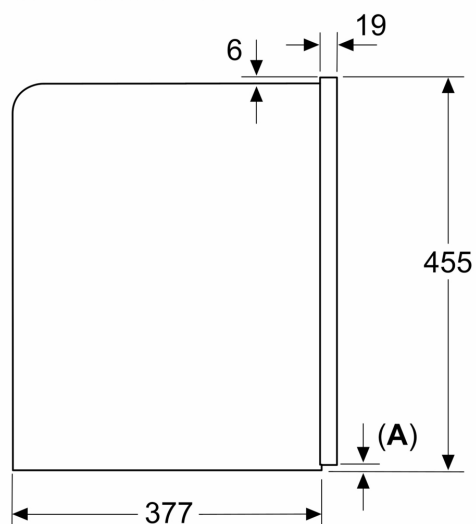


A: 7.5 mm

Measurements in mm

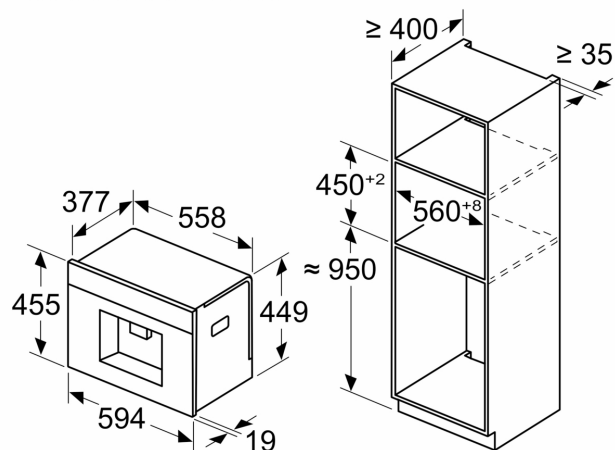

Bean and water containers are removed from the front
Recommended installation height
950–1450 mm


Measurements in mm

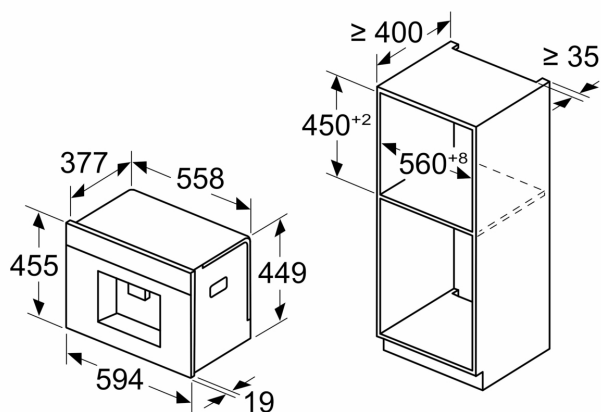

Bean and water containers are removed from the front
Recommended installation height
950–1450 mm

Measurements in mm


Left corner installation

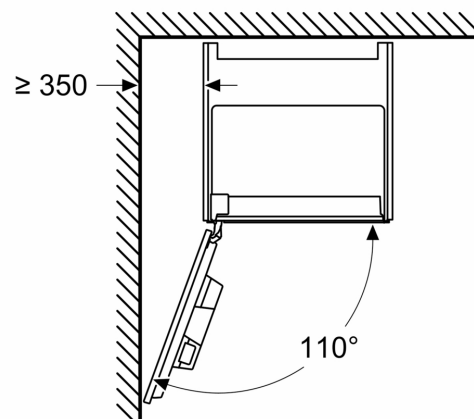

If using the 92° hinge limiter, the min. distance to the wall is only 100 mm

Dimensioned drawings

Measurements in mm

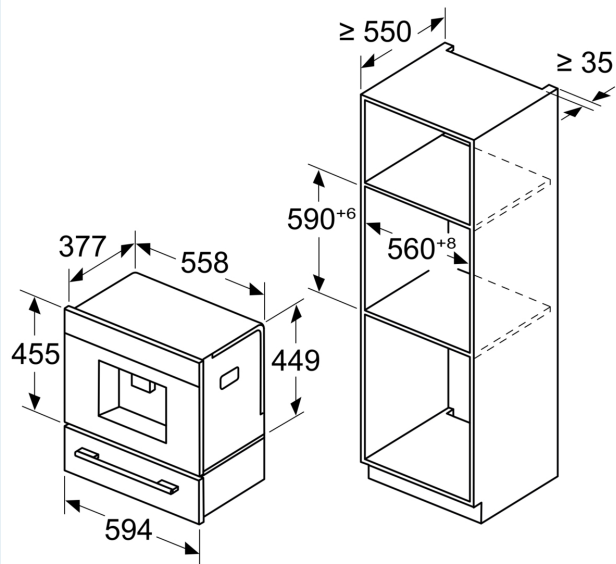

Measurements in mm

