

N 50, TELESCOPIC COOKER HOOD, 60 CM, SILVER METALLIC
D46ED22N1B



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Features

Technical Data

Typology: Pull-out
 Length electrical supply cord: 175 cm
 Required niche size for installation (HxWxD): 162mm x 526.0mm x 290mm mm
 Height of the appliance: 203 mm
 Minimum distance above an electric hob: 430 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 7.9 kg
 Type of control: Electronic
 Number of speed settings: 3-stages + intensive setting
 Maximum output air extraction: 268 m³/h
 Boost position output recirculating: 353 m³/h
 Maximum output recirculating air: 263 m³/h
 Boost position air extraction: 400 m³/h
 Maximum Air flow: 268 m³/h
 Number of lights: 2
 Noise level: 62 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code: 4242004250807
 Connection Rating: 74 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology: Built-in



Optional accessories

Z51TB1X4	Clean Air Standard odor filter (repl.)
Z51IT1X4	Clean Air Standard recirculation kit
Z54TH60D1	Design Handle strip

N 50, TELESCOPIC COOKER HOOD, 60 CM, SILVER
METALLIC
D46ED22N1B

Features

Features

- Electronic controls via Soft touch control
- 3 speeds plus intensive
- 2 x 1,5W LED
- Efficient BLDC technology
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 2 metal grease filter cassettes

Design

- 60 cm wide
- Silver metallic grey
- Handle strip specification: stainless steel with logo
- Filter cover stainless steel, perforated and dishwasher safe

Performance

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 268m³/h
 - Intensive 400 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 62 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 62dB(A) re 1 pW
 - Intensive: 69 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 294 lux
- Power rating: 74 W
- Average Energy Consumption: 21 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*





Planning and installation information

- Installation: Cupboard 60 cm
- Dimensions (HxWxD): 203 x 598 x 290 mm
- Built-in dimensions (HxWxD): 162 x 526 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

* In accordance with the EU-Regulation No 65/2014

N 50, TELESCOPIC COOKER HOOD, 60 CM, SILVER METALLIC
D46ED22N1B

Dimensioned drawings

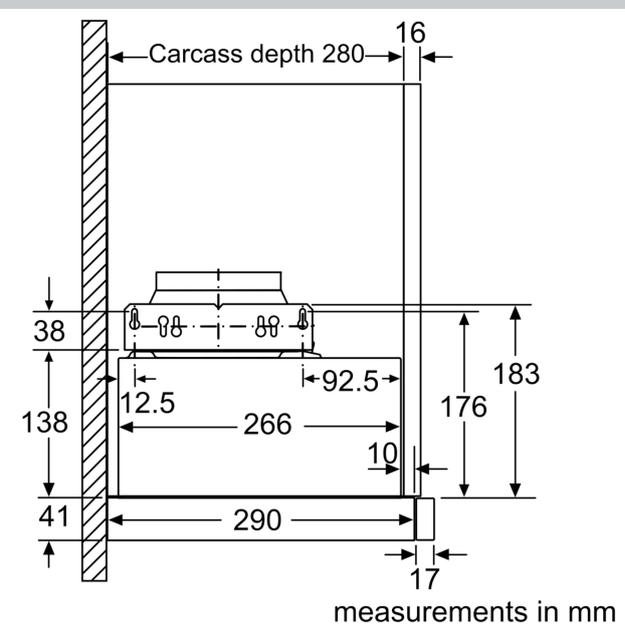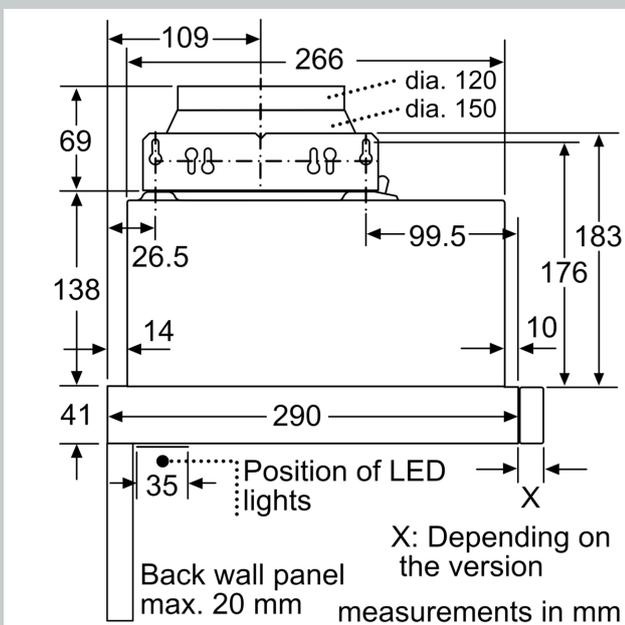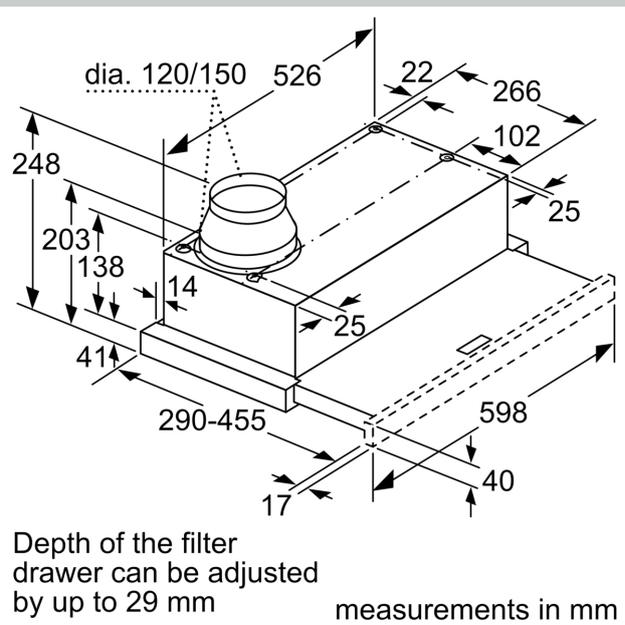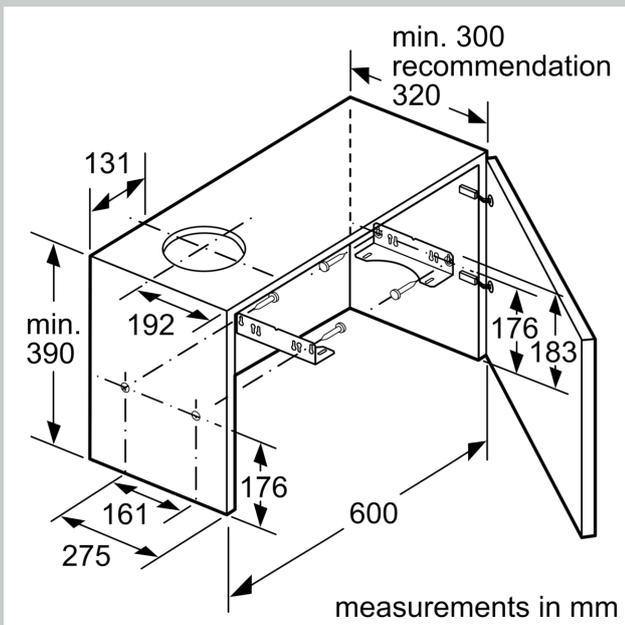

Dimensioned drawings

