

**Series 2, Telescopic cooker hood, 60 cm, Silver metallic  
DFM063W56B**



A\*\*\*  
↑  
D      C



DSZ4682	Handle strip white
DSZ4686	Handle strip black
DWZ1IT1B4	Clean Air Standard odor filter (repl.)
DWZ1IT1I4	Clean Air Standard recirculation kit

**Telescopic cooker hoods extend when in use and slide neatly away when not in operation.**

- Designed to look good, even when not in use.
- Quiet extraction with powerful performance
- High extraction rate - for continuously clean air in the kitchen.
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.

Typology:	Pull-out
Length electrical supply cord:	175.0 cm
Min. required niche size for installation (HxWxD):	162mm x 526.0mm x 290mm mm
Height of the appliance:	203 mm
Minimum distance above an electric hob:	430 mm
Minimum distance above a gas hob:	650 mm
Net weight:	8.5 kg
Type of control:	mechanical
Number of speed settings:	2
Max. air extraction:	328 m <sup>3</sup> /h
Max. air recirculation:	231 m <sup>3</sup> /h
Maximum Air flow:	328 m <sup>3</sup> /h
Number of lights:	2
Noise level:	64 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005231942
Connection rating:	93 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation typology:	Built-in



4 242005 231942

## **Series 2, Telescopic cooker hood, 60 cm, Silver metallic DFM063W56B**

**Telescopic cooker hoods extend when in use and slide neatly away when not in operation.**

### **Features**

- Rocker switch control for extractor speeds and light
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back
- Capacitor motor
- 2 power levels
- 2 x 1,5W LED
- 2 removable metal grease filter cassettes

### **Design**

- 60 cm wide
- Silver metallic lacquer
- Handle strip specification: stainless steel with logo
- Filter cover stainless steel, perforated and dishwasher safe

### **Performance**

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 328 m<sup>3</sup>/h
- Noise level according to EN 60704-2-13 at max.normal use exhaust air:64 dB(A)re 1 pW(A)re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 131 lux
- Power rating: 93 W
- Average Energy Consumption: 41.1 kWh/year\*
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*

### **Planning and installation information**



- Dimensions (HxWxD): 203 x 598 x 290 mm
- Built-in dimensions (HxWxD): 162 x 526 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

\* In accordance with the EU-Regulation No 65/2014



BOSCH

**Series 2, Telescopic cooker hood, 60 cm, Silver metallic  
DFM063W56B**

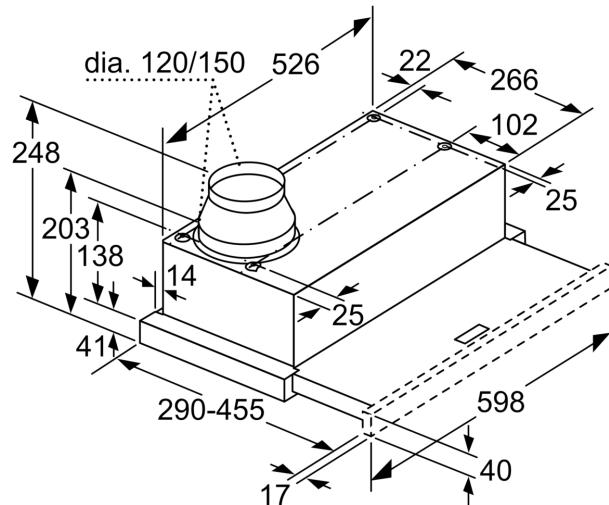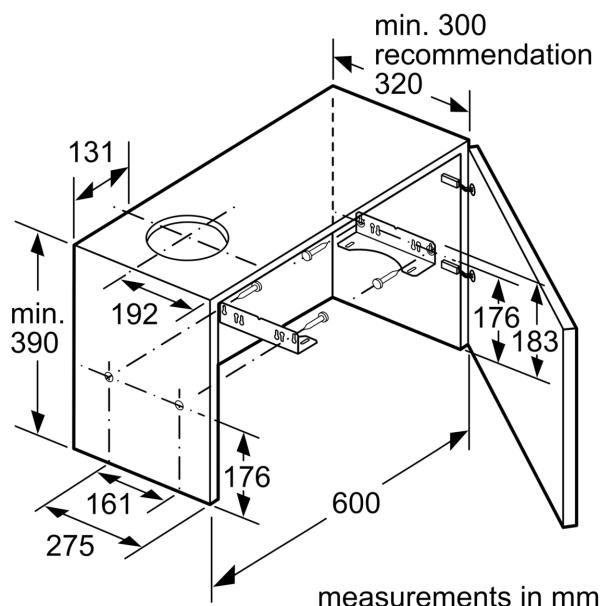

Depth of the filter drawer can be adjusted by up to 29 mm  
measurements in mm

