

**Series 2, Wall-mounted cooker hood,
60 cm, Black
DWB66BC60B**



Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- High extraction rate - for continuously clean air in the kitchen.
- Adjust the extraction intensity according to your cooking needs.
- Enjoy the benefits of a cleaner and healthier kitchen, free from excessive grease and unwanted odors.
- LED Illumination: The energy-saving lighting provides bright and clear lighting for the hob area.

- DWZ0DX0A0 Standard odor filter (replacement)
- DWZ0DX0U0 Standard recirculation kit
- DWZ0XX0J0 Long Life recirculation kit
- DWZ1DX1B4 Clean Air Standard odor filter (repl.)
- DWZ1DX1I4 Clean Air Standard recirculation kit
- DWZ1DX1I6 Clean Air Plus recirculation kit
- DZZ0XX0P0 Long Life odor filter (replacement)
- DZZ1XX1B6 Clean Air Plus odor filter (replacement)

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 583-912/583-1022 mm
 Height of the appliance: 53 mm
 Minimum distance above an electric hob: 550 mm
 Minimum distance above a gas hob:650 mm
 Net weight: 11.9 kg
 Type of control: mechanical
 Number of speed settings: 3
 Max. air extraction: 621 m³/h
 Max. air recirculation: 422 m³/h
 Maximum Air flow: 621 m³/h
 Number of lights: 2
 Noise level: 69 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code:4242005451135
 Connection rating: 220 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology:Wall-mounted



Series 2, Wall-mounted cooker hood, 60 cm, Black DWB66BC60B

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- DWB66BC60B

Design

- Chimney extractor hood
- Box design
- 60 cm wide
- Installation: wall
- Black
- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Dimensions exhaust air (HxWxD): 635-965 x 600 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 600 x 500 mm

Performance/technical information

- 3 power levels via Push button control
- Maximum extraction rate exhaust air 621 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use:422m³/h
- Noise level in recirculation mode: Max. normal use:74 dB(A) re 1 pW
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Energy efficiency class

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 46.5 kWh/year*


Technical Information

- Electrical cable length 1.3 m
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Power rating: 220 W
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

Special features


- Twin channel high performance fan motor
- 2 removable metal grease filter cassettes

**Series 2, Wall-mounted cooker hood,
60 cm, Black
DWB66BC60B**

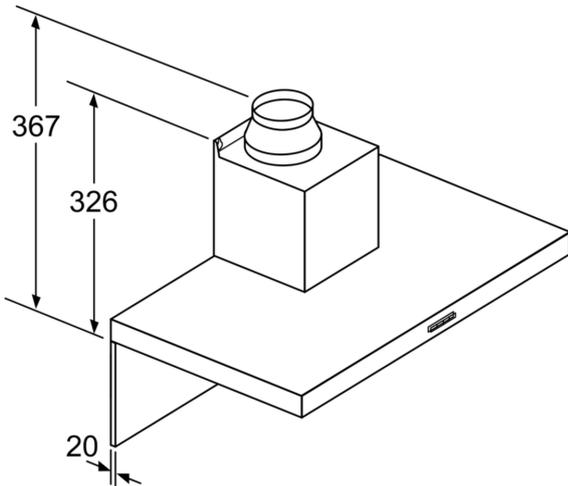


If a back panel is used,
the design of the appliance
must be considered. measurements in mm

Measurements in mm

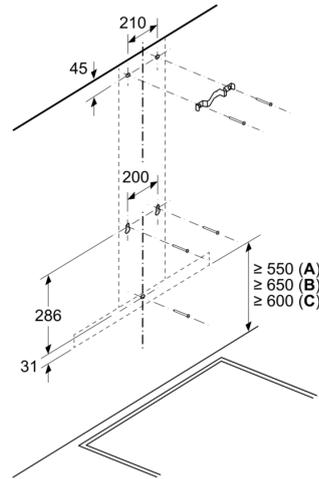


- A: Electric
- B: Gas - from upper edge of pan support
- C: Electric - for Australia and New Zealand

Measurements in mm

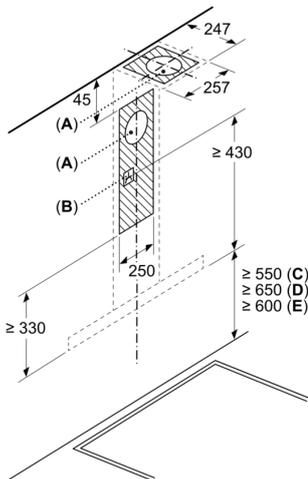

- A: Exhaust air outlet
- B: Socket
- C: Electric
- D: Gas - from upper edge of pan support
- E: Electric - for Australia and New Zealand

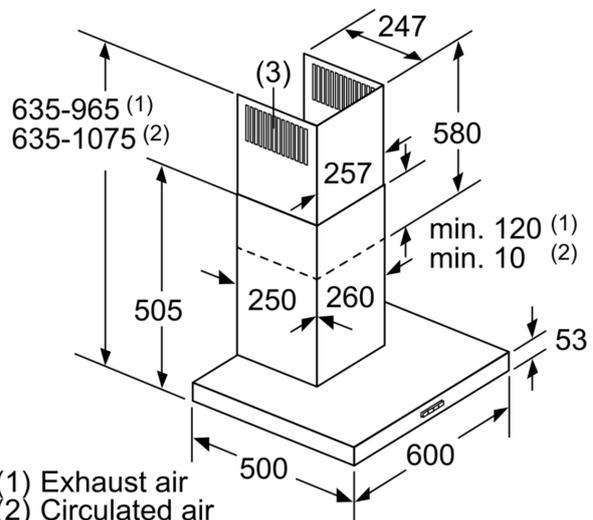

- (1) Exhaust air
 - (2) Circulated air
 - (3) Air outlet – slots for exhaust air
to be mounted facing down
- measurements in mm