


iQ500, Gas hob, 60 cm, Stainless steel
EC6A5HC90

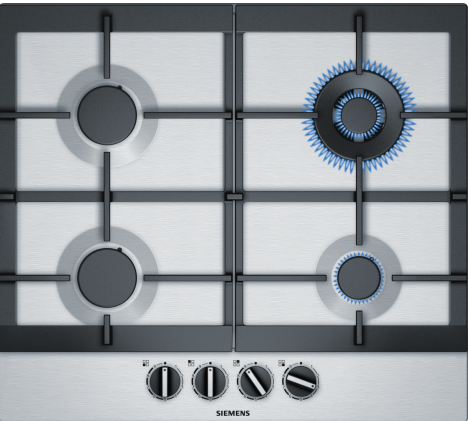

HZ233440	Wok ring
HZ241110	Small pot support
HZ298105	Simmer plate

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ This wok burner with up to 3.5 kW of power (depending on gas type) is ideal for a wide variety of foods, even in large quantities.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ The extremely convenient sword knob makes it easy to control and monitor the power level selected.

Product name/family: gas hob w
integrated controls
Built-in / Free-standing: Built-in
Source of energy: Gas
Number of cooking zones: 4
Type of control setting devices:sword knobs
Min. required niche size for installation (HxWxD):45 x 560-562 x
480-492 mm
Width of the appliance: 582 mm
Dimensions:53 x 582 x 520 mm
Dimensions of the packed product (HxWxD): ... 141 x 651 x 578 mm
Weight: 12.2 kg
Gross weight: 13.0 kg
Residual heat indicator:without
Location of control panel: Front
Basic surface material:Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 100.0 cm
EAN code:4242003742006
Gas connection rating: 8000 W
Fuse protection:3 A
Nominal power:220-240 V
Frequency: 60; 50 Hz



iQ500, Gas hob, 60 cm, Stainless steel EC6A5HC90

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner gas hob including:
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 8 KW

iQ500, Gas hob, 60 cm, Stainless steel
EC6A5HC90

