


iQ500, Gas hob, 75 cm, Stainless steel
EC7A5RB90

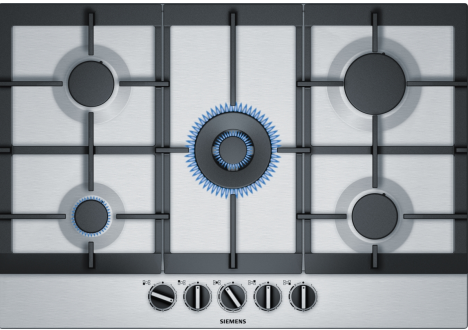

HZ211310	Simmer cap
HZ233540	Wok ring
HZ241110	Small pot support
HZ298105	Simmer plate

The gas hob with stepFlame Technology for precise flame control in nine steps.

✓ Biomethane ready – Power your gas hob with renewable biomethane gas.

Product name/family: gas hob w integrated controls
Built-in / Free-standing: Built-in
Source of energy: Gas
Number of cooking zones: 5
Type of control setting devices: sword knobs
Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm
Width of the appliance: 750 mm
Dimensions: 53x750x520 mm
Dimensions of the packed product (HxWxD): ... 145 x 793 x 597 mm
Weight: 15.0 kg
Gross weight: 16.5 kg
Residual heat indicator: without
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 100.0 cm
EAN code: 4242003676134
Gas connection rating: 12500 W
Fuse protection: 3 A
Nominal power: 220-240 V
Frequency: 50; 60 Hz



iQ500, Gas hob, 75 cm, Stainless steel EC7A5RB90

Design

- Stainless steel surface
- Cast iron pan supports

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 5 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 12.5 KW

iQ500, Gas hob, 75 cm, Stainless steel
EC7A5RB90

