


**iQ300, Gas hob, 60 cm, Stainless steel  
EG6B5PB90**

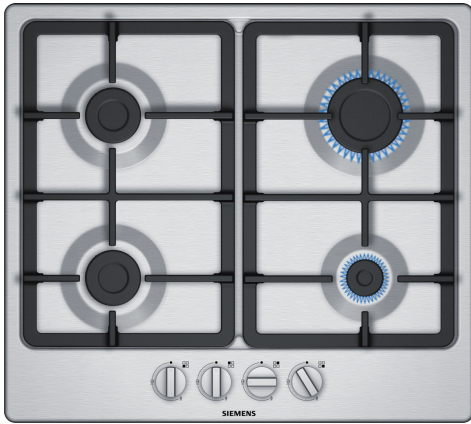

**Optional accessories**

HZ241110 Small pot support

**The gas hob with front-mounted controls.**

- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The sword knob combines highest ease of use with modern design.
- ✓ The uniquely beautiful stainless-steel surface design.

**Features**

**Technical Data**

Product name/family: ..... gas hob w  
integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Source of energy: ..... Gas  
 Number of cooking zones: ..... 4  
 Type of control setting devices: .....sword knobs  
 Min. required niche size for installation (HxWxD): ....45 x 560-562 x  
 480-492 mm  
 Width of the appliance: ..... 582 mm  
 Dimensions: ..... 53 x 582 x 520 mm  
 Dimensions of the packed product (HxWxD): ... 141 x 615 x 578 mm  
 Weight: ..... 9.6 kg  
 Gross weight: ..... 10.5 kg  
 Residual heat indicator: .....without  
 Location of control panel: ..... Front  
 Basic surface material: ..... Stainless steel  
 Color of surface: ..... Stainless steel  
 Length electrical supply cord: ..... 100.0 cm  
 EAN code: .....4242003836408  
 Gas connection rating: ..... 7500 W  
 Fuse protection: .....3 A  
 Nominal power: ..... 220-240 V  
 Frequency: .....50; 60 Hz



# iQ300, Gas hob, 60 cm, Stainless steel

## EG6B5PB90

### Features

#### Design

- Stainless steel surface
- Cast iron pan supports

#### Usage convenience

- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

#### Burners and power

- 4 burner gas hob including:
  - Left front: Standard burner up to 1.75 KW (depending on gas type)
  - Left rear: Standard burner up to 1.75 KW (depending on gas type)
  - Right rear: High-speed burner up to 3 KW (depending on gas type)
  - Right front: Economy burner up to 1 KW (depending on gas type)

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

iQ300, Gas hob, 60 cm, Stainless steel  
EG6B5PB90

Dimensioned drawings

