


## iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

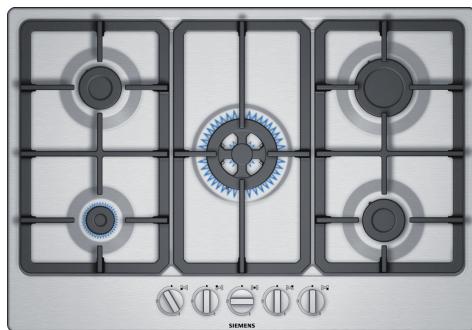

HZ298114 Small pot support  
HZ298105 Simmer plate  
HZ298108 Wok ring

The gas hob with front-mounted controls.

- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.

Product name/family: ..... gas hob w integrated controls  
Built-in / Free-standing: ..... Built-in  
Source of energy: ..... Gas  
Number of cooking zones: ..... 5  
Type of control setting devices: ..... sword knobs  
Required niche size for installation (HxWxD): ..... 45 x 560-562 x 480-492 mm  
Width of the appliance: ..... 750 mm  
Dimensions: ..... 53x750x520 mm  
Dimensions of the packed product (HxWxD): ... 145 x 793 x 597 mm  
Weight: ..... 12.9 kg  
Gross weight: ..... 14.5 kg  
Residual heat indicator: ..... without  
Location of control panel: ..... Front  
Basic surface material: ..... Stainless steel  
Color of surface: ..... Stainless steel  
Length electrical supply cord: ..... 150.0 cm  
EAN code: ..... 4242003830581  
Gas connection rating: ..... 10800 W  
Fuse protection: ..... 3 A  
Nominal power: ..... 220-240 V  
Frequency: ..... 50; 60 Hz



## iQ300, Gas hob, 75 cm, Stainless steel EG7B5QB90

### Design

- Stainless steel surface
- Cast iron pan supports

### Usage convenience

- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 5 burner gas hob including:
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 3.3 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 10.8 KW

**iQ300, Gas hob, 75 cm, Stainless steel  
EG7B5QB90**