


iQ500, Gas hob, 60 cm, Tempered glass, Black
EP6A6HB20

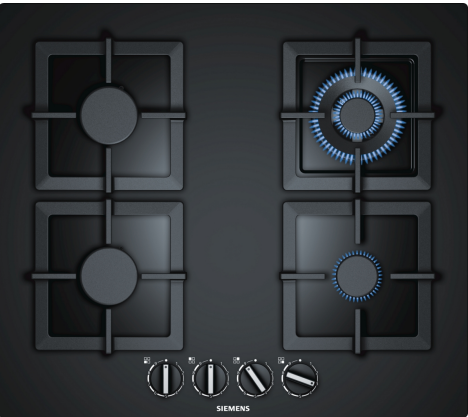

HZ211310	Simmer cap
HZ298105	Simmer plate
HZ298108	Wok ring
HZ298114	Small pot support

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ This wok burner with up to 3.5 kW of power (depending on gas type) is ideal for a wide variety of foods, even in large quantities.
- ✓ High-quality materials and workmanship – individual cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.

Product name/family: gas hob w integrated controls
Built-in / Free-standing: Built-in
Source of energy: Gas
Number of cooking zones: 4
Type of control setting devices:sword knobs
Required niche size for installation (HxWxD):45 x 560-562 x 480-492 mm
Width of the appliance: 590 mm
Dimensions: 58x590x520 mm
Dimensions of the packed product (HxWxD): ... 141 x 651 x 578 mm
Weight: 14.6 kg
Gross weight: 15.5 kg
Residual heat indicator:without
Location of control panel: Front
Basic surface material:Tempered glass
Color of surface: Black
Color of frame: Black
Length electrical supply cord: 100.0 cm
EAN code:4242003742389
Gas connection rating: 8000 W
Fuse protection:3 A
Nominal power:220-240 V
Frequency:60; 50 Hz



4 242003 742389

iQ500, Gas hob, 60 cm, Tempered glass, Black EP6A6HB20

Design

- Tempered Glass surface, black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron w rubber feet single

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 4 burner gas hob including:
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 8 KW

iQ500, Gas hob, 60 cm, Tempered
glass, Black
EP6A6HB20

