


iQ500, Gas hob, 75 cm, Tempered glass, Black EP7A6QI40

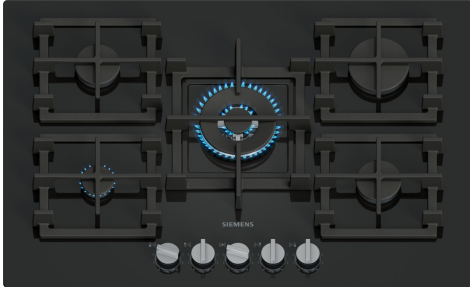

Tempered glass gas hob with stepFlame Technology for precise flame control, with detachable dials and semi-continuous pan supports for an easy cleaning.

- ✓ stepFlame Technology: Precise flame control with nine different settings
- ✓ Black tempered glass surface: Extremely heat-resistant
- ✓ Detachable metallic sword dials: Easily removable for easy cleaning and precise cooking control
- ✓ Semi-continuous pan support: Easy to handle and easy to clean
- ✓ Wok burner with 4.0 kW: Fast cooking with even heat distribution

Optional accessories

| | |
|----------|---------------------------|
| HZ298105 | Simmer plate |
| HZ298107 | Wok ring |
| HZ298114 | Small pot support |
| HZ32WA00 | Wireless food thermometer |
| HZ9SE040 | 4 pieces Set |
| HZ9SE060 | 6 pieces Set |

Features

Technical Data

| | |
|---|-------------------------------|
| Product name/family: | gas hob w integrated controls |
| Built-in / Free-standing: | Built-in |
| Source of energy: | Gas |
| Number of cooking zones: | 5 |
| Required niche size for installation (HxWxD): | 45 x 560-560 x 480-490 mm |
| Width of the appliance: | 752 mm |
| Dimensions: | 54x752x520 mm |
| Dimensions of the packed product (HxWxD): | 168 x 798 x 596 mm |
| Weight: | 19.9 kg |
| Gross weight: | 22.4 kg |
| Residual heat indicator: | Separate |
| Location of control panel: | Front |
| Basic surface material: | Tempered glass |
| Color of surface: | Black |
| Color of frame: | Black |
| Length electrical supply cord: | 100.0 cm |
| EAN code: | 4242003966778 |
| Gas connection rating: | 11500 W |
| Fuse protection: | 3 A |
| Nominal power: | 220-240 V |
| Frequency: | 50; 60 Hz |



iQ500, Gas hob, 75 cm, Tempered glass, Black EP7A6QI40

Features

Design

- Tempered Glass surface, black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet
- full metal

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner gas hob including:
 - Left front: Economy burner up to 1 KW (depending on gas type)
 - Left rear: Standard burner up to 1.75 KW (depending on gas type)
 - Center front: wok burner up to 4 KW (depending on gas type)
 - Right rear: High-speed burner up to 3 KW (depending on gas type)
 - Right front: Standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.
- Cast iron pan supports with rubber feet: little weight and compact form, yet high stability due to continuous surface.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- If installed flush, minimum worktop thickness is 30mm.
- Power cord: 1 m
- Connected load: 11.5 KW

iQ500, Gas hob, 75 cm, Tempered glass, Black
EP7A6QI40

Dimensioned drawings

