


**iQ700, Gas hob, 90 cm, Ceramic,
Black
ER9A6SB70**

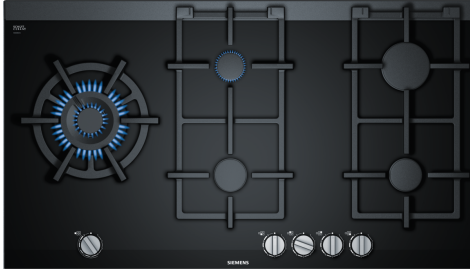

Gas cooktop with stepFlame Technology for precise flame control in nine steps.

HZ298105	Simmer plate
HZ298114	Small pot support

Product name/family: gas hob w
integrated controls
 Built-in / Free-standing: Built-in
 Source of energy: Gas
 Number of cooking zones: 5
 Type of control setting devices: sword knobs
 Min. required niche size for installation (HxWxD):45 x 850-852 x
 490-502 mm
 Width of the appliance: 912 mm
 Dimensions: 59x912x520 mm
 Dimensions of the packed product (HxWxD): . 170 x 1110 x 660 mm
 Weight: 18.2 kg
 Gross weight: 20.6 kg
 Residual heat indicator:without
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Color of frame: Black
 Length electrical supply cord: 150.0 cm
 EAN code:4242003925706
 Gas connection rating: 13800 W
 Fuse protection:3 A
 Nominal power: 220-240 V
 Frequency:50; 60 Hz



iQ700, Gas hob, 90 cm, Ceramic, Black ER9A6SB70

Design

- ceramic glass surface, black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 6.1 KW (depending on gas type)
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: Economy burner up to 1.1 KW (depending on gas type)
- Right rear: High-speed burner up to 2.8 KW (depending on gas type)
- Right front: Standard burner up to 1.9 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 912 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 13.8 KW

Accessories

- Wok ring included

**iQ700, Gas hob, 90 cm, Ceramic,
Black
ER9A6SB70**

