

GW051190

Optional accessories

installation accessories

warming drawer Gaggenau Expressive series  
60 x 14 cm  
GW051190

- Hygienic stainless steel and glass interior for effortless cleaning and elegant design
- Six power levels and four heating modes ensure consistent temperature control for various culinary needs
- 

#### Highlights

Integrable in 14 cm high niche

Bright interior lighting.

Cushioned closing system

Hygienic stainless steel interior with glass bottom

Direct temperature selection in the range 30 °C to 80 °C.

Also for low-temperature cooking, dough proving, herbs and fruits drying, chocolate melting and defrosting.

#### Heating methods

Preheating of small beverage containers.

Warming ovenware.

Keeping meals warm.

Low-temperature cooking.

Direct temperature control.

Personalisation function via Home Connect.

16 additional programmes via Home Connect.

#### Handling

Touch key operation.

#### Features

Net volume 20 litres.

Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.

Capacity load max. 25 kg.

Usable interior dimensions

W548 mm x H 92 mm x D 410 mm.

Heating system for even heat distribution and stable cavity temperature.

Glass bottom made of safety glass.

#### Selected digital services (Gaggenau Home Connect)

Additional programmes and recipes.

Remote control and monitoring.

Timing function.

#### Planning notes

Plan the niche without back wall.

Installation of GO/GS/GM/GC directly above the drawer without intermediate shelf.

Installation directly above a dishwasher is not allowed.

Attention: To open the fully integrated variant, a handle or a recessed grip is necessary.

Front weight up to 3 kg.

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.

Built-in under worktop or in single niche.


The mains socket must be accessible and located outside the built-in niche.

The socket can be planned behind the appliance.

#### Connection

Total connected load 0.82 KW.

Connection cable 1.75 m, pluggable.

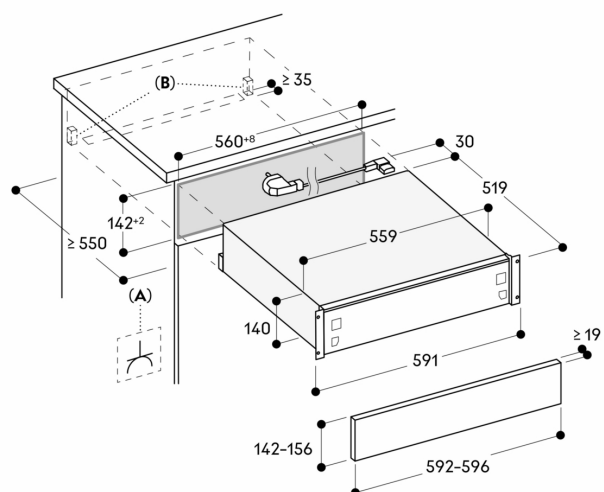

**A:** Accessible electrical connection  
**B:** Anti tilting

Measurements in mm