

## iQ700, Built-in oven, 60 x 60 cm, Stainless steel HB632GBS1B



Shorten your cooking time thanks to fast preheat and coolStart.

- ✓ fastPreheat – Heat the oven quickly. coolStart – Eliminate preheating for frozen foods.
- ✓ ecoClean: Cut down on oven cleaning
- ✓ TFT Display: good readability from any perspective.
- ✓ 4D hotAir – Even heat distribution for excellent results on any level.
- ✓ softMove: gentle opening and closing of the oven door.

### Features

#### Technical Data

Color / Material Front : Stainless steel  
 Construction type : Built-in  
 Integrated Cleaning system : Catalytic partial  
 Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 mm  
 Dimensions : 595 x 594 x 548 mm  
 Dimensions of the packed product (HxWxD) : 670 x 680 x 670 mm  
 Control Panel Material : Stainless steel  
 Door Material : Glass  
 Net weight : 34.8 kg  
 Usable volume of cavity : 71 l  
 Cooking method : , 4D Hotair, Conventional heat, Deep-frozen food special, Full width grill, Hot Air-Eco, Hot air grilling, Pizza setting  
 Oven control : electronic  
 Number of interior lights : 1  
 Approval certificates : CE, VDE  
 Length of electrical supply cord : 120 cm  
 EAN code : 4242003672495  
 Number of cavities (2010/30/EC) : 1  
 Energy efficiency rating : A+  
 Energy consumption per cycle conventional (2010/30/EC) : 0.87 kWh/cycle  
 Energy consumption per cycle forced air convection (2010/30/EC) : 0.69 kWh/cycle  
 Energy efficiency index (2010/30/EC) : 81.2 %  
 Connection rating : 3600 W  
 Fuse protection : 16 A  
 Voltage : 220-240 V  
 Frequency : 60; 50 Hz  
 Plug type : no plug

### Included accessories

- 2 x combination grid
- 1 x universal pan

### Optional accessories

- |          |  |
|----------|--|
| HZ915003 | Glass roasting dish, 5,4 L               |
| HZ638300 | 3 level telescopic rails, full ext       |
| HZ638100 | 1 level telescopic shelf rails, full ext |
| HZ636000 | Glass pan                                |
| HZ634000 | Baking and roasting grid (standard)      |
| HZ631070 | Baking tray, anthracite enamelled        |
| HZ625071 | Grill tray, anthracite enamelled         |
| HZ531010 | Baking tray, non-stick ceramic coated    |



## iQ700, Built-in oven, 60 x 60 cm, Stainless steel HB632GBS1B

### Features

#### Design

- 2.8" TFT Display
- Cavity inner surface: enamel anthracite
- Drop down oven door, softClose, softOpen
- 
- Stainless steel control dial
- We recommend you to choose complementary products within iQ700, in order to assure an optimal design combination of your Built-In appliances.

#### Features

- Digital temperature display with proposal
- Actual temperature display Heating-up indicator
- Control panel lock
- Automatic safety switch off Residual heat indicator Start button Door contact switch
- Electronic oven clock timer
- Integral cooling fan
- 5 shelf positions in oven

#### Cleaning

- EcoClean Direct : back panel

#### Programmes/functions

- Fast preheat
- Oven with 8 main functions, 8 main functions heating methods: 4D hot air, hotairGentle, conventional top & bottom heating, Conventional heat Gentle, hot air grilling, full width grill, Pizza setting, coolStart

#### Accessories




- 1 x universal pan, 2 x combination grid
- Cavity with shelf support rails

#### Technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
- Energy consumption per cycle in conventional mode:0.87 kWh
- Energy consumption per cycle in fan-forced convection mode:0.69 kWh
- Number of cavities: Main cavity Heat source: electrical Cavity volume:71 litres
- Temperature range 30 °C - 275 °C
- Total connected load electric: 3.6 KW
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwxh): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxh): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

**iQ700, Built-in oven, 60 x 60 cm,  
Stainless steel  
HB632GBS1B**

Dimensioned drawings

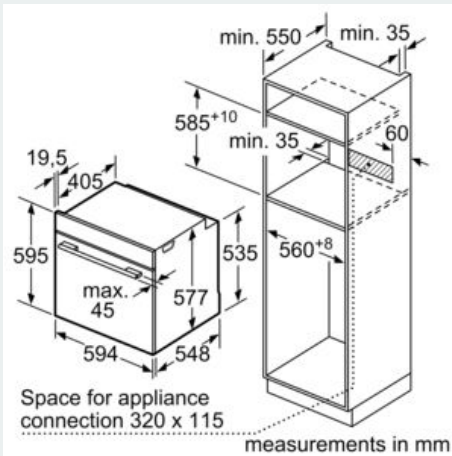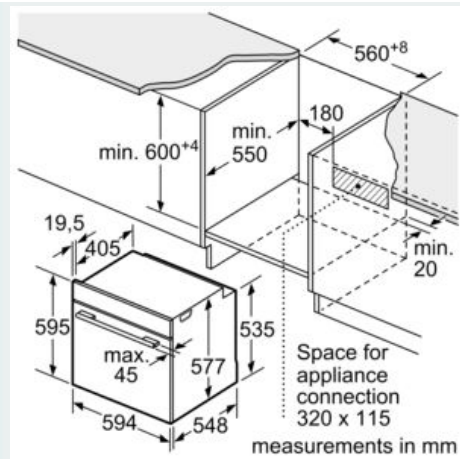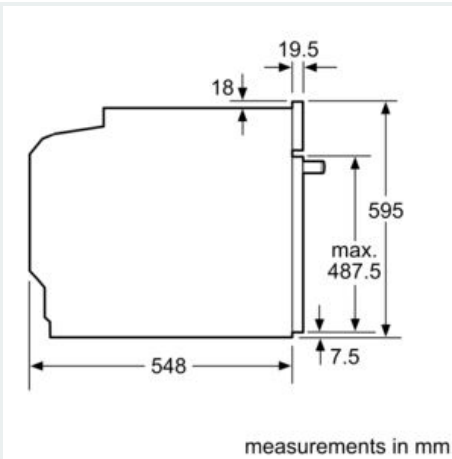

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm