

**Series 2, Free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look KGN34NLEAG**



**No Frost bottomfreezer : no need to defrost your freezer**

- **Perfect Fit:** place your fridge right next to walls or other appliances to save space.
- **LED lighting:** all your items in perfect view.
- **Multi Airflow System:** even air distribution for longer freshness.
- **Super Freezing function:** prevents the food in your freezer from defrosting.

Energy Efficiency Class: .....	E
Average annual energy consumption in kilowatt hour per year (kWh/a): .....	244 kWh/annum
Sum of volume of frozen compartments: .....	107 l
Sum of volume of chill compartments: .....	193 l
Airborne acoustical noise emissions : .....	42 dB(A) re 1pW
Airborne acoustical noise emission class: .....	D
Built-in / Free-standing: .....	Freestanding
Door panel options: .....	Not possible
Height: .....	1860 mm
Width of the appliance: .....	600 mm
Depth: .....	660 mm
Net weight: .....	62.1 kg
Connection rating: .....	100 W
Fuse protection: .....	10 A
Door hinge: .....	Right reversible
Voltage: .....	220-240 V
Frequency: .....	50 Hz
Length electrical supply cord: .....	240.0 cm
Number of compressors: .....	1
Number of independent cooling systems: .....	1
Interior ventilator: .....	No
Reversible Door Hinge: .....	Yes
Number of Adjustable Shelves in fridge compartment: .....	2
Shelves for Bottles: .....	No
No Frost free system: .....	Fridge and freezer
Installation typology: .....	Free-standing



## **Series 2, Free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look KGN34NLEAG**

- EU19\_Fast freezer facility\_D
- Noise Level : 42 dB , EU19\_Noise emission class\_D: D
- Temperature rise time : EU19\_Temperature rise time\_D: 12 H

### **No Frost bottomfreezer : no need to defrost your freezer**

#### **Design features**

- Stainless steel look doors and Pearl grey (VZF 07127) side panels
- Integrated horizontal handle
- Right hinged door, door reversible
- LED electronic control
- 1 compressor

#### **Food freshness system**

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.
- MultiAirflow system - improves circulation of air around the fridge

#### **Key features - Fridge section**

- Bright interior LED fridge light in fridge section
- 4 safety glass shelves (2 height adjustable)
- Door shelves in fridge door: 1 large and 2 small.
- Super Cooling: No

#### **Key features - Freezer section**

- NO\_FROST\_NEU\_BL, never have to defrost ever again
- 3 freezer drawers
- SuperFreezing function with automatic deactivation
- Calendar frozen food
- Freezer malfunction warning signal: optical and acoustical warning system

#### **Additional features**

- Optical and acoustical
- 3 x egg tray, 1 x ice cube tray

#### **Dimension and installation**

- Connection value 100 W
- 220 - 240 V
- Height adjustable front feet
- Dimensions: 186 cm H x 60 cm W x 66 cm D
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.


#### **Functions**

#### **Performance and Consumption**

- EU19\_EEK\_D: E
- Total Volume : 300 l
- Net Fridge Volume : 193 l
- Net Freezer Volume : 107 l
- Freezing capacity 24h : 12 kg
- Annual Energy Consumption: 244 kWh/a
- Climate Class: SN-T


**Series 2, Free-standing fridge-freezer  
with freezer at bottom, 186 x 60 cm,  
Stainless steel look  
KGN34NLEAG**

Appliance name	a	b	c	d	e	f	g
KGN33 (Inner handle)	1760	600	660	590	600	1210	12



Description
a Height
b Width
c Depth with door closed, without handle
d Cabinet depth
e Width with door opened to 90°
f Depth with door opened
g Air gap for installation in recess or fitted cabinet

measurements in mm

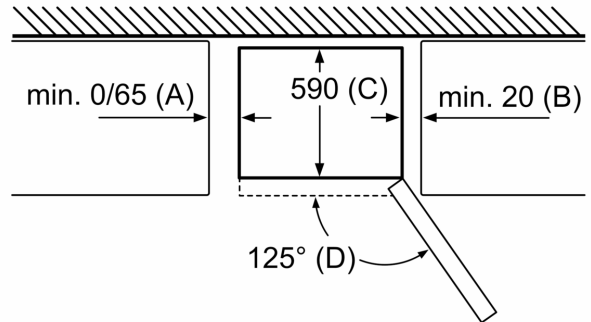

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

**Dimension A:**  
In models with vertical integrated handles,  
in order to open easily, a minimum distance  
of 65 mm is needed.

measurements in mm