


## iQ300, Canopy cooker hood, 53 cm, Silver metallic LB55565GB

C

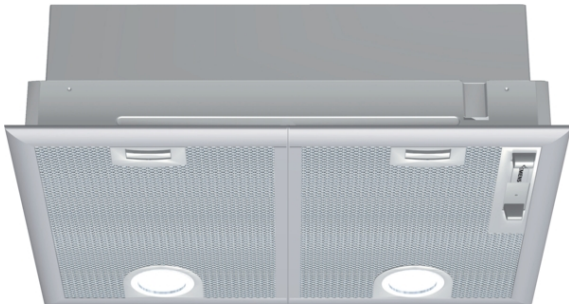

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ LED lights: for optimal visibility and ambience while cooking.
- ✓ Extremely quiet – The quiet hood that keeps the calm your kitchen.

### Features

#### Technical Data

Typology : Built-in/Built-under  
 Approval certificates : CE, E17D UKCA marking, VDE  
 Length of electrical supply cord : 130 cm  
 Required niche size for installation (HxWxD) : 255mm x 500.0mm x 350mm mm  
 Minimum distance above an electric hob : 650 mm  
 Minimum distance above a gas hob : 650 mm  
 Net weight : 7.5 kg  
 Type of control : mechanical  
 Maximum output air extraction : 363 m<sup>3</sup>/h  
 Boost position output recirculating : 395.0 m<sup>3</sup>/h  
 Maximum output recirculating air : 268 m<sup>3</sup>/h  
 Boost position air extraction : 618 m<sup>3</sup>/h  
 Number of lights (Stck) : 2  
 Noise level : 56 dB(A) re 1 pW  
 Diameter of air outlet : 120 / 150 mm  
 Grease filter material : Washable aluminium  
 EAN code : 4242003838396  
 Connection rating : 206 W  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 50 Hz  
 Plug type : GB plug  
 Installation type : Built-in

### Optional accessories

LZ73050 Standard odor filter



## iQ300, Canopy cooker hood, 53 cm, Silver metallic LB55565GB

### Features

#### Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 618 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB\*

#### Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

#### Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Mechanical

#### Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591 ø 15 cm:
  - max. Normal use 362m<sup>3</sup>/h
  - Intensive 618 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
  - Max. normal use: 56dB(A) re 1 pW
  - Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 530 x 380mm
- Built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 79.8 kWh/year\*

#### Optional accessories

- Recirculating kit LZ73050

\* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy cooker hood, 53 cm,  
Silver metallic  
LB55565GB

Dimensioned drawings

