

iQ100, Wall-mounted cooker hood, 60 cm, Stainless steel LC64PBC50B



LZ12240	Chimney extension 500 mm
LZ12340	Chimney extension 750 mm
LZ50660	Backboard 60 x 65 cm
LZ50661	Backboard 60 x 72 cm
LZ52750	Standard recirculation kit
LZ52751	Standard odor filter (replacement)

Pyramid design extractor hood with a high extraction rate.

✓ Illuminate your cooking space with LED lights for optimal visibility and ambience setting.

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	553-730/573-730 mm
Height of the appliance:	246 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Weight:	7.9 kg
Control panel:	mechanical
Number of speed settings:	3
Maximum output air extraction:	365 m³/h
Maximum output recirculating air:	211 m³/h
Maximum Air flow:	365 m³/h
Number of lights:	2
Noise level:	66 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242003801284
Connection Rating:	100 W
Fuse protection:	10 A
Nominal power:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation type:	Wall-mounted



iQ100, Wall-mounted cooker hood, 60 cm, Stainless steel LC64PBC50B

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 66 dB dB*

Features

- Push button control for extractor speeds and light
- 3 x power levels
- Twin channel high performance fan motor
- 2 x 1.5W LED
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes
- Installation: wall

Design

- Chimney hood
- Mechanical

Performance/technical information


- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 66 dB(A) re 1 pW
- Extraction rate in recirculation mode:
- Max. normal use: 211 m³/h
- Noise level in recirculation mode:
- Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 104 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 799-975 x 600 x 500 mm
- Dimensions recirculating, chimney (HxWxD): 799-975 x 600 x 500mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories

- Recirculating kit LZ12240


* In accordance with the EU-Regulation No 65/2014

iQ100, Wall-mounted cooker hood, 60 cm, Stainless steel
LC64PBC50B

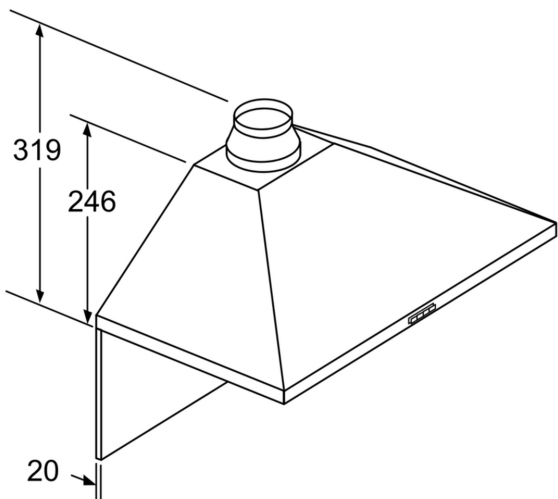


If a back panel is used,
the design of the appliance
must be considered.


measurements in mm

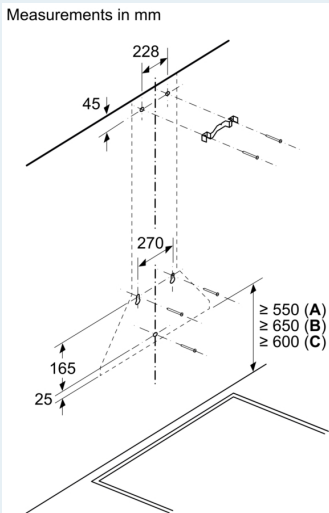

- A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

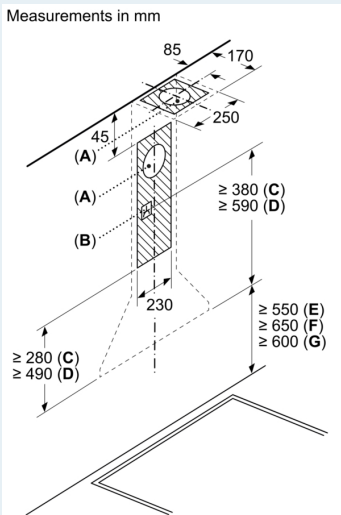

- A: Exhaust-air outlet
B: Socket
C: Exhaust air
D: Circulated air
E: Electric
F: Gas - from upper edge of pan support
G: Electric - for Australia and New Zealand

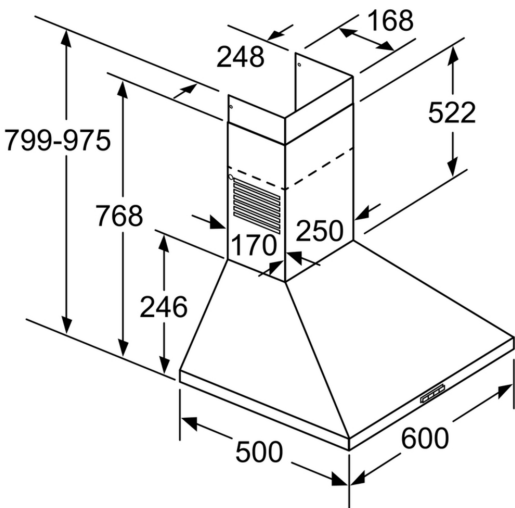

measurements in mm