


iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B



Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ LED lights: for optimal visibility and ambience while cooking.
- ✓ Extremely quiet – The quiet hood that keeps the calm your kitchen.
- ✓ touchControl: quickly and easily manage the power levels and the LED light

Features

Technical Data

Typology : Wall-mounted
 Approval certificates : CE, E17D UKCA marking, VDE
 Length of electrical supply cord : 130 cm
 Height of product, without chimney : 323 mm
 Minimum distance above an electric hob : 450 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 21.9 kg
 Type of control : Electronic
 Maximum output air extraction : 416 m³/h
 Boost position output recirculating : 469 m³/h
 Maximum output recirculating air : 367 m³/h
 Boost position air extraction : 700 m³/h
 Number of lights (Stck) : 2
 Noise level : 58 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 EAN code : 4242003761007
 Connection rating : 263 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : GB plug
 Installation type : Wall-mounted



Optional accessories

- LZ31XXB16 Clean Air Plus odor filter (replacement)
- LZ11AXE61 Chimney standard black
- LZ11AKV16 Clean Air Plus recirc. kit (chimless)
- LZ11AKI16 Clean Air Plus recirculation kit
- LZ10AXL50 Chimney extension 1500 mm
- LZ10AXK50 Chimney extension 1000 mm
- LZ10AKS00 Long Life recirculation kit
- LZ10AKR00 Long Life recirculation kit (chimless)

iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 416 m³/h
- Intensive 700 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 58 dB dB*

Features

- 3 x power levels plus intensive setting
- 2 x 1.5W LED
- Colour Temperature: 3500 K
- Twin channel high performance fan motor
- Automatic intensive revert (6mins)
- 2 x metal grease filter cassettes
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

Design

- Black glass
-
- Chimney hood
- touchControl for extractor speeds and light
- Electronic control

Performance/technical information

- Suitable for ducted and re-circulating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Installation system: Wall fixing inclined/flat/cube
- Max. extraction rate: 700 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 58 dB(A) re 1 pW
- Intensive: 67 dB(A) re 1 pW
- Power rating: 263 W
- Light Intensity: 90 lux
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 790 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 988-1258 x 790 x 499 mm
-
- Dimensions recirculating, chimless (HxWxD): 452 mm x 790 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1118 x 790 x 499 mm - mounting with outer chimney
- 1188-1458 x 790 x 499 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: B*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 56.6 kWh/year*


Optional accessories

- Recirculating kit LZ10AXL50


* In accordance with the EU-Regulation No 65/2014

iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B

Dimensioned drawings

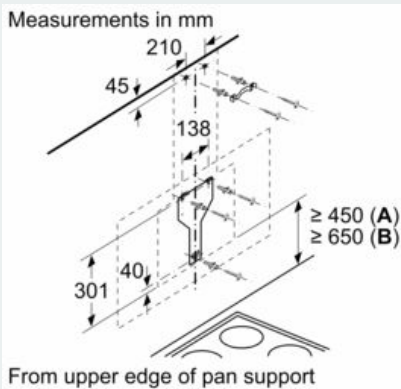


A: Electric
B: Gas

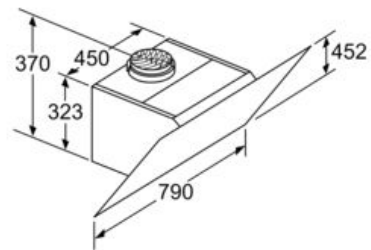


Appliance in circulated air mode without duct
Circulated air set required

measurements in mm

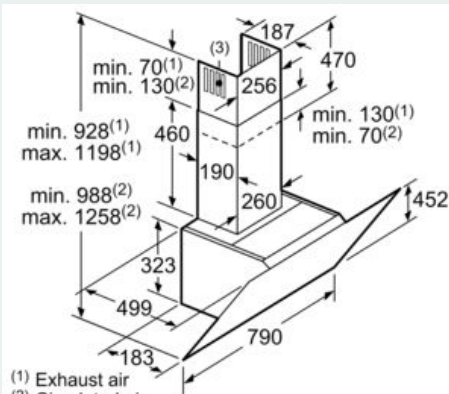

(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down


measurements in mm

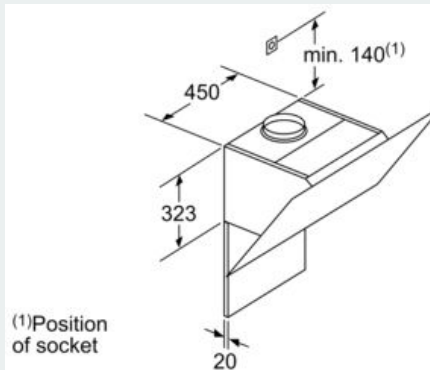


(1) Position of socket

Note the maximum thickness of the back panel.

measurements in mm

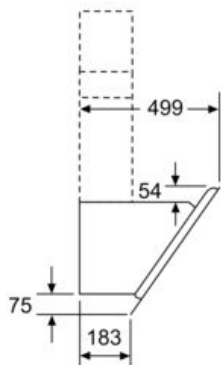

measurements in mm

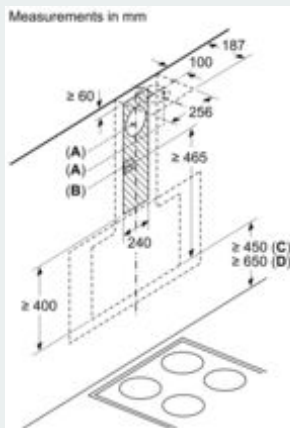

A: Exhaust air
B: Socket

From upper edge of pan support

C: Electric
D: Gas