SIEMENS

iQ100, Wall-mounted cooker hood, 90 cm, Stainless steel LC94PBC50B

D

Optional accessories

LZ52751	Standard odor filter (replacement)
LZ12240	Chimney extension 500 mm
LZ12340	Chimney extension 750 mm
LZ50960	Backboard 90x65cm
LZ50961	Backboard 90 x 72 cm
LZ52750	Standard recirculation kit

Pyramid design extractor hood with a high extraction rate.

✓ LED lights: for optimal visibility and ambience while cooking.

Features

Technical Data

Typology: ..... Wall-mounted
Length electrical supply cord: ..... 130.0 cm
Height of the chimney: ..... 553-730/573-730 mm
Height of the appliance: ..... 246 mm
Minimum distance above an electric hob: ..... 550 mm
Minimum distance above a gas hob: ..... 650 mm
Weight: ..... 10.8 kg
Control panel: ..... mechanical
Number of speed settings: 3
Maximum output air extraction: ..... 365 m³/h
Maximum output recirculating air: ..... 213 m³/h
Maximum Air flow: ..... 365 m³/h
Number of lights: 2
Noise level: ..... 65 dB(A) re 1 pW
Diameter of air outlet: ..... 120 / 150 mm
Grease filter material: ..... Washable aluminium
EAN code: 4242003801314
Connection Rating: ..... 100 W
Fuse protection: ..... 10 A
Nominal power: ..... 220-240 V
Frequency: ..... 50; 60 Hz
Plug type: ..... GB plug
Installation type: ..... Wall-mounted

4 242003 801314

SIEMENS

iQ100, Wall-mounted cooker hood, 90 cm, Stainless steel LC94PBC50B

Features

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m3/h
- Noise max. Normal Level: Noise, max. speed in normal us: 65 dB dB*

Features

- Push button control for extractor speeds and light
- 3 x power levels
- Twin channel high performance fan motor
- 2 x 1.5W LED
- Colour Temperature: 3500 K
- 3 x metal grease filter cassettes - dishwasher safe
- Installation: wall

Design

- Chimney hood
- Mechanical

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recurculation kit (accessory) is needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 65 dB(A) re 1 pW
- Extraction rate in recirculation mode:
- Max. normal use:213 m³/h
- Noise level in recirculation mode:
- Max. normal use:67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 94 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating, chimney (HxWxD): 799-975 x 900 x 500mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories

- Recirculating kit LZ52751

* In accordance with the EU-Regulation No 65/2014

SIEMENS

iQ100, Wall-mounted cooker hood, 90 cm, Stainless steel
LC94PBC50B
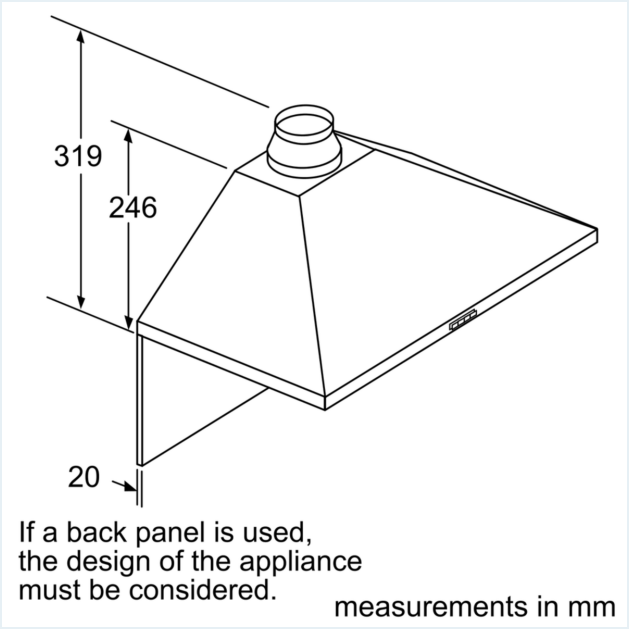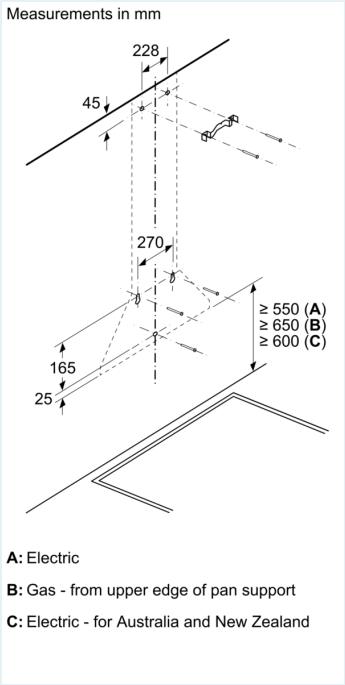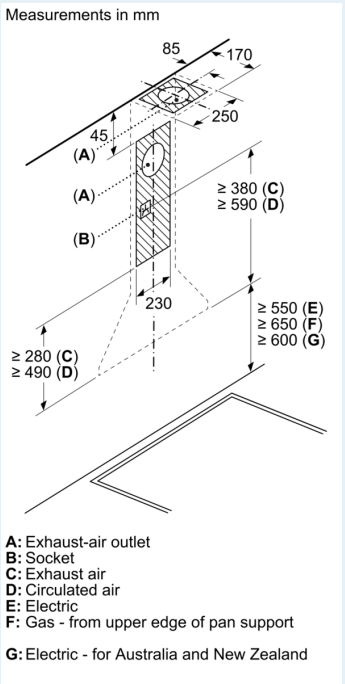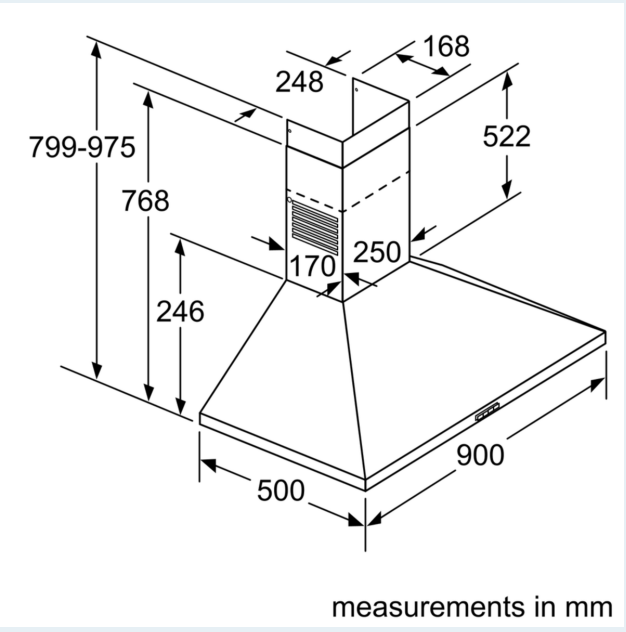
Dimensioned drawings