

iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed LC97FVW69B



B



Flat design extractor hood with high extraction rate for a powerful performance.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ cookConnect and climateControl sensor: detects and removes steam and odours automatically
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ voiceControl – Control hood functions and lighting using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

Features

Technical Data

Typology : Wall-mounted
 Approval certificates : CE, E17D UKCA marking, G-Mark, VDE
 Length of electrical supply cord : 130 cm
 Height of product, without chimney : 430 mm
 Minimum distance above an electric hob : 450 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 24.6 kg
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction : 394 m³/h
 Boost position output recirculating : 404 m³/h
 Maximum output recirculating air : 249 m³/h
 Boost position air extraction : 717 m³/h
 Number of lights (Stck) : 2
 Noise level : 57 dB(A) re 1 pW
 Diameter of air outlet : 150 / 120 mm
 Grease filter material : Other
 EAN code : 4242003804285
 Connection rating : 150 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

LZ31XXB16	Clean Air Plus odor filter (replacement)
LZ11AXE61	Chimney standard black
LZ11AFV16	Clean Air Plus recirc. kit (chimless)
LZ11AFI16	Clean Air Plus recirculation kit
LZ10AXL50	Chimney extension 1500 mm
LZ10AXK50	Chimney extension 1000 mm
LZ10AFR00	Long Life recirculation kit (chimless)



4 242003 804285

iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed LC97FVW69B

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 394 m³/h
- Intensive 717 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 57 dB dB*

Home Connect: Remote Monitoring and Control

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)

Features

- climateControl sensor
- Additional functions: Ambient light RGB
- Boost function
- cookConnect hob based hood control
- 3 power levels and 2 intensive settings
- softLight with dimmer function
- 2 x 3w LED Light
- Colour Temperature: 3500 K
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (Automatic after running (10 minutes))
- Automatic intensive revert (6mins)
- Black grease filter
- Grease and charcoal filter saturation indicators
- easy to clean Inner frame
- 2 x metal grease filter cassettes

Design

- Black glass
-
- Chimney hood
- Installation: wall
- touchControl for extractor speeds and light
- Electronic control
- Rim ventilation
- Installation system: Wall fixing inclined/flat/cube

Performance/technical information

- Suitable for ducted and re-circulating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 717 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 57 dB(A) re 1 pW
- Intensive: 70 dB(A) re 1 pW
- Power rating: 150 W
- Light Intensity: 589 lux

- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 969-1239 x 890 x 263 mm
- Dimensions recirculating, chimney (HxWxD): 1029-1299 x 890 x 263 mm
-
- Dimensions recirculating, chimless (HxWxD): 500 mm x 890 x 263 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1159 x 890 x 263 mm - mounting with outer chimney
- 1229-1499 x 890 x 263 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 40 kWh/year*


Optional accessories

- Recirculating kit LZ10AXL50

* In accordance with the EU-Regulation No 65/2014

iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed LC97FVW69B

Dimensioned drawings

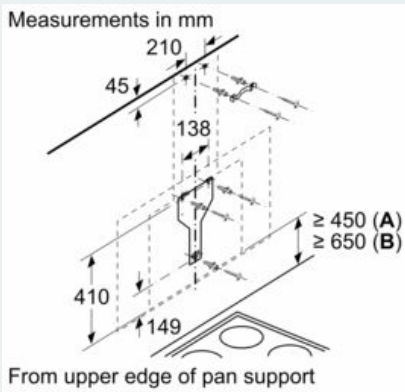

A: Electric
B: Gas

